Wiha Catalogue 2010 – 2012

wiha

Premium Tools

Wiha Schonach (Headquarters)

Wiha Mönchweiler

Wiha Buchs (KWB AG)

Wiha Danzig

Wiha Song Cong

Dear Wiha customers,

the company of Wiha represents quality and innovation, indeed now for more than seventy years.
These firmly anchored principles are also to be seen in the new face of the brand: a bridge spanning quality accumulated over time to constant innovation. Wiha stands for premium tools with the highest claim to quality, a fact that is reflected all the more succinctly with the shorter slogan. Premium tools from Wiha!

A close orientation to the needs of users and a level of product expertise gathered over decades serve as a guarantee for globally innovative new products and problem solvers that Wiha will also be presenting to you in this catalogue. The new assortment consequently covers a variety of tool innovations that are especially matched to the VDE and L-key segments for example.

Wiha will be placing a focus in the 2010 product catalogue on its expertise in the pliers sector. As such the pliers assortment for 2010 represents a further highlight for the product catalogue. The introduction of the new pliers design means innovations for you that are globally unique, such as the Wiha DynamicJoint, guaranteeing cutting performance never before experienced until now. In external competition comparisons the results were clear: the Wiha pliers were judged to be the winners and the best cutters of all. A fact that further underlines the expertise of Wiha as a pliers manufacturer.

Your demand for quality represents a constant challenge for us, from development right up until the finished product. Indeed you can experience that for yourself throughout the complete product assortment.

With a level of self-produced products approaching 100% and a clear commitment to Germany as a manufacturing location, Wiha is an internationally leading manufacturer in the hand tools sector.

With my name I personally vouch for the services of my company.

Wilfried Hahn

wiha 70 years

1939 – 2009: Wiha. Premium Tools for Professionals. » 2010: wiha Premium Tools

Wiha Services

Orders:
- By phone, fax, email or EDI

Consulting service:
- Field service incl. key accounts everywhere on site
- Internal service can be reached from 7:30 am – 5 pm CET by phone

eBusiness (for catalogue articles):
- Media-neutral database for data export
- eClass classification
- BMEcat Version 1.2

Warranty:
- 5-year warranty on materials and workmanship

Quality level:
- ISO 9001:2008
- Production depth far above average
- Virtually 100% own production

Patents and licenses:
- over 80 trademark rights (patents or registered designs)
- long-term cooperation with licensors guarantees maximum quality and fitting accuracy of tools

Special articles:
- Production of semi-standard and drawing-dependent tools. Just ask us!

Sales aids:
- CD or DVD with article data and photos
- Equipment consulting with sales aids
- Presentation materials

Wiha content.

Product range.

▶ See symbols key, page 325

Screwdrivers 6 – 39

Torque screwdrivers 40 – 53

Reversible blade systems 54 – 67


Hex keys 68 – 109

Bits 110 – 171

Pliers 172 – 203

Soft-face hammers 204 – 213

Measuring tools 214 – 220

Articulated hoses 221 – 223

VDE tools 224 – 259

ESD tools 260 – 291

Stainless steel tools 292 – 301

How to find the correct tip? 302 – 303
Technical specifications 304 – 309
List of order numbers 310 – 317
Article series 318 – 319
Wiha values 320 – 324

NEW

Wiha product innovations.

The clever addition to our assortment.

Screwdrivers

Wiha SoftFinish® with mm scale 13

Torque screwdrivers

TorqueVario®-S Torque screwdriver set TORX® / TORX PLUS® 46

TorqueFix® Torque screwdriver 0.8 / 1.2 / 5.0 / 6.0 Nm 47

easyTorque torque screwdriver with blade 47

VDE tools

Wiha slimTECHNOLOGY – The innovation for VDE fastening tools.

– Wiha SoftFinish® electric slimFix 229
– Wiha SoftFinish® electric slimVario 234
– Torque VDE interchangeable blades 243

Wiha SoftFinish® electric single-pole voltage tester 239

Wiha Professional electric pliers:
Electrician's diagonal cutters with DynamicJoint 248

Cable cutters 248

L-keys

Wiha ErgoStar Convenient and quick – it just can't get better 70

Universal holder Pure functionality – everything in one row from: 74

Ball end hex L-key set, 7 pcs. 79

Hex L-key set, 7 pcs. 81

Hex L-key set, short, 7 pcs. 83

Ball end hex L-key, colour-coded 85

L-key set, 7 pcs. 85

TORX® MagicSpring® L-key set, 8 pcs. 87

TORX PLUS® MagicSpring® L-key set, 8 pcs. 88

TORX® L-key sets, 7 pcs. / 8 pcs. 91

Wiha ComfortGrip T-handle:
– ball end hex with side blade 100
– hex –
– TORX® 101



Bits

Standard bit, TORX PLUS®, 25 mm, style C 6.3 3IP 124

Standard bit, Phillips, style E 6.3 PH0 x 70mm, PH0 x 90 mm 128

Standard bit, TORX® with MagicSpring®, 25 mm, style E 6.3 T10 / T15 / T20 / T25 / T30 / T40 128

Standard bit, hex, 70 mm, style E 6.3 2.0 / 2.5 / 3.0 / 4.0 / 5.0 / 6.0 / 8.0 131

Threaded bit M5, TORX®, 45 mm, T10 / T15 / T20 / T25 132

CentroFix quick release holder, magnetic style E 6.3 148

Quick release holder, magnetic SDS-Plus® 149

Wiha Collector 3 bit boxes in a new look 162

Wiha SB bit programme:
Stainless steel bits PH, PZ, TORX®
TiN Torsion bits TORX®
Standard bit TORX®, 10xT15 167 – 168

CentroFix quick release holder, magnetic 170

Pliers

New pliers design in the following series:
– Wiha Professional from: 180
– Wiha Industrial 185
– Wiha Basic 189
– Wiha Professional electric 246

Wiha DynamicJoint: New joint construction for long-term cutting efficiency with combination pliers/high-leverage combination pliers,diagonal cutters/heavy-duty diagonal cutters, in the series
– Wiha Professional from: 180
– Wiha Industrial 185
– Wiha Basic 189
– Wiha Professional electric 246

Wiha Basic:
Cable cutters 191

Wiha Basic:
Wiha MagicTips 195

Unique latching function prevents jumping away of the safety rings

Wiha Basic:
Pliers set Basic Circlip, 4 pcs. with DynamicJoint 199



Wiha product line directory.

Where do I find it?

Screwdrivers

The Wiha screwdriver concept
Wiha SoftFinish® 10
Wiha SoftFinish® Stubby screwdrivers 13
Wiha SoftFinish® with mm scale 13
Wiha MicroFinish 20
Wiha Classic screwdrivers 24
Wiha pocket screwdrivers 28
Wiha wooden handle screwdrivers 32
Wiha PicoFinish 34
Wiha SoftFinish® stainless steel 296

Wiha VDE screwdrivers
Wiha SoftFinish® electric 228
Wiha SoftFinish® electric slimFix 228
Wiha T-handle electric 231
Wiha SoftFinish® electric slimVario 234
Wiha SoftFinish® electric Xeno 236
Wiha Classic electric 238
Wiha voltage testers 239
Wiha Torque VDE screwdrivers 242

Wiha ESD screwdrivers
Wiha SoftFinish® ESD 264
Wiha Precision ESD 267
Wiha Ceramic 271

Wiha special tools
Wiha seal scraper, trim pin remover 27
Wiha square reamer, awl 27
Wiha screw extractor set 28
Wiha magnetisers/ demagnetisers 29
Wiha universal scraper 30

Torque screwdrivers

The Wiha torque programme
Wiha torque screwdrivers 42

Wiha easyTorque 47
Wiha T-handle torque tools 50

Wiha Torque VDE screwdrivers 242
Wiha Torque ESD screwdrivers 278

Reversible blade systems

Wiha reversible blade systems
Wiha SYSTEM 6 56
Wiha SYSTEM 4 63

Wiha ESD reversible blade systems
Wiha SYSTEM 6 ESD 272
Wiha SYSTEM 4 ESD 275

L-keys

Wiha ErgoStar holder 70
Wiha hex L-keys with MagicRing® 72
Wiha ProStar holder 73
Wiha system holder 74
Hex L-keys with MagicRing® 75
Wiha hex L-keys 77
Wiha PocketStar, Mini PocketStar 94, 98

Wiha MagicSpring® 86
Wiha TORX® MagicSpring® products 87
Wiha TORX® ball end L-keys 89
Wiha TORX® L-keys 91
Wiha TORX PLUS® L-keys 93

Wiha stainless steel L-keys 300

Wiha T-handles
Wiha ComfortGrip 99
Wiha T-handle 102
Wiha key and flag handles 107
Wiha key handle 108
Wiha flag handle 109
Wiha offset screwdrivers 109

Bits

Individual bits
Wiha DuraBit 112
Wiha Diamond bit 114
Wiha Torsions bit 116
Wiha Inkra bit 121
Wiha Standard bit 122
Wiha Xeno bit 127
Wiha threaded bit 132
Wiha special bits 133
Wiha drive system C 4 134
Wiha drive system C 8 $^{5}/_{16}$", G 7 136

Wiha stainless steel bits 298
Wiha CentroFix system 137
Wiha CentroFix 137
Wiha drill bits 138
Wiha nut driver product line 140
Wiha adapters 144
Wiha impact screwdriver assortment 145
Wiha Gripper 146
Bit holder
Wiha bit holder for power machines 148
Wiha bit holder with handle 150

Wiha magazine bit holder 151
Wiha magazine bit holder Stubby 153
Wiha ESD bit holder 281
Bit ranges
Wiha XLSelector 155
Wiha XSelector 156
Wiha XSelector stainless steel 299
Wiha Collector 162
Wiha bit case 164
Wiha bit bulk pack 164
Wiha SB bit programme 166

Pliers / Tweezers

Wiha Inomic®. Pliers. Reinvented.
Wiha Inomic® 178
Wiha Inomic® VDE 244

Wiha quality pliers
Wiha Professional 180
Wiha Professional electric 246
Wiha Industrial 185

Wiha Basic 189
Wiha Electronic 200
Wiha Professional ESD 282
Wiha quality tweezers 286

Soft-face hammers

Wiha Safety soft-face hammer 206

Wiha dead-blow hammer 212

Measuring tools

Wiha folding rulers 216
Longlife/ Longlife All in One/ Longlife Plus 217

Wiha callipers 218
digiMax, caliMax, dialMax, dialMax ESD 219

Wiha advertising articles 220

Articulated hoses

Wiha maxiflex® System 3200 222

Wiha maxiflex® System 3400 223

Wiha screwdrivers.

Wiha makes it possible: Optimum fitting for perfect work.

	Drive										
	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®	For internal hex screws	For hex nuts	For internal square screws	For internal triangular screws	Slotted nuts
SoftFinish® screwdrivers	11, 17–18	12–13, 17–18	12–13, 17–19	14, 19	14, 19	15	15	16, 18		16	17
Screw-holding screwdrivers	11	12									
SoftFinish® with mm scale	13	13	13								
SoftFinish® Stubby-screwdrivers	13	13	13								
MicroFinish screwdrivers	21, 23	21, 23	22–23	22				22			
Classic screwdrivers	25–26	25–26	25–26	25			26	26			
Small screwdrivers	28										
Wooden handle screwdrivers	33	33	33								
PicoFinish screwdrivers	35, 38	35, 38	35	36, 38–39		36	37, 39	37, 39			

Screwdrivers

The Wiha Finish screwdriver concept. The revolution in screwdriver design. ..... 8 – 9

Wiha SoftFinish®.
The specialist for dry and general applications. ..... 10 – 19

Wiha SoftFinish®.
Round blade with lasered millimetre scale. 13

Wiha SoftFinish® Stubby-screwdrivers.
For working in confined spaces. 13

Wiha MicroFinish.
The specialist for wet and oily applications. ..... 20 – 23

Wiha Classic.
The robust screwdriver for multiple applications. ..... 24 – 26

Wiha special tools.
Scrapers, trim pin remover, square reamers and awls. 27

Wiha small screwdrivers.
The pocket screwdrivers. 28

Wiha magnetisers/ demagnetisers.
For magnetising/ demagnetising. 29

Wiha universal scraper.
Easily removes sealing, paint and glue. ..... 30 – 31

Wiha wooden handle.
The all-rounder for woodworking applications. ..... 32 – 33

Wiha PicoFinish.
The comfortable precision screwdriver. ..... 34 – 39

Wiha VDE screwdrivers.
See VDE tool range, page 226 – 243

Wiha ESD screwdrivers.
See ESD tool range, page 263 – 281

Wiha stainless steel screwdrivers.
See stainless steel tool range, page 294 – 297

The Wiha Finish screwdriver concept.

The revolution in screwdriver design.

Wiha SoftFinish®

Wiha MicroFinish

Introducing the next generation of screwdrivers from Wiha: the SoftFinish® and the MicroFinish, because functionality and ergonomic styling together make up the most important aspect of a screwdriver.

The generation of Wiha Finish handles with its total of four handle sizes was developed on the basis of extensive studies into handle ergonomics with the support of high-profile research institutes. The result is a completely ergonomic design and optimal handle lengths and diameters. The user is guaranteed a perfect hold with every handle size.

The feel good factor
Due to the combination of material and handle size, each Finish screwdriver fits perfectly into the palm of the hand. There is no strain on muscles, ligaments and joints, with the result that minimum force is required for maximum torque.

SoftFinish® or MicroFinish
Screwdrivers used in dry working environments have to have a different handle surface to those used in oily working environments. Wiha has taken this on board and has developed a Finish screwdriver for dry and general applications and one for oily applications.

The handle core of both models consists of impact-resistant, recyclable special plastic material. The torque strengthening Finish zone of the SoftFinish® version is made of a soft, thermoplastic elastomer and is ideal for dry and general applications.

The Finish zone of the MicroFinish version is made of impact-resistant cellulose acetate that is also resistant to oil and chemicals. Its micro-fine surface structure ensures convincing high-torque transmission without slipping, even with oily hands.

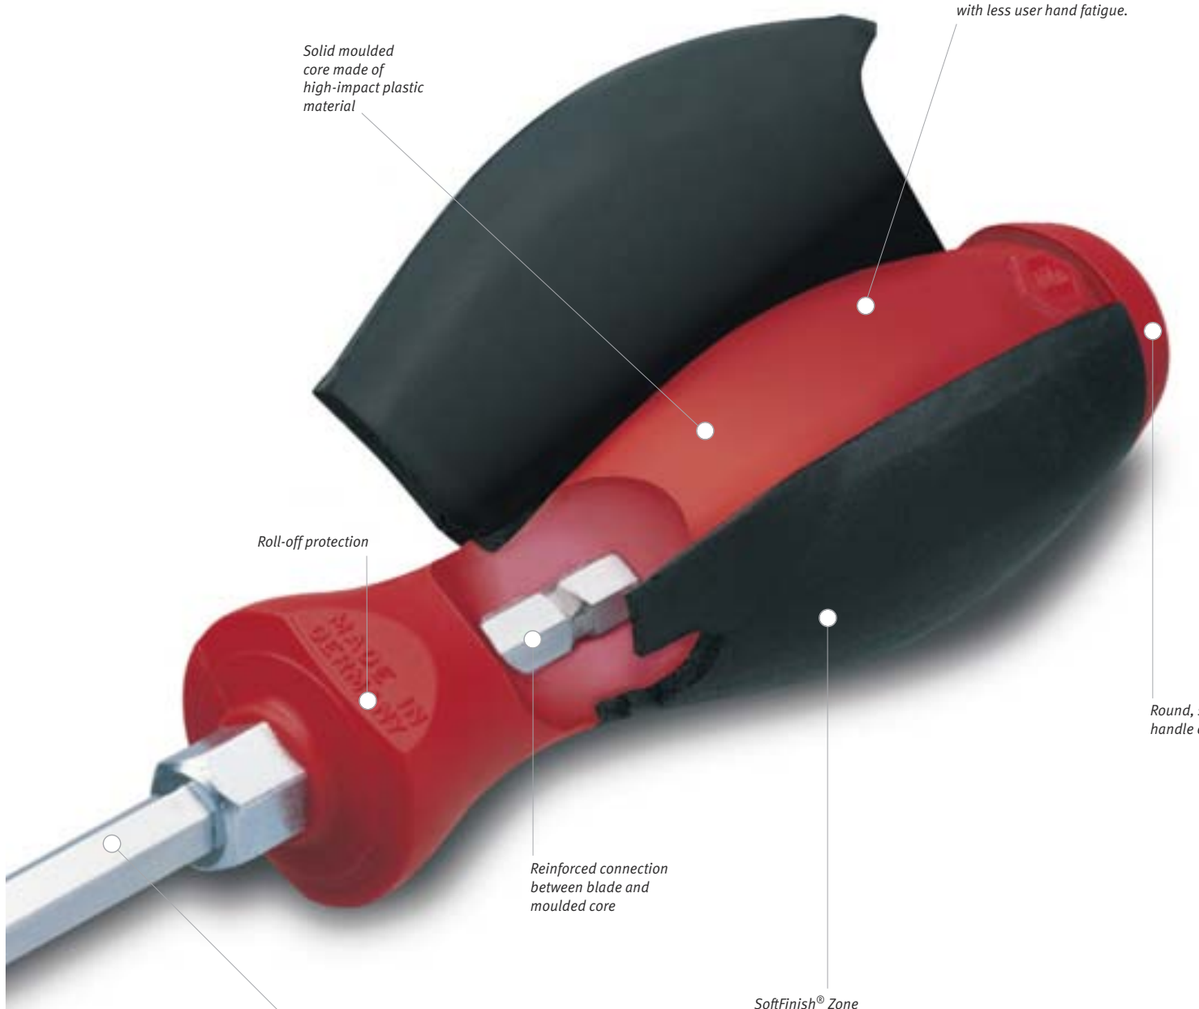

Wiha SoftFinish®.

The specialist for dry and general applications.

The right tool at a glance, thanks to the printed screw symbol on the handle end.

The Wiha SoftFinish® zone features a solid moulded core with soft outer grip. This requires less force, yet achieves 40% more torque than conventional handles. The handle is shaped to fit comfortably in the hand, providing maximum torque forces in dry and general working conditions.

If a stuck screw has to be loosened, a precise hammer blow can be applied to the solid steel cap. Due to the hex blade extending trough the handle to the steel cap, there is no loss of impact energy.

The solid steel cap at the end of the SoftFinish® handle enables controlled hammer blows, for example, when loosening a tight screw.

Due to the solid steel cap and hex blade extending through the handle, there is no loss of impact energy when a precise hammer blow is applied.

Thermoplastic elastomer tolerates high loads and feels soft and pleasant to the touch.

Blade with hex bolster for wrenches to use on particularly tight screws.

Wiha SoftFinish®.

- Multi-component SoftFinish® handle provides maximum user comfort
- Ergonomically perfect handle design
- Printed screw symbol on handle end for fast identification
- Available in versions with round blade, hex blade or hex blade with solid steel cap
- Blade made of high quality CVM-steel, through-hardened and chrome plated
- Wiha ChromTop®-finish on tip for a perfect fit every time

▶ *See VDE tools, page 228 – 237*

For slotted screws.



302 **SoftFinish® slotted cabinet screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 5265, DIN ISO 2380.
Application: Especially for dry and general applications.

Order-No.							
00684 6	2.0•	65	0.4	2.0	169	23	10
00685 3	2.5	75	0.4	2.5	179	23	10
00686 0	3.0•	80	0.5	3.0	184	23	10
00687 7	3.0	100	0.5	3.0	204	23	10
00689 1	3.0•	150	0.5	3.0	254	23	10
00690 7	3.0•	200	0.5	3.0	304	23	10
32383 7	3.0	300	0.5	3.0	404	23	5
00691 4	3.5	100	0.6	3.5	204	23	10
26931 9	3.5•	200	0.5	3.5	304	23	10
00692 1	4.0	100	0.8	4.0	211	30	10
00694 5	4.0•	150	0.8	4.0	261	30	10
00695 2	4.0•	200	0.8	4.0	311	30	10
00696 9	4.0•	300	0.8	4.0	411	30	5
27753 6	4.5•	80	0.8	4.5	191	30	10
00697 6	4.5•	125	0.8	4.5	236	30	10
00698 3	5.5	125	1.0	5.5	236	30	10
00700 3	5.5	150	1.0	5.5	261	30	10
00701 0	5.5•	200	1.0	5.5	311	30	10
00702 7	5.5•	300	1.0	5.5	411	30	5
32384 4	6.0	300	1.0	6.0	418	36	5

• Additional dimension. Non-DIN size.



302 **SoftFinish® slotted workshop screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 5265, DIN ISO 2380.
Application: Especially for dry and general applications.

Order-No.							
27754 3	6.0	100	1.0	5.5	218	36	10
27755 0	6.0	150	1.0	5.5	268	36	10
00704 1	6.5	100	1.2	6.0	218	36	10
00703 4	6.5	150	1.2	6.0	268	36	10
00706 5	6.5•	200	1.2	6.0	318	36	5
00708 9	8.0	150	1.2	7.0	274	41	10
00707 2	8.0	175	1.2	7.0	299	41	5
00709 6	8.0	175	1.6	7.0	299	41	5
32399 8	8.0	300	1.2	7.0	424	41	5
00711 9	10.0	200	1.6	8.0	324	41	5
32400 1	10.0	300	1.6	8.0	424	41	5
00712 6	12.0	250	2.0	8.0	374	41	5
00713 3	14.0	250	2.5	11.0	374	41	5

• Additional dimension. Non-DIN size.

For slotted screws.

308 **SoftFinish® slotted screwdriver.**
Hex blade with hex bolster.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 5265, DIN ISO 2380.
Application: Especially for dry and general applications.

Order-No.								
00731 7	3.5	75	0.6	4.0	-	186	30	10
00732 4	4.5•	90	0.8	4.0	-	201	30	10
00733 1	5.5	100	1.0	5.0	8	213	36	10
00734 8	6.5	125	1.2	6.0	10	238	36	10
00735 5	7.0•	125	1.1	6.0	10	238	36	10
00736 2	8.0	150	1.2	8.0	13	268	41	10
00737 9	9.0•	150	1.4	8.0	13	268	41	10
00738 6	10.0	175	1.6	8.0	13	293	41	5
00739 3	12.0	200	2.0	10.0	16	318	41	5
00740 9	14.0	250	2.5	10.0	16	368	41	5

• Additional dimension. Non-DIN size.



530 **SoftFinish® slotted screwdriver.**
Hex blade with hex bolster, solid steel cap.

Order-No.								
03223 4	3.5	75	0.6	4.0	-	186	30	10
03224 1	4.5•	90	0.8	4.0	-	201	30	10
03225 8	5.5	100	1.0	5.0	8	213	36	10
03226 5	6.5	125	1.2	6.0	10	238	36	10
03228 9	8.0	150	1.2	8.0	13	271	41	5
03230 2	10.0	175	1.6	8.0	13	296	41	5
03231 9	12.0	200	2.0	10.0	16	321	41	5
03232 6	14.0	250	2.5	10.0	16	371	41	5

• Additional dimension. Non-DIN size.

398 **SoftFinish® slotted screw-holding screwdriver.**
Clamping sleeve holds the screw.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For setting and turning screws in difficult to access areas.

Order-No.						
32867 2	2.5	75	0.4	186	30	5
32868 9	3.0	100	0.5	211	30	5
32869 6	4.0	125	0.8	243	36	5
32870 2	5.0	150	1.0	268	36	5
32871 9	6.0	175	1.2	293	36	5

Wiha SoftFinish®.

The specialist for dry and general applications.

▶ *See VDE tools, page 228 – 237*

For Phillips screws.

311 **SoftFinish® Phillips screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: ISO 8764.
Application: Especially for dry and general applications.

Order-No.						
00754 6	PH0	60	3.0	164	23	10
27756 7	PH0	100	3.0	204	23	10
00756 0	PH1	80	4.5	191	30	10
27757 4	PH1	100	4.5	211	30	10
00757 7	PH1•	200	4.5	311	30	10
03738 3	PH1•	300	4.5	411	30	5
00759 1	PH2	100	6.0	218	36	10
27758 1	PH2	150	6.0	268	36	10
00760 7	PH2•	200	6.0	318	36	5
03739 0	PH2•	300	6.0	418	36	5
00762 1	PH3	150	8.0	274	41	10
00763 8	PH4	200	10.0	324	41	5

• Additional dimension. Non-DIN size.

312 **SoftFinish® Phillips screwdriver.**
Hex blade with hex bolster.

Order-No.						
00764 5	PH1	80	5.0	8	186	30	10
00765 2	PH2	100	6.0	10	213	36	10
00766 9	PH3	150	8.0	13	268	41	10
00767 6	PH4	200	10.0	16	318	41	5

531 **SoftFinish® Phillips screwdriver.**
Hex blade with hex bolster, solid steel cap.

Order-No.						
03237 1	PH1	80	5.0	8	186	30	10
03238 8	PH2	100	6.0	10	213	36	10
03239 5	PH3	150	8.0	13	268	41	10

397 **SoftFinish® Phillips screw-holding screwdriver.**
Clamping sleeve holds the screw.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For setting and turning screws in difficult to access areas.

Order-No.					
32406 3	PH0	100	211	30	5
32404 9	PH1	125	236	36	5
32405 6	PH2	175	286	36	5

For Pozidriv screws.

313 **SoftFinish® Pozidriv screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: ISO 8764.
Application: Especially for dry and general applications.

Order-No.						
00768 3	PZ0	60	3.0	164	23	10
00770 6	PZ1	80	4.5	191	30	10
26454 3	PZ1	300	4.5	411	30	5
00772 0	PZ2	100	6.0	218	36	10
26455 0	PZ2	300	6.0	418	36	5
00774 4	PZ3	150	8.0	274	41	10

314 **SoftFinish® Pozidriv screwdriver.**
Hex blade with hex bolster.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: ISO 8764.
Application: Especially for dry and general applications.

Order-No.						
00776 8	PZ1	80	5.0	8	186	30	10
00777 5	PZ2	100	6.0	10	213	36	10
00778 2	PZ3	150	8.0	13	268	41	10
00779 9	PZ4	200	10.0	16	318	41	5

532 **SoftFinish® Pozidriv screwdriver.**
Hex blade with hex bolster, solid steel cap.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: ISO 8764.
Application: Especially for dry and general applications.

Order-No.						
03245 6	PZ1	80	5.0	8	186	30	10
03246 3	PZ2	100	6.0	10	213	36	10
03247 0	PZ3	150	8.0	13	271	41	10

Stubby-screwdriver.

302 **SoftFinish® slotted screwdriver.**
Short round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.
Standards: DIN 5265, DIN ISO 2380, handle acc. to DIN 5268 - style K.
Application: For working in confined spaces.

Order-No.							
26964 7	4.0	25	0.8	4.0	81	34	10
26965 4	5.5	25	1.0	5.5	81	34	10
26966 1	6.5	25	1.2	6.5	81	34	10
26967 8	8.0	25	1.2	8.0	81	34	10

311 **SoftFinish® Phillips screwdriver.**
Short round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.
Standards: ISO 8764, handle acc. to DIN 5268 - style K.
Application: For working in confined spaces.

Order-No.						
26968 5	PH1	25	4.5	81	34	10
26969 2	PH2	25	6.0	81	34	10
26970 8	PH3	25	8.0	81	34	10

313 **SoftFinish® Pozidriv screwdriver.**
Short round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.
Standards: ISO 8764, handle acc. to DIN 5268 - style K.
Application: For working in confined spaces.

Order-No.						
26971 5	PZ1	25	4.5	81	34	10
26972 2	PZ2	25	6.0	81	34	10
26973 9	PZ3	25	8.0	81	34	10

Screwdriver with mm scale.

NEW
3021 **SoftFinish® slotted screwdriver.**
Round blade with lasered millimetre scale from 30 to 110 mm.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 7437, DIN 5264, DIN ISO 2380.
Application: Especially for dry and general applications.
Extra: High-contrast millimetre scale permanently lasered on to the blade for depth, inner, outer and step measurements between 30 to 110 mm.

Order-No.							
35397 1	5.5	125	1.0	5.5	236	30	10

NEW
3111 **SoftFinish® Phillips screwdriver.**
Round blade with lasered millimetre scale from 20 to 90 mm.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 7437, DIN 5264, DIN ISO 2380.
Application: Especially for dry and general applications.
Extra: High-contrast millimetre scale permanently lasered on to the blade for depth, inner, outer and step measurements between 20 to 90 mm.

Order-No.						
35398 8	PH2	100	6.0	218	36	10

NEW
3131 **SoftFinish® Pozidriv screwdriver.**
Round blade with lasered millimetre scale from 20 to 90 mm.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 7437, DIN 5264, DIN ISO 2380.
Application: Especially for dry and general applications.
Extra: High-contrast millimetre scale permanently lasered on to the blade for depth, inner, outer and step measurements between 20 to 90 mm.

Order-No.						
35399 5	PZ2	100	6.0	218	36	10

Wiha SoftFinish®.

The specialist for dry and general applications.

▶ *See VDE tools, page 228 – 237*

For TORX® screws.

362 **SoftFinish® TORX® screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Especially for dry and general applications.

Order-No.						
26259 4	T3	60	2.5	164	23	10
26260 0	T4	60	2.5	164	23	10
01285 4	T5	60	2.5	164	23	10
01286 1	T6	60	3.5	164	23	10
01287 8	T7	60	3.5	164	23	10
01288 5	T8	60	3.5	164	23	10
01289 2	T9	60	4.0	171	30	10
01290 8	T10	80	4.0	191	30	10
01291 5	T15	80	4.0	191	30	10
01292 2	T20	100	4.0	218	36	10
01293 9	T25	100	4.5	218	36	10
01294 6	T27	115	5.5	233	36	10
01295 3	T30	115	6.0	233	36	10
01296 0	T40	130	7.0	254	41	10
01297 7	T45	130	8.0	254	41	5

For TORX® and TORX® tamper resistant screws.

362R **SoftFinish® TORX® MagicSpring® screwdriver.**
Retaining spring holds TORX® screws in place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For setting and tightening TORX® screws in difficult to access areas.

Order-No.						
27736 9	T6	60	3.5	164	23	10
27737 6	T7	60	3.5	164	23	10
27738 3	T8	60	3.5	164	23	10
27739 0	T9	60	4.0	171	30	10
27740 6	T10	80	4.0	191	30	10
27741 3	T15	80	4.0	191	30	10
27742 0	T20	100	4.0	218	36	10
27743 7	T25	100	4.5	218	36	10
27811 3	T27	115	5.5	233	36	10
27744 4	T30	115	6.0	233	36	10
27745 1	T40	130	7.0	254	41	10



362BE **SoftFinish® TORX® ball end screwdriver.**
Hex blade.

Blade: High-quality chrome-molybdenum steel, through-hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For all hard-to-reach TORX® screws.
Extra: The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.						
32250 2	T9	60	7/64	2.8	164	23	10
32251 9	T10	60	1/8	3.2	184	23	10
32252 6	T15	80	9/64	3.6	191	30	10
32253 3	T20	80	5/32	4.0	211	30	10
32254 0	T25	100	3/16	4.8	218	36	10
32255 7	T27	115	7/32	5.6	233	36	10
32256 4	T30	115	1/4	6.4	233	36	10

362TR **SoftFinish® TORX® Tamper Resistant screwdriver.**
With borehole in the blade tip.
For TORX® screws with locking pin.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
With borehole in the blade tip.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Order-No.						
03106 0	T7H	60	3.5	164	23	10
03107 7	T8H	60	3.5	164	23	10
03108 4	T9H	60	4.0	171	30	10
26456 7	T9H	300	4.0	411	30	5
01300 4	T10H	80	4.0	191	30	10
26457 4	T10H	300	4.0	411	30	5
01301 1	T15H	80	4.0	191	30	10
26458 1	T15H	300	4.0	411	30	5
01302 8	T20H	100	4.0	211	30	10
28005 5	T20H	300	4.0	411	30	5
01303 5	T25H	100	4.5	211	30	10
01304 2	T27H	115	5.5	233	36	10
01305 9	T30H	115	6.0	233	36	10
01306 6	T40H	130	7.0	254	41	10

For TORX PLUS® and Allen screws.

362IP **SoftFinish® TORX PLUS® screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Order-No.						
26091 0	6IP	60	3.5	164	23	10
26093 4	7IP	60	3.5	164	23	10
26095 8	8IP	60	3.5	164	23	10
26097 2	9IP	60	4.0	171	30	10
26099 6	10IP	80	4.0	191	30	10
26101 6	15IP	80	4.0	191	30	10
26103 0	20IP	100	4.0	218	36	10
26105 4	25IP	100	4.5	218	36	10
26107 8	27IP	115	5.5	233	36	10
26109 2	30IP	115	6.0	233	36	10
26111 5	40IP	130	7.0	254	41	10

362RIP **SoftFinish® TORX PLUS® MagicSpring® screwdriver.**
Retaining spring holds TORX PLUS® screws in place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For setting and tightening TORX PLUS® screws in hard to reach areas.

Order-No.						
28760 3	6IP	60	3.5	164	23	10
28761 0	7IP	60	3.5	164	23	10
28762 7	8IP	60	3.5	164	23	10
28763 4	9IP	60	4.0	171	30	10
28764 1	10IP	80	4.0	191	30	10
28765 8	15IP	80	4.0	191	30	10
28766 5	20IP	100	4.0	218	36	10
28767 2	25IP	100	4.5	218	36	10
28768 9	27IP	115	5.5	233	36	10
28769 6	30IP	115	6.0	233	36	10
28770 2	40IP	130	7.0	254	41	10

356 **SoftFinish® hex screwdriver.**
Hex blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Order-No.						
32264 9	1.5	60	164	23	10
32265 6	2.0	60	164	23	10
26190 0	2.5	75	179	23	10
26191 7	3	75	179	23	10
26192 4	4	75	186	30	10
26193 1	5	75	186	30	10
26194 8	6	100	218	36	10
26195 5	8	100	218	36	10

For hex socket screws.



367 **SoftFinish® ball end hex screwdriver.**
Hex blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For all screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.					
26303 4	1.5	75	179	23	10
26304 1	2	100	204	23	10
26305 8	2.5	100	204	23	10
26328 7	3	100	204	23	10
26329 4	4	100	211	30	10
26330 0	5	100	211	30	10
26331 7	6	125	243	36	10
26332 4	8	150	268	36	10
26333 1	10	150	271	41	5
26307 2	12	150	271	41	5

367R **SoftFinish® MagicRing® ball end hex screwdriver.**
Ring made of spring steel holds hex screws in place.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For setting and turning screws in difficult to access areas.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.					
26077 4	3	100	204	23	10
26079 8	4	100	211	30	10
26081 1	5	100	211	30	10
26083 5	6	125	243	36	10
26085 9	8	150	268	36	10
26087 3	10	150	271	41	5

357 **SoftFinish® offset hex screwdriver.**
Hex blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Ideal for high-torque applications, e.g. in workshops.

Order-No.						
26230 3	3	35	20	139	23	10
26231 0	4	40	25	151	30	10
26232 7	5	45	28	156	30	10
26233 4	6	50	32	168	36	10
26234 1	8	60	36	178	36	10
26235 8	10	70	40	199	41	10

Wiha SoftFinish®.

The specialist for dry and general applications.

▶ *See VDE tools, page 228 – 237*

For hex nuts.

341 **SoftFinish® hex nut driver.**
Round blade.
Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Deep drawn socket.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 3125.
Application: Especially for dry and general applications.

Order-No.						
01018 8	4	125	236	30	6.9	10
01020 1	5	125	236	30	7.9	10
01021 8	5.5	125	236	30	7.9	10
01022 5	6	125	236	30	8.9	10
01023 2	7	125	243	36	10.9	10
01024 9	8	125	243	36	11.9	10
01025 6	9	125	243	36	12.9	10
01026 3	10	125	243	36	14.4	10
01027 0	11	125	249	41	15.9	5
01028 7	12	125	249	41	16.9	5
01029 4	13	125	249	41	18.4	5
01030 0	14	125	249	41	19.4	5
01031 7	15	125	249	41	21.9	5
01032 4	16	125	249	41	21.9	5
01033 1	17	125	249	41	23.4	5

347 **SoftFinish® hex nut driver.**
Round blade with hex bolster.
Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Deep drawn socket.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 3125.
Application: Especially for dry and general applications.

Order-No.							
01092 8	7	125	10	238	36	11.0	10
01093 5	8	125	10	238	36	12.0	10
01094 2	9	125	10	238	36	13.0	10
01095 9	10	125	10	238	36	14.5	10
01096 6	11	125	13	246	41	16.0	5
01097 3	12	125	13	246	41	17.0	5
01098 0	13	125	13	246	41	19.0	5

347 Zoll **SoftFinish® hex nut driver. Inch sizes.**
Round blade with hex bolster.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Deep drawn socket.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Especially for dry and general applications.

Order-No.						mm		
02836 7	3/16	125	10	231	30	4.76	8	10
02837 4	1/4	125	10	238	36	6.35	10	10
02838 1	5/16	125	10	238	36	7.94	12	10
02839 8	3/8	125	10	238	36	9.53	14	10
02840 4	7/16	125	13	246	41	11.11	16	10
02841 1	1/2	125	13	246	41	12.70	19	10

For hex and triangular nuts.

343 **SoftFinish® hex nut driver.**
Short round blade.
Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Deep drawn socket.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For working in confined spaces.

Order-No.						
01076 8	5.5	65	176	30	8	10
01077 5	6	65	176	30	9	10
01078 2	7	65	183	36	11	10
01079 9	8	65	183	36	12	10
01081 2	10	65	183	36	14	10

372 **SoftFinish® hex nut driver.**
Flexible shaft for hard to reach areas.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: E.g. for tightening and loosening adjustable hose clamps.

Order-No.						
01435 3	5	150	261	30	8	10
01436 0	5.5	150	261	30	8	10
01437 7	6	150	261	30	9	10
01438 4	7	150	268	36	11	10
01439 1	8	150	268	36	12	10
01440 7	10	175	293	41	14	10
01443 8	13	175	293	41	19	5

344 **SoftFinish® triangular nut driver.**
Round blade.
Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 22416.
Application: For triangular screws DIN 22424 and triangular nuts DIN 22425.

Order-No.							
26212 9	M4	125	6.8	236	30	11	10
26213 6	M5	125	8.3	236	30	13	10
26216 7	M6	125	10.05	236	30	16	10
26214 3	M8	125	12.05	243	36	18	10
26217 4	M10	125	15.05	243	36	22	10
26218 1	M12	125	16.55	249	41	24	10

For slotted nuts. Sets with round blades.

305 **SoftFinish® slotted nut driver.**
Round blade.
Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 3125.
Application: For nuts DIN 546.

Order-No.							
32364 6	M1.7	80	0.5	4.0	184	23	5
32363 9	M2	80	1.0	4.5	184	23	5
32362 2	M2.3	90	1.0	5.0	201	30	5
32361 5	M2.6	90	1.2	5.5	201	30	5
32360 8	M3	100	1.2	6.0	211	30	5
32358 5	M3.5	100	1.4	7.0	218	36	5
32359 2	M4	100	1.4	8.0	218	36	5
32357 8	M5	125	2.0	10.0	243	36	5
32356 1	M6	125	2.5	11.0	243	36	5
32355 4	M8	150	3.0	14.0	274	41	5
32354 7	M10	150	3.5	18.0	274	41	5

302 HK6 SO **SoftFinish® slotted/ Phillips screwdriver set, 6 pcs.**
Round blades.
Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Especially for dry and general applications.

Order-No.	Series				
07152 3	302 HK6 SO				1
	302	3.5x100	4.5x125	5.5x150	6.5x150
	311	PH1x80	PH2x100		

302 ZK6 SO **SoftFinish® slotted/ Pozidriv screwdriver set, 6 pcs.**
Round blades.

Order-No.	Series				
07153 0	302 ZK6 SO				1
	302	3.5x100	4.5x125	5.5x150	6.5x150
	313	PZ1x80	PZ2x100		

Sets with round blades.

311 K6 **SoftFinish® Phillips/ Pozidriv screwdriver set, 6 pcs.**
Round blades.
Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Especially for dry and general applications.

Order-No.	Series			
26146 7	311 K6			1
	311	PH1x80	PH2x100	PH3x150
	313	PZ1x80	PZ2x100	PZ3x150

302 HK6 01 **SoftFinish® slotted/Phillips/ Pozidriv screwdriver set, 6 pcs.**
Round blades.

Order-No.	Series			
26113 9	302 HK6 01			1
	302	4.0x100	5.5x125	6.5x150
	311	PH1x80	PH2x100	
	313	PZ2x100		

Wiha SoftFinish®.

The specialist for dry and general applications.

▶ *See VDE tools, page 228 – 237*

Sets with hex blades.

308 HK6 **SoftFinish® slotted/ Phillips screwdriver set, 6 pcs.**
Hex blades with hex bolster.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Especially for dry and general applications.

Order-No.	Series					
21248 3	308 HK6					1
	308	3.5x75	4.5x90	5.5x100	7.0x125	
	312	PH1x80	PH2x100			

308 ZK6 **SoftFinish® slotted/ Pozidriv screwdriver set, 6 pcs.**
Hex blades with hex bolster.

Order-No.	Series					
21249 0	308 ZK6					1
	308	3.5x75	4.5x90	5.5x100	7.0x125	
	314	PZ1x80	PZ2x100			

Sets with steel caps. Nut driver set.

530 HK6 **SoftFinish® slotted/ Phillips screwdriver set, 6 pcs.**
Hex blades with hex bolster, solid steel cap.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Especially for dry and general applications.

Order-No.	Series					
21250 6	530 HK6					1
	530	3.5x75	4.5x90	5.5x100	6.5x125	
	531	PH1x80	PH2x100			

530 ZK6 **SoftFinish® slotted/ Pozidriv screwdriver set, 6 pcs.**
Hex blades with hex bolster, solid steel cap.

Order-No.	Series					
21251 3	530 ZK6					1
	530	3.5x75	4.5x90	5.5x100	6.5x125	
	532	PZ1x80	PZ2x100			

341 K5 **SoftFinish® hex nut driver set, 5 pcs.**
Round blades.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Deep drawn socket.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Especially for dry and general applications.

Order-No.	Series				
01034 8	341 K5				1
	341	5.5x125	7x125	8x125	
		10x125	13x125		

TORX® sets.

362 K6 SO **SoftFinish® TORX® screwdriver set, 6 pcs.**
Round blades.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Especially for dry and general applications.

Order-No.	Series					
07155 4	362 K6 SO					1
	362	T10x80	T15x80	T20x100		
		T25x100	T30x115	T40x130		

362 K7 **SoftFinish® TORX® screwdriver set, 7 pcs.**
Round blades.

Order-No.	Series					
01299 1	362 K7					1
	362	T8x60	T9x60	T10x80	T15x80	
		T20x100	T25x100	T30x115		

362BE K6 **SoftFinish® TORX® ball end screwdriver set, 6 pcs.**
Hex blade.

Blade: High-quality chrome-molybdenum steel, through-hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For all hard-to-reach TORX® screws.
Extra: The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.	Series				
32249 6	362BE K6				1
	362BE	T9x60	T10x60	T15x80	
		T20x80	T25x100	T30x115	

Sets.

362R K6 SO **SoftFinish® TORX® MagicSpring® screwdriver set, 6 pcs.**
Retaining spring holds TORX® screws in place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: For setting and tightening TORX® screws in difficult to access areas.

Order-No.	Series					
27746 8	362R K6 SO					1
	362R	T10x80	T15x80	T20x100		
		T25x100	T30x115	T40x130		

362 K6 01 **SoftFinish® Pozidriv/ TORX® screwdriver set, 6 pcs.**
Round blades.

Order-No.	Series					
26114 6	362 K6 01					1
	313	PZ1x80	PZ2x100			
	362	T10x80	T15x80	T20x100	T25x100	

362TR K6 **SoftFinish® TORX® Tamper Resistant screwdriver set, 6 pcs.**
For TORX® screws with locking pin.

Order-No.	Series				
24506 1	362TR K6				1
	362TR	T10Hx80	T15Hx80	T20Hx100	
		T25Hx100	T30Hx115	T40Hx130	

Wiha MicroFinish.

The specialist for wet and oily applications.

The non-slip handle is made from cellulose acetate and has a micro-fine surface structure. This gives maximum torque transmission and perfect handling in wet and oily work surroundings.

Optimum power transfer, even with very oily hands!

Wiha MicroFinish screwdrivers stand for contemporary handle design, together with the ideal combination of materials for wet and oily applications.

The micro-fine surface of the finish zone made of sandblasted cellulose-acetate ensures maximum power transfer and provides an effective non-slip grip, even with very oily hands. The roll-off protection in the front area of the handle prevents the tool from rolling off the workbench. The screwdriver is also available with a solid steel cap for loosening tight screws with a single hammer blow. As the steel cap is connected to the blade, the entire energy from the impact is transmitted to the screw head without damaging either the handle or the blade.

The MicroFinish hex blades with ChromTop® tip are made of high-quality chrome-vanadium-molybdenum steel, are through-hardened and chrome-plated. This guarantees a particularly long tool life.

Wiha's MicroFinish screwdrivers are ideal for automotive applications, for use on building sites or when working with sanitary installations. However, they can also be used to perform repairs to machinery and equipment where oil and lubricants pose potential problems.

The hex blade and hex bolster model with solid steel cap is ideal for loosening tight screws.

Wiha MicroFinish.

- Micro-fine handle surface for a non-slip grip in an oily working environment
- Ergonomic handle shape fits every hand
- Blades made of high-quality chrome-vanadium-steel, through-hardened and chromeplated for a long tool life
- Wiha ChromTop® blade tip sits securely in the screw head and offers great dimensional accuracy

For slotted screws.

5520 **MicroFinish slotted screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Standards: DIN 5265, DIN ISO 2380.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.							
29115 0	**3.5**	**100**	0.6	3.5	204	23	10
29116 7	**4.0**	**100**	0.8	4.0	211	30	10
29117 4	**4.0•**	**150**	0.8	4.0	261	30	10
29118 1	**5.5**	**125**	1.0	5.5	236	30	10
29119 8	**5.5**	**150**	1.0	5.5	261	30	10
29120 4	**6.5**	**150**	1.2	6.0	268	36	10
29121 1	**8.0**	**150**	1.2	7.0	274	41	10
29122 8	**8.0**	**175**	1.2	7.0	299	41	10
29123 5	**10.0**	**200**	1.6	8.0	324	41	5

• Additional dimension. Non-DIN size.

5533 **MicroFinish slotted screwdriver.**
Hex blade with hex bolster, solid steel cap.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Standards: DIN 5265, DIN ISO 2380.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.								
29133 4	**4.5•**	**90**	0.8	4.0	-	201	30	10
29134 1	**5.5**	**100**	1.0	5.0	8	213	36	10
29135 8	**6.5**	**125**	1.2	6.0	10	238	36	10
29136 5	**8.0**	**150**	1.2	8.0	13	271	41	5
29137 2	**10.0**	**175**	1.6	8.0	13	296	41	5

• Additional dimension. Non-DIN size.

For Phillips screws.

5521 **MicroFinish Phillips screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Standards: ISO 8764.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.						
29140 2	**PH0**	**60**	3.0	165	23	10
29141 9	**PH1**	**80**	4.5	192	30	10
29142 6	**PH1•**	**200**	4.5	312	30	5
29143 3	**PH2**	**100**	6.0	220	36	10
29144 0	**PH2•**	**200**	6.0	320	36	5
29145 7	**PH3**	**150**	8.0	277	41	10

• Additional dimension. Non-DIN size.

5534 **MicroFinish Phillips screwdriver.**
Hex blade with hex bolster, solid steel cap.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Standards: ISO 8764.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.							
29149 5	**PH1**	**80**	5.0	8	187	30	10
29150 1	**PH2**	**100**	6.0	10	214	36	10
29151 8	**PH3**	**150**	8.0	13	271	41	10

Wiha Info

Wiha MicroFinish.

Due to the sandblasted surface, oil and moisture flow away from the handle surface for a powerful, non-slip grip – a maximum force and comfort with dry, oily or wet hands is ensured.
The ergonomic handle shape ensures also exceptional torque transfer.

Wiha MicroFinish.

The specialist for wet and oily applications.

For Pozidriv and TORX® screws.

5522 **MicroFinish Pozidriv screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Standards: ISO 8764.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.						
29152 5	**PZ1**	**80**	4.5	192	30	10
29153 2	**PZ2**	**100**	6.0	220	36	10
29154 9	**PZ3**	**150**	8.0	277	41	10

5535 **MicroFinish Pozidriv screwdriver.**
Hex blade with hex bolster, solid steel cap.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Standards: ISO 8764.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.							
29158 7	**PZ1**	**80**	5.0	8	187	30	10
29159 4	**PZ2**	**100**	6.0	10	214	36	10
29160 0	**PZ3**	**150**	8.0	13	271	41	5

5527 **MicroFinish TORX® screwdriver.**
Round blade.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.						
29161 7	**T9**	**60**	4.0	172	30	10
29162 4	**T10**	**80**	4.0	192	30	10
29163 1	**T15**	**80**	4.0	192	30	10
29164 8	**T20**	**100**	4.0	212	30	10
29165 5	**T25**	**100**	4.5	212	30	10
29166 2	**T27**	**115**	5.5	235	36	10
29167 9	**T30**	**115**	6.0	235	36	10
29168 6	**T40**	**130**	7.0	257	41	5

For hex nuts.

5525 **MicroFinish hex nut driver.**
Round blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Deep drawn socket.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Standards: DIN 3125.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.						
29170 9	**5.5**	**125**	237	30	7.9	10
29171 6	**6**	**125**	237	30	8.9	10
29172 3	**7**	**125**	245	36	10.9	10
29173 0	**8**	**125**	245	36	11.9	10
29174 7	**10**	**125**	245	36	14.4	10

5528 **MicroFinish hex nut driver.**
Flexible shaft for hard to reach areas.

Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Application: E.g. for tightening and loosening adjustable hose clamps.

Order-No.						
29175 4	**6**	**150**	262	30	9	10
29176 1	**7**	**150**	270	36	11	10
29177 8	**8**	**150**	270	36	12	10

TORX® set.

5527 K6 **MicroFinish TORX® screwdriver set, 6 pcs.**
Round blades.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.	Series				
29169 3	**5527 K6**				1
	5527	T10x80	T15x80	T20x100	
		T25x100	T30x115	T40x130	

Sets with round blades.

5520 HK6 **MicroFinish slotted/ Phillips screwdriver set, 6 pcs.**
Round blades.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.	Series					
29124 2	**5520 HK6**					1
	5520	3.5x100	4.0x100	5.5x125	6.5x150	
	5521	PH1x80	PH2x100			

Sets with steel caps.

5533 HK5 **MicroFinish slotted/ Phillips screwdriver set, 5 pcs.**
Hex blades with hex bolster, solid steel cap.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.	Series					
29138 9	**5533 HK5**					1
	5533	5.5x100	6.5x125	8.0x150		
	5534	PH1x80	PH2x100			

5520 ZK6 **MicroFinish slotted/ Pozidriv screwdriver set, 6 pcs.**
Round blades.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.	Series					
29125 9	**5520 ZK6**					1
	5520	3.5x100	4.0x100	5.5x125	6.5x150	
	5522	PZ1x80	PZ2x100			

5533 ZK5 **MicroFinish slotted/ Pozidriv screwdriver set, 5 pcs.**
Hex blades with hex bolster, solid steel cap.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Non-slip Wiha MicroFinish handle with roll-off protection.
Application: Best suited for turning screws in wet and oily conditions.

Order-No.	Series					
29139 6	**5533 ZK5**					1
	5533	5.5x100	6.5x125	8.0x150		
	5535	PZ1x80	PZ2x100			

Wiha Classic.

The robust screwdriver for multiple applications.

Wiha Square handle, impact-resistant and cadmium-free – also withstands a few hammer strokes.

Day after day, the Wiha Square Grip screwdriver proves to be a universal classic for a wide variety of different applications. Its robust handle is manufactured from high quality plastic and is impact resistant, non-splintering and recyclable.

Users appreciate its versatility and high quality, which is also conveyed by the hardened chrome-vanadium-molybdenum steel blade.

Wiha Square Grip – the tough and versatile classic.

The slim square handle even fits into the smallest pocket.

Wiha Classic.

- Universal use, and successful for many years
- Robust, large-surface handle made of impact-resistant plastic material, chemical and oil-resistant
- Smooth handle surface allows easy cleaning
- Wiha ChromTop®-finish on tip for a perfect fit every time
- Takes up a small amount of space in the toolbox

▶ *See VDE tools, page 238*

For slotted screws.

186 **Classic slotted screwdriver. Round blade.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated. Tip and blade width identical up to size 6.0.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Application: For universal use in trade and industry.
Extra: Series includes extra long dimensions for screws that are difficult to access.

Order-No.							
00201 5	2.0	40	0.4	2.0	100	14	10
00202 2	2.0	60	0.4	2.0	120	14	10
00203 9	2.5	50	0.4	2.5	110	14	10
00204 6	2.5	75	0.4	2.5	150	19	10
00206 0	3.0	75	0.5	3.0	150	19	10
00207 7	3.0	100	0.5	3.0	175	19	10
00208 4	3.0	150	0.5	3.0	225	19	10
00209 1	3.0	200	0.5	3.0	285	22	10
00210 7	3.0	300	0.5	3.0	385	22	5
00211 4	3.5	100	0.6	3.5	175	19	10
00212 1	4.0	100	0.8	4.0	185	22	10
00213 8	4.0	150	0.8	4.0	235	22	10
00214 5	4.0	200	0.8	4.0	285	22	10
00215 2	4.0	300	0.8	4.0	385	22	5
00218 3	5.0	100	0.9	5.0	195	24	10
00219 0	5.0	150	0.9	5.0	245	24	10
00220 6	5.0	200	0.9	5.0	295	24	10
00221 3	5.0	300	0.9	5.0	395	24	5
00222 0	5.5	100	1.0	5.5	195	24	10
00223 7	5.5	150	1.0	5.5	245	24	10
00226 8	6.0	100	1.1	6.0	205	28	10
00227 5	6.0	150	1.1	6.0	255	28	10
00229 9	6.0	300	1.1	6.0	405	28	5
00230 5	7.0	150	1.2	6.0	255	28	10
00231 2	8.0	150	1.2	7.0	265	32	10
00234 3	8.0	300	1.2	7.0	415	32	5
00235 0	10.0	200	1.6	8.0	315	32	5
00236 7	10.0	300	1.6	8.0	415	32	5
00237 4	10.0	500	1.6	8.0	615	32	5

148 **Classic slotted screwdriver. Round blade.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated. Anti-Cam-Out ribs on tips from size 5.5.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Application: For universal use in trade and industry.

Order-No.							
00097 4	2.5	75	0.4	3.5	150	19	10
00098 1	3.5	90	0.5	4.0	175	22	10
00099 8	4.5	100	0.7	5.0	195	24	10
00100 1	5.5	120	0.95	6.0	225	28	10
00101 8	7.0	140	1.05	7.0	225	32	10
00102 5	9.0	160	1.2	8.0	275	32	10
00103 2	10.0	180	1.4	8.0	305	36	10

For Phillips, Pozidriv and TORX® screws.

153 **Classic Phillips screwdriver. Round blade.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Standards: ISO 8764.
Application: For universal use in trade and industry.

Order-No.						
00109 4	PH0	60	3.0	135	19	10
00111 7	PH1	80	4.5	175	24	10
00112 4	PH1•	200	4.5	295	24	10
00115 5	PH2	100	6.0	205	28	10
00116 2	PH2•	250	6.0	355	28	10
00117 9	PH2•	350	6.0	455	28	5
00119 3	PH3	150	8.0	265	32	10
00120 9	PH3•	300	8.0	415	32	5

• Additional dimension. Non-DIN size.

222 **Classic Pozidriv screwdriver. Round blade.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Standards: ISO 8764.
Application: For universal use in trade and industry.

Order-No.						
00416 3	PZ0	60	3.0	135	19	10
00418 7	PZ1	80	4.5	175	24	10
00422 4	PZ2	100	6.0	205	28	10
00423 1	PZ2•	250	6.0	355	28	5
00426 2	PZ3	150	8.0	265	32	10

• Additional dimension. Non-DIN size.

360 **Classic TORX® screwdriver. Round blade.**

Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Application: For universal use in trade and industry.

Order-No.						
05280 5	T5	50	2.5	110	14	10
01264 9	T6	50	3.5	125	19	10
01266 3	T8	60	3.5	135	19	10
01267 0	T9	60	4.0	145	22	10
01268 7	T10	80	4.0	175	24	10
01269 4	T15	80	4.0	175	24	10
01270 0	T20	100	4.0	205	28	10
01271 7	T25	100	4.5	205	28	10

Wiha Classic.

The robust screwdriver for multiple applications.

▶ *See VDE tools, page 238*

For hex nuts and hex socket screws.

353 **Classic hex screwdriver.**
Hex blade.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Application: For universal use in trade and industry.

Order-No.					
01224 3	**1.5**	**60**	120	14	10
01225 0	**2**	**60**	120	14	10
01226 7	**2.5**	**75**	150	19	10
01227 4	**3**	**75**	150	19	10
01228 1	**4**	**75**	160	22	10
01229 8	**5**	**75**	170	24	10

342 **Classic hex nut driver.**
Round blade.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Deep drawn socket.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Standards: DIN 3125.
Application: For universal use in trade and industry.

Order-No.						
01051 5	**3**	**125**	220	24	5.0	10
01053 9	**3.5**	**125**	220	24	6.4	10
01054 6	**4**	**125**	220	24	6.9	10
01055 3	**4.5**	**125**	220	24	6.9	10
01056 0	**5**	**125**	220	24	7.9	10
01057 7	**5.5**	**125**	220	24	7.9	10
01058 4	**6**	**125**	220	24	8.9	10
01059 1	**7**	**125**	230	28	10.9	10
01060 7	**8**	**125**	230	28	11.9	10
01061 4	**9**	**125**	230	28	12.9	10
01062 1	**10**	**125**	230	28	14.4	10
01063 8	**11**	**125**	240	32	15.9	10
01064 5	**12**	**125**	240	32	16.9	10
01065 2	**13**	**125**	240	32	18.4	10

Slotted/ Phillips and slotted/ Pozidriv sets.

148 HK5 **Classic slotted/ Phillips screwdriver set, 5 pcs.**
Round blades.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Anti-Cam-Out ribs on tip sizes 5.5 / 7.0.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Application: For universal use in trade and industry.

Order-No.	Series			
00105 6	**148 HK5**			1
	148	4.5x100	5.5x120	7.0x140
	153	PH1x80	PH2x100	

148 ZK5 **Classic slotted/ Pozidriv screwdriver set, 5 pcs.**
Round blades.

Order-No.	Series			
00108 7	**148 ZK5**			1
	148	4.5x100	5.5x120	7.0x140
	222	PZ1x80	PZ2x100	

Wiha scrapers, trim pin remover, square reamers and awls.

Scraper, trim pin remover.

K 430 20 **Seal scraper.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha Power handle, impact, oil and grease resistant.
Application: For easy removing of sealing materials, e.g. in automotive applications.

Order-No.					
01532 9	**25**	**150**	260	36	10

K 430 10 **Trim pin remover.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha Power handle, impact, oil and grease resistant.
Application: For fast removal of trim pins, e.g. on internal car panels.

Order-No.					
01531 2	**7.5**	**175**	285	36	10

Square reamer, awl.

300-2 **Reamer with plastic handle and round blade.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Made of cellulose acetate, transparent red.
Application: For enlarging holes and drill holes.

Order-No.					
00679 2	**6.0**	**100**	185	34	10

301-2 **Awl with plastic handle and round blade.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Made of cellulose acetate, transparent red.
Application: For pre-punching holes and drill holes.

Order-No.					
00683 9	**6.0**	**100**	185	34	10

Wiha Info

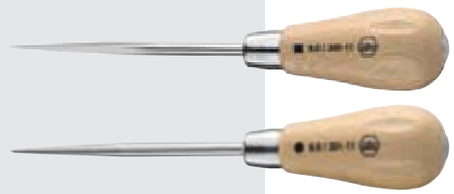

Reamers and awls are also available with wood handles, see page 33.

Wiha pocket screwdrivers and screw-holding screwdrivers.

For slotted and Phillips screws.

500 **Slotted pocket screwdriver.**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha round handle, transparent red with pen clip.

Order-No.						
01537 4	**3.0**	**40**	3.0	100	11	50
01538 1	**3.0**	**60**	3.0	120	11	50
01539 8	**3.0**	**80**	3.0	140	11	50

509 **Slotted pocket screwdriver.**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha round handle, transparent yellow.

Order-No.						
01548 0	**2.0**	**40**	2.0	85	8	50

198-1 **Classic reversible slotted/ Phillips screwdriver.**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha round handle, oil and grease resistant.

Order-No.							
00328 9	**6.0**	**PH2**	6	160	90	22	10

Screw extractor set.

405 11 **Screw extractor set with spiral drill bit, 16 pcs.**
Material: Screw extractor of chrome-vanadium-molybdenum steel, HSS spiral drill bit, bronzed.
Application: Used for lifting of damaged or broken screws, especially for obsolete hex screws (Allen).

Order-No.	Series					
03988 2	**405 11**					1
	405	2.0x85	2.5x85	3.0x85	4.0x85	
		5.0x85	6.0x95	8.0x95	10.0x110	
		2.3x53	2.8x51	3.4x70	4.5x80	
		5.7x93	6.8x109	9.0x117	11.0x142	

Wiha Info

Screw extractor

Damaged or rounded **allen screws** or…

... broken off **screw heads**

Pre-drill with spiral drill bit



Firmly hammer in the screw extractor with a hammer

Slide in the box spanner to the bottom and screw out without tilting

Wiha magnetisers/ demagnetisers.

Magnetisers/demagnetisers.

400 10 **Magnetiser/ demagnetiser.**
Size: 52 x 50 x 29 mm (b x h x d)
Application: For magnetising/ demagnetising screwdriver blades and similar tools made of steel.

Order-No.	
01508 4	5

SB 400 10 **Magnetiser/ demagnetiser, blister packed.**
Size: 52 x 50 x 29 mm (b x h x d)
Application: For magnetising/ demagnetising screwdriver blades and similar tools made of steel.

Order-No.	
02568 7	5

Magnetisers/demagnetisers.

Good value for money

400 12 **Magnetisers/ demagnetisers, 12 pcs.**
In display box for trade sales.

Order-No.	
24492 7	1

Wiha universal scraper.

Easily removes sealing, paint and glue.

The razor sharp blade quickly removes sealing, paint and glue.

The Wiha universal scraper is the optimal tool to quickly and easily remove seals, paint, glue and labels from glass and metallic surfaces.

The universal scraper is a robust tool with an ergonomic SoftFinish® multi-component handle. Due to the special handle shape ultimate user comfort is provided. The high quality blades have a very long life. If a blade change is necessary, it can be done quickly and easily using the unique blade changing device.

The Wiha universal scraper is a tool which should be present in every professional toolbox. It also makes life easier for every home worker.

The Wiha universal scraper can be used for the easy removal of gasket remains.

Wiha universal scraper.

- Removes quickly seals, paint, glue and labels
- High-quality blades have a very long life
- Square blade geometry, ideal for corners and edges
- Unique blade changing device ensures easy blade change
- Ergonomically shaped SoftFinish® multi-component handle for maximum user comfort

Universal scraper.

430 40 **Universal scraper starter set.**
With 1 razor-edged blade, 13 mm wide.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Removes sealing materials, glue residue, tape, labels.

Order-No.		
23159 0	Universal scraper with 1 blade	5

SB 430 4010 **Universal scraper set.**
With 10 razor-edged replacement blades, 13 mm wide.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Removes sealing materials, glue residue, tape, labels.
Extra: Blister packed.

Order-No.		
26920 3	Universal scraper with 1 blade and 10 replacement blades	5

Replacement blades.

SB 430 40 **Replacement blades for universal scraper.**
13 mm wide.
Blister packed, 10 pcs.

Order-No.	
27606 5	1

SB 430 40 **Replacement blades for universal scraper.**
20 mm wide.
Blister packed, 10 pcs.

Order-No.	
27902 8	1

SB 430 95 **Replacement blades for universal scraper.**
Rounded blade.
Blister packed, 10 pcs.

Order-No.	
27874 8	1

SB 430 96 **Replacement blades for universal scraper.**
Tapered blade.
Blister packed, 10 pcs.

Order-No.	
27875 5	1

Wiha wooden handle.

The all-rounder for woodworking applications.

The Wiha wooden handle is made of untreated, sealed beechwood.

Its hex bolster and specially developed handle profile underlines its professional claim.
This is expressed through the blade that extends to the end of the handle. This enables the user to loosen tightened screws with a hammer stroke, since the through blade conducts energy from the hammer stroke directly to the screw.
The handle end of the screwdriver is protected against damage by a high-quality, robust leather cap.

Wiha wooden-handle screwdriver – the allrounder made of beech is particularly suitable for all woodworking applications.

The through-blade, hex bolster and leather cap are the professional features that are particularly prized by users.

With hex bolster for greater torque transfer.

Wiha wooden handle.

- Handle made of sealed beechwood
- High torque can be transmitted even on the tightest screw with the help of the hex bolster for wrenches
- Blade extending through handle transmits the energy of the hammer stroke directly to the tightened screw
- Handle end protected with high-quality leather cap
- Precision blade tip, blade material of chrome-vanadium steel

For slotted, Phillips and Pozidriv screws.

162 **Wooden slotted screwdriver.**
Round blade with hex bolster.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
From size 5.5, blade extends through handle.
Anti-cam-out ribs, hex bolster.
Handle: Wiha wooden handle made of sealed beech wood, handle end protected with high-quality leather cap.
Application: For all applications in woodworking and furniture industries.

Order-No.							
00147 6	3,5	75	0,6	4,0	-	175	23	10
00151 3	4,5	90	0,8	5,0	-	190	23	10
00152 0	5,5	100	0,95	5,5	8	205	26	10
00153 7	7,0	125	0,95	6,0	10	230	26	10
00154 4	9,0	150	1,1	7,0	10	270	30	10
00156 8	10,0	175	1,2	8,0	13	295	30	10
00157 5	12,0	200	1,4	8,0	13	325	32	10
00158 2	14,0	250	1,75	10,0	16	380	34	5
00159 9	16,0	250	2,0	11,0	16	390	36	5

129 **Wooden Phillips screwdriver.**
Round blade with hex bolster.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha wooden handle made of sealed beech wood, handle end protected with high-quality leather cap.
Standards: ISO 8764.
Application: For all applications in woodworking and furniture industries.

Order-No.							
00057 8	PH1	80	4,5	8	180	23	10
00058 5	PH2	100	6,0	10	205	26	10
00059 2	PH3	150	8,0	13	270	30	10
00060 8	PH4	200	10,0	16	330	34	5

221 **Wooden Pozidriv screwdriver.**
Round blade with hex bolster.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha wooden handle made of sealed beech wood, handle end protected with high-quality leather cap.
Standards: ISO 8764.
Application: For all applications in woodworking and furniture industries.

Order-No.							
00412 5	PZ1	80	4,5	8	180	23	10
00413 2	PZ2	100	6,0	10	205	26	10
00414 9	PZ3	150	8,0	13	270	30	10

Reamer, awl. Sets.

300-11 **Reamer with wood handle, round blade and striking cap.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Made of beech, semi-gloss lacquered.
Application: For enlarging holes and drill holes in wood.

Order-No.					
32179 6	6,0	100	190	36	10

301-11 **Awl with wood handle, round blade and striking cap.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Made of beech, semi-gloss lacquered.
Application: For pre-punching holes and drill holes in wood.

Order-No.					
32180 2	6,0	100	190	36	10

162 HK6 SO **Wooden slotted/ Phillips screwdriver set, 6 pcs.**
Round blades with hex bolster.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
From size 5.5, blade extends through handle.
Anti-cam-out ribs, hex bolster.
Handle: Wiha wooden handle made of sealed beech wood, handle end protected with high-quality leather cap.
Application: For all applications in woodworking and furniture industries.

Order-No.	Series					
07149 3	162 HK6 SO					1
	162	3,5x75	4,5x90	5,5x100	7,0x125	
	129	PH1x80	PH2x100			

162 ZK6 SO **Wooden slotted/ Pozidriv screwdriver set, 6 pcs.**
Round blades with hex bolster.

Order-No.	Series					
07150 9	162 ZK6 SO					1
	162	3,5x75	4,5x90	5,5x100	7,0x125	
	221	PZ1x80	PZ2x100			

Wiha PicoFinish.

The comfortable precision screwdriver.

Colour-coded drive symbols on the rotating cap for easy recognition of the individual screwdrivers.

The PicoFinish is distinguished by top-quality materials and an ergonomic handle design.
The comfortable precision screwdriver with multi-component handle, rapid rotating zone and easy-movement rotating cap is a professional tool for all precision work for confined screw applications. To make things even easier for the user working with tiny screws, we've developed a second, smaller handle. The colour-coded marking of the drive symbol on the rotating cap is also new.
This makes it easier to recognise the individual screwdrivers when several are being used at once.



The blades are made of top-quality chrome-vanadium-molybdenum steel to ensure a particularly long tool life. They are subsequently through-hardened in a controlled process and chrome-plated.
The precise ChromTop® tip ensures a secure hold in the screw head.

The easy-movement rotating cap protects the palm of the hand.

Wiha PicoFinish.

- Ergonomic handle design with soft zone for comfortable work
- Easy-movement rotating cap for rapid hand action
- Colour-coded marking of the drive symbol for easy identification
- Through-hardened, chromeplated blade made of chromevanadium- molybdenum steel for a long tool life
- Wiha ChromTop® tip guarantees a secure hold in the screw head
- Ideal for all fine, filigree applications in electronics and precision-mechanics applications, as well as for DIY and model-building

For slotted screws.

260P **PicoFinish slotted screwdriver.**
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.

Order-No.						
00475 0	0.8	40	0.16	2.0	134	9	10
00476 7	1.0	40	0.18	2.0	134	9	10
00477 4	1.2	40	0.2	2.0	134	9	10
00478 1	1.5	40	0.25	2.0	134	9	10
00479 8	1.5	60	0.25	2.0	154	9	10
00480 4	1.8	40	0.3	2.0	134	9	10
00481 1	1.8	60	0.3	2.0	154	9	10
00482 8	2.0	40	0.4	2.0	140	18	10
00484 2	2.0	60	0.4	2.0	160	18	10
00485 9	2.0	100	0.4	2.0	200	18	10
00486 6	2.5	50	0.4	2.5	150	18	10
00487 3	2.5	75	0.4	2.5	175	18	10
00488 0	2.5	100	0.4	2.5	200	18	10
00490 3	3.0	50	0.5	3.0	150	18	10
00492 7	3.0	100	0.5	3.0	200	18	10
00493 4	3.0	150	0.5	3.0	250	18	10
00495 8	3.5	60	0.6	3.5	160	18	10
00497 2	4.0	60	0.8	4.0	160	18	10
00498 9	4.0	100	0.8	4.0	200	18	10
00499 6	4.0	150	0.8	4.0	250	18	10

For Phillips and Pozidriv screws.

261P **PicoFinish Phillips screwdriver.**
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.

Order-No.						
00513 9	PH000	40	2.0	134	9	10
00512 2	PH00	40	2.0	134	9	10
00514 6	PH00	60	2.0	154	9	10
00511 5	PH0	50	3.0	150	18	10
00515 3	PH0	75	3.0	175	18	10
00516 0	PH1	60	4.0	160	18	10
00517 7	PH1	80	4.0	180	18	10
00518 4	PH1	150	4.0	250	18	10

262P **PicoFinish Pozidriv screwdriver.**
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.

Order-No.						
04461 9	PZ0	50	3.0	150	18	10
04462 6	PZ1	60	4.0	160	18	10

Wiha PicoFinish.

The comfortable precision screwdriver.

For TORX® screws.

267P PicoFinish TORX® screwdriver.
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.

Order-No.						
25673 9	T1	40	2.5	134	9	10
25674 6	T2	40	2.5	134	9	10
20122 7	T3	40	2.5	134	9	10
20123 4	T4	40	2.5	134	9	10
00566 5	T5	40	2.5	134	9	10
00567 2	T6	40	2.5	140	18	10
00568 9	T7	40	2.5	140	18	10
00569 6	T8	40	2.5	140	18	10
00570 2	T9	50	3.0	150	18	10
00571 9	T10	50	3.0	150	18	10
00572 6	T15	60	3.5	160	18	10
00573 3	T20	60	4.0	160	18	10

267PR PicoFinish TORX® MagicSpring® screwdriver.
Handle with rotating cap and rapid-turning zone.
Retaining spring holds TORX® screws in place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: For setting and tightening TORX® screws in difficult to access areas.

Order-No.						
27729 1	T6	40	2.5	140	18	10
27730 7	T7	40	2.5	140	18	10
27731 4	T8	40	2.5	140	18	10
27732 1	T9	50	3.0	150	18	10
27733 8	T10	50	3.0	150	18	10
27734 5	T15	60	3.5	160	18	10

For TORX PLUS® screws.

267PIP PicoFinish TORX PLUS® screwdriver.
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.

Order-No.						
29100 6	4IP	40	2.5	134	9	10
29101 3	5IP	40	2.5	134	9	10
29102 0	6IP	40	2.5	140	18	10
29103 7	7IP	40	2.5	140	18	10
29104 4	8IP	40	2.5	140	18	10
29105 1	9IP	50	3.0	150	18	10
29106 8	10IP	50	3.0	150	18	10
29107 5	15IP	60	3.5	160	18	10
29108 2	20IP	60	4.0	160	18	10

Wiha Info

TORX® MagicSpring®.

Simply ingenious – the TORX® MagicSpring® screwdriver from Wiha.
Because of the "MagicSpring®" retaining spring made of stainless steel, TORX® screws are held securely in place.
An innovation, which will convince each user.

For hex socket screws.

263P PicoFinish hex screwdriver.
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.

Order-No.						
00519 1	0.7	40	0.028	134	9	10
00520 7	0.9	40	0.035	134	9	10
00521 4	1.3	40	0.05	134	9	10
00522 1	1.5	50	-	144	9	10
00523 8	2.0	50	5/64	150	18	10
00524 5	2.5	60	-	160	18	10
00525 2	3.0	60	-	160	18	10

263P Zoll PicoFinish hex screwdriver. Inch sizes.
Handle with rotating cap and rapid-turning zone.

Order-No.					
00526 9	1/16	50	144	9	10
00528 3	3/32	60	160	18	10
00530 6	7/64	60	160	18	10
00527 6	1/8	60	160	18	10

264P PicoFinish ball end hex screwdriver.
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.						
00531 3	1.3	40	134	0.05	9	10
00532 0	1.5	50	150	-	18	10
00533 7	2.0	50	150	-	18	10
00534 4	2.5	60	160	-	18	10
00535 1	3.0	60	160	-	18	10

264P Zoll PicoFinish ball end hex screwdriver. Inch sizes.
Handle with rotating cap and rapid-turning zone.

Order-No.					
00537 5	1/16	50	150	18	10
00541 2	5/64	50	150	18	10
00539 9	3/32	50	150	18	10
00542 9	7/64	60	160	18	10
00538 2	1/8	60	160	18	10
00543 6	9/64	60	160	18	10
00540 5	5/32	60	160	18	10

For hex nuts. Chip lifter.

265P PicoFinish hex nut driver.
Handle with rotating cap and rapid-turning zone.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.

Order-No.							
00544 3	1.5	60	2.5	3.0	160	18	10
00545 0	1.8	60	2.9	3.5	160	18	10
00546 7	2	60	3.2	4.0	160	18	10
00547 4	2.5	60	4.0	4.0	160	18	10
00548 1	3	60	5.0	5.0	160	18	10
00549 8	3.2	60	5.0	5.0	160	18	10
00550 4	3.5	60	5.3	6.0	160	18	10
00551 1	4	60	5.5	6.0	160	18	10
00552 8	4.5	60	6.2	7.0	160	18	10
00553 5	5	60	6.8	7.0	160	18	10
00554 2	5.5	60	7.6	8.0	160	18	10
00555 9	6	60	8.2	9.0	160	18	10
00556 6	7	60	9.6	10.0	160	18	10

265P Zoll PicoFinish hex nut driver. Inch sizes.
Handle with rotating cap and rapid-turning zone.

Order-No.					mm	
00561 0	3/32	60	160	18	2.38	10
00564 1	7/64	60	160	18	2.78	10
00559 7	1/8	60	160	18	3.18	10
00565 8	9/64	60	160	18	3.57	10
00562 7	5/32	60	160	18	3.97	10
00560 3	3/16	60	160	18	4.76	10
00563 4	7/32	60	160	18	5.56	10
00558 0	1/4	60	160	18	6.35	10

26810P PicoFinish chip lifter.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Handle: Wiha PicoFinish handle.
Application: For lifting tight parts on circuit boards.

Order-No.						
00574 0	1	3.5	50	150	18	5

Wiha PicoFinish.

The comfortable precision screwdriver.

Slotted/ Phillips sets.

260P K6 **PicoFinish slotted/ Phillips screwdriver set, 6 pcs.**
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.
Extra: Practical plastic rack with hanging holes.

Order-No.	Series					
00503 0	**260P K6**					1
	260P	1.5x40	2.0x40	2.5x50	3.0x50	
	261P	PH00x40	PH0x50			

TORX® sets.

267P K6M **PicoFinish TORX® screwdriver set, 6 pcs.**
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Profi set for mobile phones and electrical devices.
Extra: Practical plastic rack with hanging holes.

Order-No.	Series					
24002 8	**267P K6M**					1
	267P	T4x40	T5x40	T6x40		
		T7x40	T8x40	T9x50		

TORX® MagicSpring® set.

267PR K6 **PicoFinish TORX® MagicSpring® screwdriver set, 6 pcs.**
Handle with rotating cap and rapid-turning zone.
Retaining spring holds TORX® screws in place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: For setting and tightening TORX® screws in difficult to access areas.
Extra: Practical plastic rack with hanging holes.

Order-No.	Series					
27747 5	**267PR K6**					1
	267PR	T6x40	T7x40	T8x40		
		T9x50	T10x50	T15x60		

Ball end hex L-key set.

264P K6 **PicoFinish ball end hex screwdriver set, 6 pcs.**
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.
Extra: Practical plastic rack with hanging holes.
The ball end enables the user to work at angles up to 25°.

Order-No.	Series					
00536 8	**264P K6**					1
	263P	0.9x40				
	264P	1.3x40	1.5x50	2.0x50	2.5x60	3.0x60

260P K7 **PicoFinish slotted/ Phillips screwdriver set, 7 pcs.**
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.

Order-No.	Series					
00504 7	**260P K7**					1
	260P	1.5x40	2.0x40	2.5x50	3.0x50	
	261P	PH00x40	PH0x50	PH1x60		

267P K6 **PicoFinish TORX® screwdriver set, 6 pcs.**
Handle with rotating cap and rapid-turning zone.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.
Extra: Practical plastic rack with hanging holes.

Order-No.	Series					
03765 9	**267P K6**					1
	267P	T7x40	T8x40	T9x50		
		T10x50	T15x60	T20x60		

265P K6 **PicoFinish hex nut driver set, 6 pcs.**
Handle with rotating cap and rapid-turning zone.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha PicoFinish handle for rapid rotation.
Application: Ideal for high-precision work with electro-technical and precision components.
Extra: Practical plastic rack with hanging holes.

Order-No.	Series					
00557 3	**265P K6**					1
	265P	2.5x60	3x60	3.5x60		
		4x60	5x60	5.5x60		

Wiha torque screwdrivers.

Wiha makes it possible: Optimum fitting for perfect work.

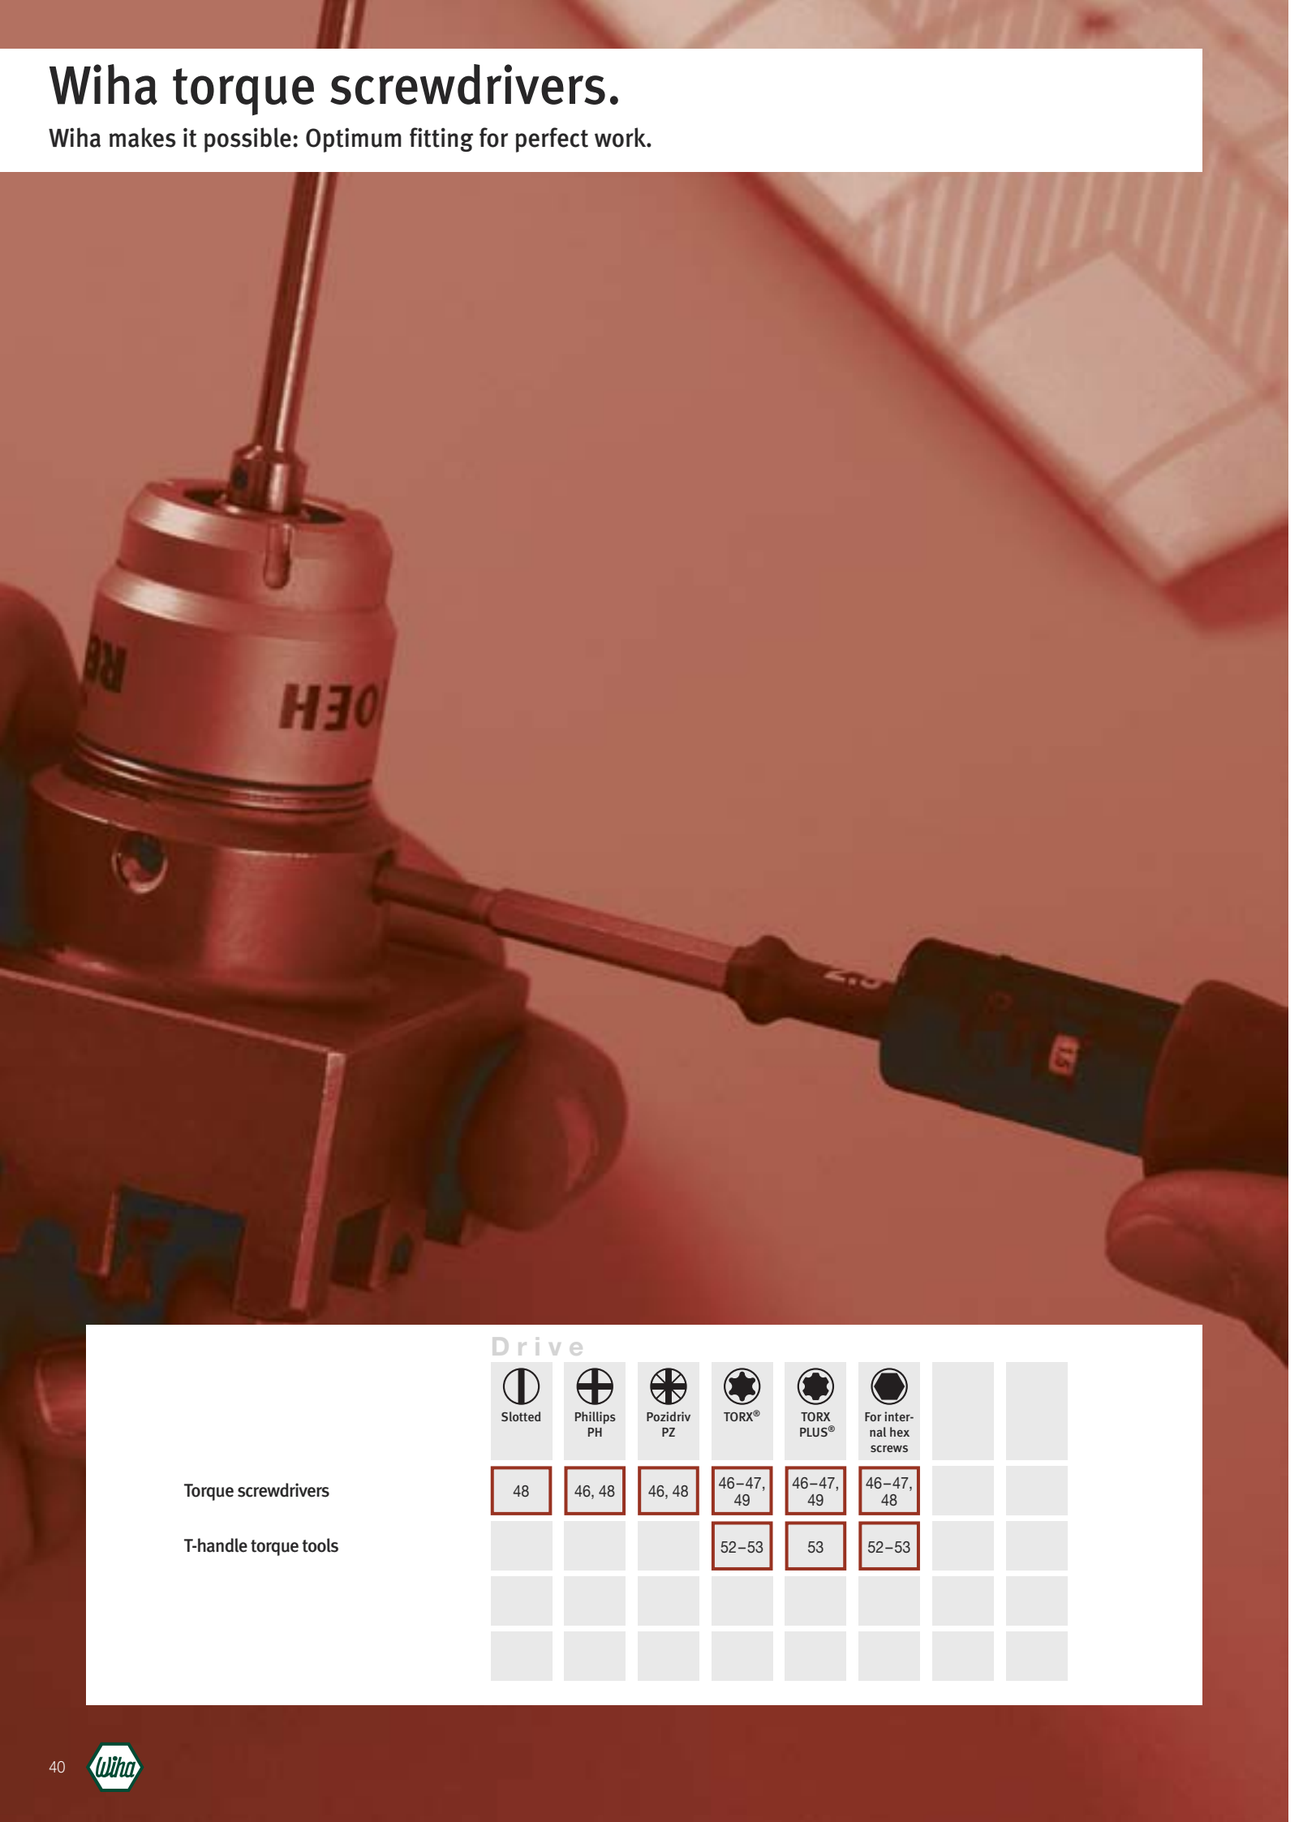

	Drive							
	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX PLUS®	For internal hex screws		
Torque screwdrivers	48	46, 48	46, 48	46–47, 49	46–47, 49	46–47, 48		
T-handle torque tools				52–53	53	52–53		

Assortment of torque screwdrivers

Wiha torque product range. ..... 42 – 45

Wiha torque screwdrivers.
Precise and high repeat accuracy. ..... 46 – 49

Wiha easyTorque torque screwdrivers.
The tough, preset auxiliary tool. 47

Wiha T-handle torque tools.
For screw applications requiring a specific amount of force. ..... 50 – 53

Wiha VDE torque screwdrivers.
See VDE tool range, page 242 –243

Wiha ESD torque screwdrivers.
See ESD tool range, page 278 – 280

Wiha torque screwdrivers.

Precise and high repeat accuracy.

Wiha *TorqueVario*®-*S*
Wiha *TorqueFix*®
Wiha *easyTorque*
Wiha *TorqueVario*®-*S* VDE
Wiha *TorqueVario*®-*S* ESD

▶ *See VDE tools, page 242 – 243*

▶ *See ESD tools, page 278 – 280*

A convincing concept.
The exact torque!
This is more and more vital for accurate and efficient work, especially when such accuracy must be maintained and repeated – as in the fastening and unfastening of sensitive and expensive components, in assembly or in final inspections and quality assurance applications. These are all perfect tasks for the new Wiha Torque series screwdrivers, with their ergonomic handles and a unique interchangeable blade system.

Focus Safety Silver 2007

The broad product range which is specialised for industrial applications, contains the TorqueFix® model with a fixed torque value, the TorqueVario® with a variable torque value but no scale and the TorqueVario®-S with an integrated window scale that displays the torque value numerically. TorqueVario®-S torque screwdriver is also available for anti-static applications in ESD environments and as a VDE insulated variant for working on live electrical components.

Innovative in every detail.

The new Wiha Torque product range is impressive with its ergonomics, precision and functionality. All torque screwdrivers are low weight, robust and precise in their design, as well as incorporating a unique interchangeable blade system. The blades are made from high quality chrome-vanadium-molybdenum steel, plastic coated and have their maximum usable torque value printed on them. When fastening and the screw reaches the desired torque, the operator will hear an audible click and the tool will no longer tighten the screw. In order to protect both the tool and the screw, all torque handles limit the tightening torque as well as applying a special limit to the loosening torque. This means that when loosening a screw the torque will be limited to a value that is approximately 30% larger than the tightening torque.

Patented handles.

SoftFinish® is the name of the patented handle concept from Wiha that forms the basis for the TorqueFix® and TorqueVario®-S torque handles. Impact-resistant polypropylene (PP) ensures a solid basis within the handle core. This is coated with the skin-friendly thermoplastic elastomer (TPE) by injection moulding. The ideal combination of materials for better gripping and slip resistance. Thanks to the unique, ergonomically perfect form, the handles feel really good to hold. The total of four handle sizes are optimally designed for specific torque levels.
A fundamental rule:

Low torque = small handle size.
High torque = large handle size.

Quality is the first principle.

With the mechanical precision components of the Wiha torque screwdrivers, an excellent repeat accuracy is maintained, even with constant use. For your safety, every tool is inspected and calibrated with a specially developed calibration and labelling system before shipping. Our works calibration takes place by comparison with reference standards based upon national standards. As a part of that, the following standards are fulfilled:

- EN ISO 6789
- BS EN 26789
- ASME B107.14M

The individual measured values are recorded in a works inspection protocol. This is included in delivery with every torque screwdriver.

Wiha easyTorque.

As with its big brother TorqueFix®, the easyTorque torque handle can be combined with colour-coded interchangeable blades from the Torque range. Because of robust, industrial quality, long service lives and a high level of functional safety are achieved. eaasyTorque screwdrivers are characterised by a release accuracy of ±10%.
The loosening torque is not limited. If a blade becomes blunt, it can be easily and quickly replaced. That is both practical and cost-efficient. Typical for easyTorque, with the best price performance ratio.

Wiha torque screwdrivers.

For every application the correct model.

Whether it's the TorqueVario®-S, the TorqueVario® or the TorqueFix®, Wiha has a torque screwdriver to cover almost every application.

The TorqueVario®-S ESD was developed for use in anti-static environments and the TorqueVario®-S VDE provides safety when working with live electrical components. All Wiha TorqueVario®-S models have an integrated window scale that displays the torque value – this virtually eliminates incorrect readings. The torque value is continuously adjustable by using the provided adjustment tool (Torque-Setter). This prevents the torque from being altered unintentionally.

Wiha torque screwdrivers.

TorqueVario®-S and TorqueFix®:

- Broad product programme, also covers oily, ESD and VDE applications
- Compact and particularly low weight design
- Ergonomic handle sizes that are proportional to the torque ranges
- Each tool is individually tested and marked with an identification number
- Clearly audible and perceptible click on attaining the pre-set torque
- Interchangeable blades are made from high quality chrome-vanadium steel
- Universal bit holder for all C 6.3 and E 6.3 bits, adapter blade for 1/4" nuts
- Fulfills all accuracy requirements as defined by EN ISO 6789, BS EN 26789 and ASME B 107.14M
- Torque accuracy ± 6% of the pre-set scale value
- Delivered with factory calibration certificate

easyTorque:

- Torque screwdriver with pre-set, fixed torque
- Robust industrial design
- Ergonomic handle with torque value printed on handle
- Interchangeable blades with colour coding
- Opening torque not mechanically limited
- Release accuracy ±10%

With scale

Setting tool

Wiha TorqueVario®-S with integrated scale.

The variable tool for a variety of tasks. Also suitable for oily work places or environments. An included adjustment tool (Torque Setter) and an integrated window scale allow for the easy adjustment and reading of torque values. Alltogether the user can choose from five models covering torque ranges from 0.1 Nm up to 8.0 Nm.

Example applications

...in trade and industry there are a multitude of sensitive or safety relevant screw connections which have defined required torque recommendations.

Wiha TorqueFix®.

The TorqueFix® has one, customer provided, torque value preset by Wiha. It's the ideal tool for use in a single application which always requires the same torque to be applied. Use in oily work environments is also not a problem, e.g. for fastening and unfastening of indexable cutter inserts. Wiha TorqueFix® is available in the torque ranges 0.5 Nm up to 7.2 Nm.

...in machining an exact and reliable screw tightness prevents damage to the screw and tool.

With scale

Wiha easyTorque.

Used for the fastening of indexable cutter inserts it does it duty dependably. The preset torque values are matched to the recommendations of well-known indexable cutter insert manufacturers.

With the easyTorque, assembling indexable inserts is safe and easy.

With scale

Setting tool

Wiha TorqueVario®-S VDE with integrated scale.

▶ *See page 242 –243*

For controlled tightening of the screw while providing user safety for electrical applications we offer the TorqueVario®-S VDE with an integrated window scale in combination with Wiha Torque VDE interchangeable blades. All VDE handles and blades are individually tested and provide safety up to 1000 V AC/ 1500 V DC. The Torque Vario®-S VDE series has three models covering torque ranges from 0.6 Nm up to 8.0 Nm.

...in electrical applications the new insulated TorqueVario®-S VDE torque screwdriver provides safety when working on live electrical equipment.

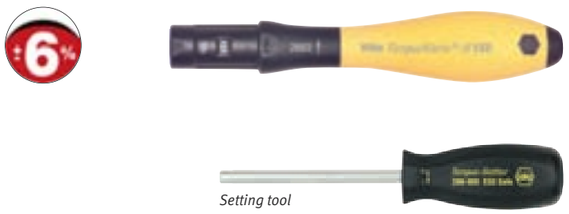

Setting tool

Wiha TorqueVario®-S ESD with integrated scale.

▶ *See page 278 – 280*

Specially designed for applications on electrostatic sensitive components and devices that are able to be damaged by electrostatic fields or discharges.
The dissipative handle and blade coating, with a surface resistance of 10^6 – 10^9 Ohms, controls electrostatic energy discharge. Four models cover torque ranges from 0.1 Nm up to 5.0 Nm.

...in electronic assemblies and ESD protected zones, where electrostatic sensitive components and devices must be grounded, the TorqueVario®-S ESD should be used.

Wiha torque screwdrivers.

TorqueVario®-S with scale.

with scale,
incl. Torque-Setter

2852 **TorqueVario®-S Torque screwdriver.**
Torque value can be set via window scale.
Automatic release.

Handle: Torque infinitely adjustable with Torque-Setter setting tool (also supplied).
Ergonomic multi-component handle, particulary light and compact.
Handle sizes proportioned to optimise torque setting.
Audible and perceptible click when the pre-set torque has been attained.
Standards: EN ISO 6798, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards (•model 0.1-0.6 Nm = ±10%).
Application: For applications where recommended torque settings are important.
Use in combination with a Wiha torque interchangeable blade.
Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order-No.	Nm				
26888 6	0.1-0.6•	4	127	23	1
26461 1	0.4-1.0	4	127	23	1
26462 8	0.8-2.0	4	131	30	1
26463 5	1.0-5.0	4	138	36	1
26464 2	2.0-8.0	4	142	41	1

• Accuracy ±10%

285-900 **Torque-Setter.**
Setting tool for variable torque screwdrivers.
Included in every torque screwdriver delivery.

Blade: Octagonal blade, through hardened, zinc-plated.
Handle: Cellulose acetate with micro-fine surface structure.

Order-No.		
26864 0	80	150	1

TorqueVario®-S sets.

with scale

2852 S10 **TorqueVario®-S Torque screwdriver set, 13 pcs.**
Torque value can be set via window scale.
With bit universal holder and 10 Phillips/ Pozidriv/ TORX®/ hex Standard bits.

Handle: Model 1.0-5.0 Nm.
Torque infinitely adjustable with Torque-Setter setting tool (also supplied).
Ergonomic multi-component handle, particulary light and compact.
Audible and perceptible click when the pre-set torque has been attained.
Standards: EN ISO 6798, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards.
Application: For applications where recommended torque settings are important.
Extra: Delivered in robust metal box, incl. factory calibration certificate.

Order-No.	Series				
26893 0	2852 S10				1
	2852	TorqueVario®-S Torque screwdriver, Model 1.0-5.0 Nm			
	2859	Torque bit universal holder			
	285-900	Torque-Setter			
	7011 Z	PH1x25	PH2x25		
	7012 Z	PZ1x25	PZ2x25		
	7015 Z	T10x25	T15x25	T20x25	T25x25
	7013 Z	3.0x25	4.0x25		

with scale

NEW
2852 S10-01 **TorqueVario®-S Torque screwdriver set, 13 pcs.**
Torque value can be set via window scale.
With bit universal holder and 10 TORX®/ TORX PLUS® Standard bits especially for applications with indexable cutter inserts.

Order-No.	Series				
34614 0	2852 S10-01				1
	2852	TorqueVario®-S Torque screwdriver, Model 1.0-5.0 Nm			
	2859	Torque bit universal holder			
	285-900	Torque-Setter			
	7015 Z	T7x25	T8x25	T9x25	T10x25	T15x25
	7016 Z	7IPx25	8IPx25	9IPx25	10IPx25	15IPx25

TorqueFix® and easyTorque.

2850 **TorqueFix® torque screwdriver.**
With a fixed torque value pre-set by Wiha.
Automatic release.

Handle: Ergonomic multi-component handle, particulary light and compact.
Handle sizes proportioned to optimise torque setting.
Audible and perceptible click when the pre-set torque has been attained.
Standards: EN ISO 6798, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards.
Application: For applications where recommended torque settings are important.
Use in combination with a Wiha torque interchangeable blade.
Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order-No.	Nm					
26127 6	0.5	4	112	23		1
26047 7	0.6	4	112	23		1
26327 0	0.8	4	112	23	NEW	1
26048 4	0.9	4	112	23		1
26133 7	1.1	4	119	30		1
26049 1	1.2	4	119	30	NEW	1
26051 4	2.0	4	119	30		1
26128 3	2.5	4	119	30		1
26052 1	3.0	4	126	36		1
26129 0	3.8	4	126	36		1
26053 8	5.0	4	132	41	NEW	1
26130 6	5.5	4	132	41		1
34533 4	6.0	4	132	41	NEW	1
26131 3	7.2	4	132	41		1

291 **easyTorque torque screwdriver.**
With a fixed torque value ex-factory.

Handle: Comfortable handle for good power transfer.
Rapid identification with imprint on handle end.
Release mechanism upon reaching of torque value.
Release accuracy ± 10%.
Opening torque not mechanically limited.
Mechanism insensitive to industrial lubricants.
Application: For controlled fastening and unfastening of indexable cutter inserts.
Easy-to-clean grip surface, especially for industrial applications.

Order-No.	Nm				
30342 6	0.5	4	103	32	1
30343 3	0.6	4	103	32	1
30344 0	0.9	4	103	32	1
30345 7	1.1	4	103	32	1
30346 4	1.2	4	103	32	1
30347 1	1.4	4	103	32	1
30348 8	2.0	4	103	32	1
30349 5	2.5	4	103	32	1
30350 1	3.0	4	103	32	1
30351 8	3.8	4	103	32	1

easyTorque with blade.

NEW
291 **easyTorque torque screwdriver.**
For Allen screws with fixed torque value.

Blade: Interchangeable blade system for rapid, cost-saving replacement of blade after wear.
High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Comfortable handle for good power transfer.
Rapid identification with imprint on handle end.
Release mechanism upon reaching of torque value.
Release accuracy ± 10%.
Opening torque not mechanically limited.
Mechanism insensitive to industrial lubricants.
Application: For controlled fastening and unfastening of indexable cutter inserts.
Recommended torque values matched to specifications from leading indexable cutter insert manufacturers.
Easy-to-clean grip surface, especially for industrial applications.

Order-No.	Nm					
33633 2	1.4	2.0	75	103	32	1
33634 9	2.0	2.5	75	103	32	1
33635 6	3.0	3.0	75	103	32	1

NEW
291 **easyTorque torque screwdriver.**
For TORX® screws with fixed torque value.

Order-No.	Nm					
33636 3	0.6	T6	75	103	32	1
33637 0	0.9	T7	75	103	32	1
33638 7	1.2	T8	75	103	32	1
33639 4	1.4	T9	75	103	32	1
33640 0	2.0	T10	75	103	32	1
33641 7	3.0	T15	75	103	32	1

NEW
291 **easyTorque torque screwdriver.**
For TORX PLUS® screws with fixed torque value.

Order-No.	Nm					
33642 4	0.6	6IP	75	103	32	1
33643 1	0.9	7IP	75	103	32	1
33644 8	1.2	8IP	75	103	32	1
33645 5	1.4	9IP	75	103	32	1
33646 2	2.0	10IP	75	103	32	1
33647 8	3.0	15IP	75	103	32	1

Wiha torque screwdrivers.

Torque interchangeable blades.

2859 **Torque slotted interchangeable blade.**
For Wiha torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: grey.
Standards: Tip DIN ISO 2380.
Application: For applications where recommended torque settings are important.

Order-No.						max. Nm	
26227 3	0.25	1.5	4	175	42	0.15	10
26228 0	0.4	2.0	4	175	42	0.4	10
26151 1	0.4	2.5	4	175	42	0.4	10
26277 8	0.5	3.0	4	175	42	0.6	10
26278 5	0.6	3.5	4	175	42	1.1	10
26279 2	0.8	4.0	4	175	42	2.5	10

2859 **Torque Phillips interchangeable blade.**
For Wiha torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: dark blue.
Standards: Tip DIN ISO 8764.
Application: For applications where recommended torque settings are important.

Order-No.					max. Nm	
26199 3	PH000	4	175	42	0.4	10
26196 2	PH00	4	175	42	0.4	10
26197 9	PH0	4	175	42	0.9	10
26058 3	PH1	4	175	42	3.8	10
27079 7	PH2	4	175	42	5.5	10

Torque interchangeable blades.

2859 **Torque Pozidriv interchangeable blade.**
For Wiha torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: light blue.
Standards: Tip DIN ISO 8764.
Application: For applications where recommended torque settings are important.

Order-No.					max. Nm	
26198 6	PZ0	4	175	42	0.9	10
26148 1	PZ1	4	175	42	3.8	10
26889 3	PZ2	4	175	42	5.5	10

2859 **Torque hex interchangeable blade.**
For Wiha torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: red.
Application: For applications where recommended torque settings are important.

Order-No.					max. Nm	
26544 1	1.3	4	175	42	0.4	10
26200 6	1.5	4	175	42	0.9	10
26060 6	2.0	4	175	42	1.8	10
26061 3	2.5	4	175	42	3.8	10
26062 0	3.0	4	175	42	5.5	10
26063 7	4.0	4	175	42	8.0	10

2859 **Torque ball end hex interchangeable blade.**
For Wiha torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: red.
Application: For applications where recommended torque settings are important.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.					max. Nm	
26221 1	1.5	4	175	42	0.4	10
26222 8	2.0	4	175	42	0.9	10
26223 5	2.5	4	175	42	2.0	10
26224 2	3.0	4	175	42	3.8	10
26225 4	4.0	4	175	42	8.0	10

Torque interchangeable blades.

2859 **Torque TORX® interchangeable blade.**
For Wiha torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: dark green.
Application: For applications where recommended torque settings are important.
Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.					max. Nm	
30852 0	T4	4	175	42	0.25	10
26158 0	T5	4	175	42	0.4	10
26064 4	T6	4	175	42	0.6	10
26065 1	T7	4	175	42	0.9	10
26066 8	T8	4	175	42	1.3	10
26059 0	T9	4	175	42	2.5	10
26067 5	T10	4	175	42	3.8	10
26068 2	T15	4	175	42	5.5	10
26069 9	T20	4	175	42	8.0	10
26070 5	T25	4	175	42	8.0	10

2859 **Torque TORX® MagicSpring® interchangeable blade.**
For Wiha torque screwdrivers.
Retaining spring holds TORX® screws in place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: dark green.
Application: For applications where recommended torque settings are important.
Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.					max. Nm	
27818 2	T6	4	175	42	0.6	10
27812 0	T7	4	175	42	0.9	10
27813 7	T8	4	175	42	1.3	10
27814 4	T9	4	175	42	2.5	10
27815 1	T10	4	175	42	3.8	10
27816 8	T15	4	175	42	5.5	10
27817 5	T20	4	175	42	8.0	10
29467 0	T25	4	175	42	8.0	10

2859 **Torque bit universal holder.**
For Wiha torque screwdrivers.
Suitable for C 6.3 and E 6.3 (1/4") bits.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Sleeve: Made of stainless steel, blue plastic coated.
Application: For applications where recommended torque settings are important.

Order-No.					
27526 6	1/4	4	162	11	10

Torque interchangeable blades.

2859 **Torque TORX PLUS® interchangeable blade.**
For Wiha torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: light green.
Application: For applications where recommended torque settings are important.
Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.					max. Nm	
26159 7	5IP	4	175	42	0.5	10
26071 2	6IP	4	175	42	0.8	10
26152 8	7IP	4	175	42	1.3	10
26072 9	8IP	4	175	42	2.0	10
26154 2	9IP	4	175	42	3.0	10
26155 9	10IP	4	175	42	4.5	10
26073 6	15IP	4	175	42	6.6	10
26156 6	20IP	4	175	42	8.0	10
26157 3	25IP	4	175	42	8.0	10

2859 **Torque TORX PLUS® MagicSpring® interchangeable blade.**
For Wiha torque screwdrivers.
Retaining spring holds TORX PLUS® screws in place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: light green.
Application: For applications where recommended torque settings are important.
Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.					max. Nm	
29553 0	6IP	4	175	42	0.8	10
29554 7	7IP	4	175	42	1.3	10
29555 4	8IP	4	175	42	2.0	10
29556 1	9IP	4	175	42	3.0	10
29557 8	10IP	4	175	42	4.5	10
29558 5	15IP	4	175	42	6.6	10
29559 2	20IP	4	175	42	8.0	10
29560 8	25IP	4	175	42	8.0	10

2859 **Torque adapter blade.**
For Wiha torque screwdrivers.
Suitable for 1/4" square sockets.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Head: Nickel-plated, spring-mounted ball.
Application: For applications where recommended torque settings are important.

Order-No.				
26229 7	1/4	4	155	10

Wiha T-handle torque tools.

For screw applications requiring a specific amount of force.

Wiha *TorqueVario*® - *ST*plus
Wiha *TorqueFix*® - *T*plus

With slipping clutch – precise, ergonomic, robust.

Tightening screws properly! Even in higher torque ranges? No problem with the new ergonomic T-handle torque tools from Wiha. Tightening screws to a pre-set torque has never been so easy, comfortable and economical!

Perfectly shaped.

The special feature of these tools is the ergonomic, multi-component T-handle with the striking soft zones that allow particularly comfortable and effortless power transmission, even at higher torques.

Sophisticated mechanism.

The T-handle's extremely light, multi-component plastic sleeve conceals a precise torque mechanism. This is sealed in an oil-lubricated bearing and is thus extremely low-wear with a long tool life. As soon as the pre-set torque has been attained, there is a clearly audible and perceptible click to prevent exceeding the pre-set value. Overtightening of the pre-set value is therefore eliminated. Release accuracy is ±6% of the pre-set scale value, as required by EN ISO 6789. To prevent users from breaking the blade or damaging the screw when loosening the screw, the tools limit the tightening torque, as well as apply a special limit to the loosening torque; this is approximately 30 % greater than the tightening torque.

Fixed or variable setting of torque value.

Depending on the intended application, we recommend one of the **TorqueFix®-Tplus** models with a pre-set, fixed torque value or the **TorqueVario®-STplus** with scale and a variable torque value from 5 – 14 Nm. In the case of the variable T-handle tool, the torque value is continuously adjustable on the handle via the adjustment tool supplied with it. The numerical display of the setting value in the upper handle enables the pre-set value to be easily read-off in Nm; this virtually eliminates incorrect readings.

Universal and flexible.

6-mm interchangeable blades made of high-quality, tough-but flexible chrome-vanadium molybdenum steel are available to match the handles. Two adapter blades for nuts (1/4" and 3/8"), together with a plastic-coated universal bit holder for all C 6.3 and E 6.3 (1/4") bits, complete the product range.

Safety first.

Before it leaves the factory, each T-handle torque tool is inspected, calibrated and allotted an identification number. The result of the calibration is documented in a factory calibration certificate, which is included free of charge with each tool. This factory calibration certificate also documents compliance with national standards.

Wiha T-handle torque tools.

- T-handle with soft zones is comfortable to hold
- High-quality and robust, precision construction
- Variable design with easy-to-read, numerical scale
- Each handle is individually tested, laser-calibrated and marked with an identification number
- Limit to the tightening and loosening torque prevents damage to the tool and screw
- Torque accuracy ± 6% of the pre-set scale value
- Large selection of interchangeable blades, adapter blades for nuts and bit holders
- Supplied with factory calibration certificate

The ergonomically shaped multi-component T-handle ensures fatigue-resistant power transfer.

Wiha's new T-handle torque tools. Easy to adjust, durable and comfortable.

Wiha T-handle torque tools.

T-handle torque tools with scale.

with scale

2893 **TorqueVario®-STplus T-handle torque tool.**
Torque can be set via numerical scale.
With slipping clutch.

Handle: Window scale displays torque value numerically.
Torque infinitely adjustable with Torque-Setter setting tool (also supplied).
Soft-grip T-handle for extreme comfort and optimal torque transmission.
Audible and perceptible click when the pre-set torque has been attained.
Standards: Based on EN ISO 6789, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards.
Application: For applications where recommended torque settings are important.
Use in combination with an interchangeable 6 mm blade for Wiha T-handle torque tools.
Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order-No.	Nm				
29233 1	**5-14**	**6**	56	120	1

with scale

2893 S01 **TorqueVario®-STplus T-handle torque tool set, 11 pcs.**
With bit universal holder, 6 TORX®/ hex Standard bits and 2 adapter blades for nuts.

Handle: Model 5-14 Nm.
Window scale displays torque value numerically.
Torque infinitely adjustable with Torque-Setter setting tool (also supplied).
Soft-grip T-handle for extreme comfort and optimal torque transmission.
Standards: Based on EN ISO 6789, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards.
Application: For applications where recommended torque settings are important.
Extra: Delivered in robust metal box, incl. factory calibration certificate.

Order-No.	Series				
29234 8	**2893 S01**				1
	2893	TorqueVario®-STplus T-handle torque tool, Model 5-14 Nm			
	289-900	Torque-Tplus Setter			
	2899	Torque-Plus adapter blade	1/4"	3/8"	
	2899	Torque-Tplus bit quick release holder		1/4"	
	7015 Z	T25x25	T30x25	T40x25	
	7013 Z	4,0x25	5,0x25	6,0x25	

Pre-set T-handle torque tools.

without scale

2891 **TorqueFix®-Tplus T-handle torque tool.**
With a fixed torque value pre-set by Wiha.
Automatic release.
With slipping clutch.

Handle: Soft-grip T-handle for extreme comfort and optimal torque transmission.
Audible and perceptible click when the pre-set torque has been attained.
Standards: Based on EN ISO 6789, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards.
Application: For applications where recommended torque settings are important.
Use in combination with an interchangeable 6 mm blade for Wiha T-handle torque tools.
Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order-No.	Nm				
29228 7	**6**	**6**	56	120	1
29229 4	**8**	**6**	56	120	1
29230 0	**10**	**6**	56	120	1
29231 7	**12**	**6**	56	120	1
29236 2	**12.5**	**6**	56	120	1
29232 4	**14**	**6**	56	120	1

Torque-Tplus Setter and interchangeable blades.

289-900 **Torque-Tplus Setter.**
Setting tool for variable T-handle torque tools.
Included in every T-handle torque tool delivery.

Blade: Octagonal profile with drilled tip, through hardened, zinc-plated.
Handle: Made of impact resistant cellulose acetate.

Order-No.			
28691 0	**80**	**150**	1

2899 **Torque-Tplus TORX® interchangeable blade.**
For T-handle torque tools.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Colour-coding: dark green.
Application: For applications where recommended torque settings are important.

Order-No.					max. Nm	max. in.lbs.	
28734 4	**T15**	**6**	130	53	6	53	10
28735 1	**T20**	**6**	130	53	10	88	10
28736 8	**T25**	**6**	130	53	15	132	10
28737 5	**T27**	**6**	130	53	15	132	10
28738 2	**T30**	**6**	130	53	15	132	10
28739 9	**T40**	**6**	130	53	15	132	10

2899 **Torque-Tplus TORX PLUS® interchangeable blade.**
For T-handle torque tools.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Colour-coding: light green.
Application: For applications where recommended torque settings are important.

Order-No.					max. Nm	max. in.lbs.	
28740 5	**15IP**	**6**	130	53	8	70	10
28741 2	**20IP**	**6**	130	53	13	115	10
28742 9	**25IP**	**6**	130	53	15	132	10
28743 6	**27IP**	**6**	130	53	15	132	10
28744 3	**30IP**	**6**	130	53	15	132	10
28745 0	**40IP**	**6**	130	53	15	132	10

Interchangeable blades.

2899 **Torque-Tplus hex interchangeable blade.**
For T-handle torque tools.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Colour-coding: red.
Application: For applications where recommended torque settings are important.

Order-No.					max. Nm	max. in.lbs.	
28746 7	**3**	**6**	130	53	9	79	10
28747 4	**4**	**6**	130	53	15	132	10
28748 1	**5**	**6**	130	53	15	132	10
28749 8	**6**	**6**	130	53	15	132	10

2899 **Torque-Tplus bit quick release holder.**
For T-handle torque tools.
Suitable for C 6.3 and E 6.3 (1/4") bits.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Sleeve: Quick release bit holder for T-handle torque tools.
Enables ultra fast bit changes.
Application: For controlled turning of screws with bits at a prescribed torque.

Order-No.					
28758 0	**1/4**	**6**	125	11	105 mm visible length	10

2899 **Torque-Tplus adapter blade.**
For T-handle torque tools.
Suitable for 1/4" respc. 3/8" square sockets.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Head: Nickel-plated, spring-mounted ball.
Application: For controlled turning of screws with nuts at a prescribed torque.

Order-No.						
28756 6	**1/4**	**6**	120	53	100 mm visible length	10
28757 3	**3/8**	**6**	120	53	100 mm visible length	10

Wiha reversible blade systems.

The flexible, versatile interchangeable tools.

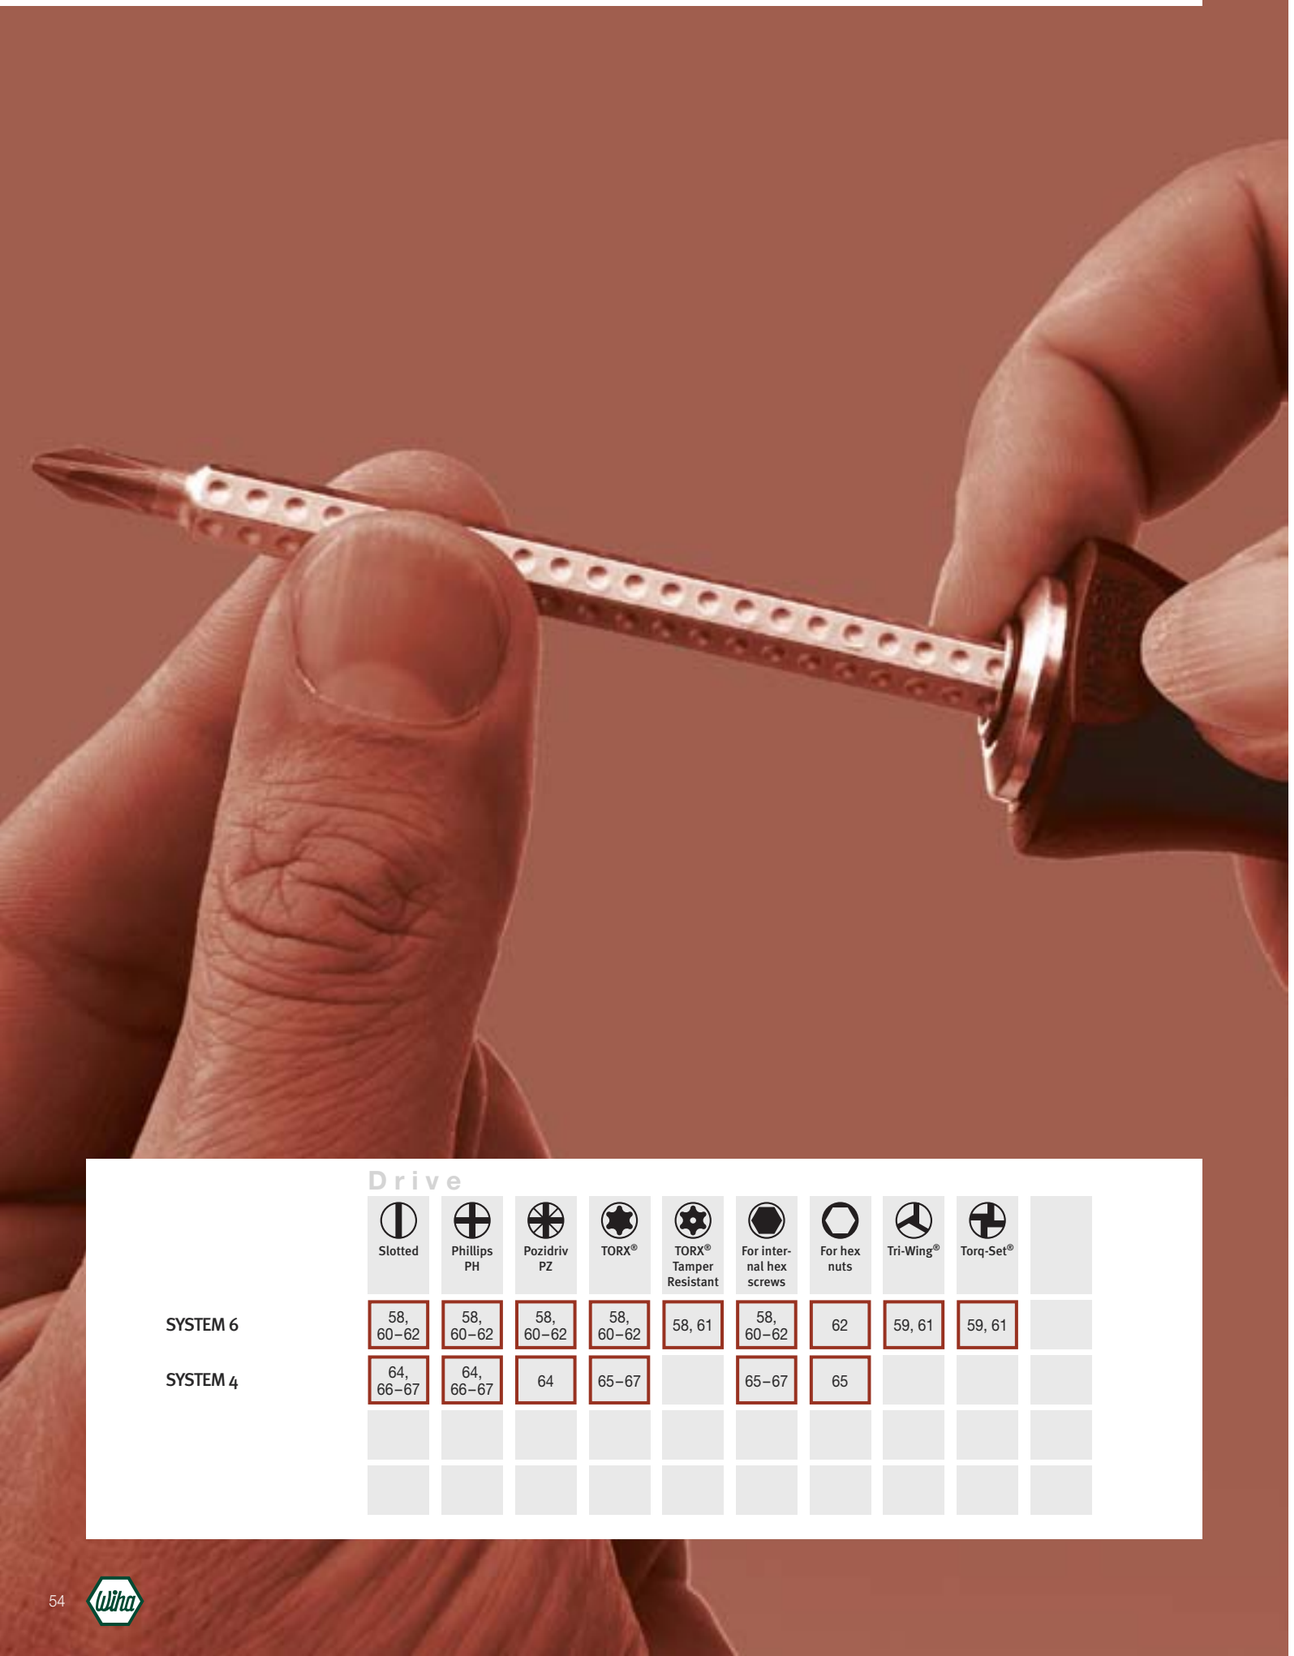

	Drive									
	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX® Tamper Resistant	For internal hex screws	For hex nuts	Tri-Wing®	Torq-Set®	
SYSTEM 6	58, 60–62	58, 60–62	58, 60–62	58, 60–62	58, 61	58, 60–62	62	59, 61	59, 61	
SYSTEM 4	64, 66–67	64, 66–67	64	65–67		65–67	65			

Reversible blade systems range

Wiha SYSTEM 6.
The compact allrounder. ..... 56 – 62

Wiha SYSTEM 4.
Ideal for precision work. ..... 63 – 67

Wiha ESD reversible blade systems.
See ESD tool range, page 272 – 277

Wiha SYSTEM 6.

The compact allrounder.

Are you looking for a versatile and compact tool system for your toolcase or for use on the road? Then our **SYSTEM 6** system with its 6 mm reversible blades and corresponding handles is the right solution for you. Just choose the right variation from the large selection of handles and reversible blades or decide on one of the **SYSTEM 6** sets.

- The **Starter Sets** in the robust roll-up bag are already equipped with the most commonly used reversible blades and offer space for a max. of 11 additional reversible blades.
- The **Professional Sets** are the perfect solution if you are looking for a professional, high-quality universal set in a rugged metal box.
- The practical sets in **roll-up pouches** are especially handy and compact.

The **Wiha SYSTEM 6** reversible blade systems are high-quality, industrial quality products, made with state-of-the-art materials and finished to the highest standard of workmanship. The 150 mm long reversible blades are made of high-quality chrome-vanadium-molybdenum steel, are through-hardened and chrome-plated. The various handles are especially ergonomically designed and guarantee optimal force-transmission.The **Wiha SYSTEM 6** system provides the right tool for every application – ideal for industry, trade and the ambitious handyman.

The Wiha SYSTEM 6 range is the compact allrounder for different applications.



The SoftFinish® telescopic handle with ClickStop ball clamping for a secure hold and rapid blade change.

Wiha SYSTEM 6.

- Flexible, versatile reversible-blade system in industrial quality
- Expandable individual tool system
- Ergonomic handles for almost every application
- Colour-coded blades made of high-quality, tough chrome-vanadium-molybdenum steel, through-hardened, chrome-plated
- Wiha ChromTop® tips ensure a perfect fit every time

SYSTEM 6 handles.

284 **SYSTEM 6 SoftFinish®-telescopic handle.**
Ergonomic multi-component handle with roll-off protection.

Handle: With 6 mm hex retainer.
Enables adjustable blade lengths from 42 - 114 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Versatile for general applications in the workshop and factory.

Order-No.				
30372 3	6.0	115	36	5

SB 284 **SYSTEM 6 SoftFinish®-telescopic handle.**
Blister packed.

Order-No.				
30404 1	6.0	122	36	1

284ESD **SYSTEM 6 SoftFinish®-telescopic ESD handle.**
Dissipative handle, ESD-safe.

Handle: Ergonomic multi-component handle with roll-off protection.
With 6 mm hex retainer.
Enables adjustable blade lengths from 42 - 114 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.				
31496 5	6.0	115	36	5

Safety Notice:
Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.

SYSTEM 6 handles.

481 M01 **SYSTEM 6 Magnetic handle.**
With built-in magnetiser/ demagnetiser.

Handle: With built-in magnetiser/ demagnetiser.
With hex bolster for additional torque.
Use in combination with SYSTEM 6 reversible blades.
Application: For magnetising/ demagnetising SYSTEM 6 reversible blades.

Order-No.				
27625 6	6.0	110	33	5

282 **SYSTEM 6 Topra ratchet.**
For all SYSTEM 6 reversible blades and 1/4" bits.

Handle: With anti-clockwise rotation, clockwise rotation and locked position.
Application: For best user comfort and high torque transfer.

Order-No.				
03767 3	6.0	100	85	5

Press sleeve:
=> Blade locking is released

Press and hold down sleeve:
=> Set desired blade length

Release sleeve:
=> Blade is held securely

Wiha SYSTEM 6.

The compact allrounder.

SYSTEM 6 reversible blades.

284 **SYSTEM 6 slotted reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.							
27627 0	**3.5**	**4.5**	0.6	0.8	150	6.0	5
00629 7	**4.0**	**6.0**	0.8	1.0	150	6.0	5
00630 3	**5.5**	**6.5**	1.0	1.2	150	6.0	5

284 **SYSTEM 6 combined slotted-Phillips reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.						
00665 5	**4.0**	**PH1**	0.8	150	6.0	5
00666 2	**6.0**	**PH2**	1.0	150	6.0	5
00667 9	**6.5**	**PH3**	1.2	150	6.0	5

284 **SYSTEM 6 Phillips reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.					
00631 0	**PH1**	**PH2**	150	6.0	5
27628 7	**PH2**	**PH3**	150	6.0	5

284 **SYSTEM 6 Pozidriv reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.					
00632 7	**PZ1**	**PZ2**	150	6.0	5
27629 4	**PZ2**	**PZ3**	150	6.0	5

SYSTEM 6 reversible blades.

284 **SYSTEM 6 combined ball end hex - hex reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Extra: The ball end enables the user to work at angles up to 25°.

Order-No.					
00635 8	**2.5**	**2.5**	150	6.0	5
00636 5	**3**	**3**	150	6.0	5
00637 2	**4**	**4**	150	6.0	5
00638 9	**5**	**5**	150	6.0	5
00639 6	**6**	**6**	150	6.0	5

284 **SYSTEM 6 TORX® reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.					
00654 9	**T6**	**T8**	150	6.0	5
00655 6	**T7**	**T9**	150	6.0	5
00656 3	**T10**	**T15**	150	6.0	5
00657 0	**T20**	**T25**	150	6.0	5
00658 7	**T30**	**T40**	150	6.0	5

284 **SYSTEM 6 TORX® Tamper Resistant reversible blade.**
For TORX® screws with locking pin.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. With borehole in the blade tip.

Order-No.					
27630 0	**T6H**	**T8H**	150	6.0	5
27631 7	**T7H**	**T9H**	150	6.0	5
27632 4	**T10H**	**T15H**	150	6.0	5
27633 1	**T20H**	**T25H**	150	6.0	5
27634 8	**T30H**	**T40H**	150	6.0	5

SYSTEM 6 reversible blades.

284 **SYSTEM 6 Tri-Wing® reversible blade.**
For Tri-Wing® security screws.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.					
27637 9	**TW0**	**TW1**	150	6.0	5
27638 6	**TW2**	**TW3**	150	6.0	5
27639 3	**TW4**	**TW5**	150	6.0	5

284 **SYSTEM 6 Torq-Set® reversible blade.**
For Torq-Set® security screws.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.					
27635 5	**TS2**	**TS4**	150	6.0	5
27636 2	**TS6**	**TS8**	150	6.0	5

SYSTEM 6 reversible blades.

7802 **SYSTEM 6 bit holder.**
Suitable for C 6.3 and E 6.3 (1/4") bits.

Blade: Chrome-vanadium steel, through hardened, chrome-plated. Bit retainer made of stainless steel with integrated permanent magnet.

Order-No.					
03882 3	**1/4**	**164**	6.0	10	5

7803 **SYSTEM 6 adapter blade.**
Suitable for 1/4" square sockets.

Blade: Chrome-vanadium steel, through hardened, chrome-plated. 1/4" square drive with ball retainer.

Order-No.				
03883 0	**1/4**	**164**	6.0	5

U109 00 **SYSTEM 6 extension blade.**
Suitable for blades.

Blade: Chrome-vanadium steel, through hardened, chrome-plated. Extends all SYSTEM 6 blades up to 100 mm.

Order-No.					
08921 4	**6.0**	**166**	6.0	11	5

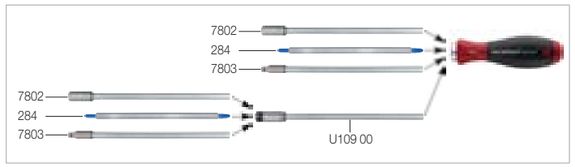

Suitable for every use: the blades can be quickly combined, extended and interchanged.

Wiha Info

Did you already know?

TORX® Tamper Resistant screwdrivers can also be used for TORX® screws, but not vice versa.

Wiha SYSTEM 6.

The compact allrounder.

SYSTEM 6 Starter sets.

Telescopic

281 T6 **SYSTEM 6 reversible blades set, 6 pcs.**
Slotted/ Phillips/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 42 - 114 mm.
Handle: SYSTEM 6 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Versatile and space-saving, it fits in every toolbox.
Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
27715 4	281 T6				1
	284	SYSTEM 6 SoftFinish®-telescopic handle			
	284	3.5 - 4.5	4.0 - 6.0	5.5 - 6.5	
	284	PH1 - PH2			
	284	5 - 5			

SYSTEM 6 Magnetic set.

481 T6 **SYSTEM 6 reversible blades set, 6 pcs.**
Slotted/ Phillips/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.
Handle: SYSTEM 6 Magnetic handle. With built-in magnetiser/ demagnetiser.
Application: Versatile and space-saving, it fits in every toolbox.
Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
27717 8	481 T6				1
	481 M01	SYSTEM 6 Magnetic handle			
	284	3.5 - 4.5	4.0 - 6.0	5.5 - 6.5	
	284	PH1 - PH2			
	284	5 - 5			

Telescopic

281 T6 01 **SYSTEM 6 reversible blades set, 6 pcs.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 42 - 114 mm.
Handle: SYSTEM 6 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Versatile and space-saving, it fits in every toolbox.
Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
32298 4	281 T6 01				1
	284	SYSTEM 6 SoftFinish®-telescopic handle			
	284	4.0 - 6.0			
	284	PH1 - PH2			
	284	PZ1 - PZ2			
	284	T10 - T15	T20 - T25		

Wiha Info

SYSTEM 6 Magnetic.

The ideal set for magnetising or demagnetising screwdriver blades and similar tools made of steel.

Magnetising

Demagnetising

SYSTEM 6 professional sets.

Telescopic

281 B11 **SYSTEM 6 reversible blades set, 11 pcs.**
Slotted/ Phillips/ Pozidriv/ TORX®/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 42 - 114 mm.
Handle: SYSTEM 6 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Set in a rugged metal box for professional applications.

Order-No.	Series				
00623 5	281 B11				1
	284	SYSTEM 6 SoftFinish®-telescopic handle			
	284	4.0 - 6.0	5.5 - 6.5		
	284	PH1 - PH2			
	284	PZ1 - PZ2			
	284	T10 - T15	T20 - T25	T30 - T40	
	284	4 - 4	5 - 5	6 - 6	

SYSTEM 6 Security and Topra set.

For security screws • Telescopic

281 B11 01 **SYSTEM 6 reversible blades set, 11 pcs.**
Tri-Wing®/ Torq-Set®/ TORX® Tamper Resistant.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 42 - 114 mm.
Handle: SYSTEM 6 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Set for safety screws in a rugged metal box.

Order-No.	Series				
27714 7	281 B11 01				1
	284	SYSTEM 6 SoftFinish®-telescopic handle			
	284	TW0 - TW1	TW2 - TW3	TW4 - TW5	
	284	TS2 - TS4	TS6 - TS8		
	284	T6H - T8H	T7H - T9H	T10H - T15H	
		T20H - T25H	T30H - T40H		

282 B11-1 **SYSTEM 6 reversible blades set, 11 pcs.**
Slotted/ Phillips/ Pozidriv/ TORX®/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.
Handle: SYSTEM 6 Topra ratchet. With anti-clockwise rotation, clockwise rotation and locked position.
Application: Set with ratchet handle in a rugged metal box for professional applications.

Order-No.	Series				
03773 4	282 B11-1				1
	282	SYSTEM 6 Topra ratchet			
	284	4.0 - 6.0	5.5 - 6.5		
	284	PH1 - PH2			
	284	PZ1 - PZ2			
	284	T10 - T15	T20 - T25	T30 - T40	
	284	4 - 4	5 - 5	6 - 6	

SB 282 122 **SYSTEM 6 Topra set, 12 pcs.**
With 1/4" bit holder and 10 bits.

Handle: SYSTEM 6 Topra ratchet. For best user comfort and high torque transfer.
Extra: Blister packed.

Order-No.	Series				
05672 8	SB 282 122				1
	282	SYSTEM 6 Topra ratchet			
	7802	SYSTEM 6 bit holder			
	7010 Z	4.5x25	5.5x25	6.5x25	8.0x25
	7011 Z	PH1x25	PH2x25	PH3x25	
	7015 Z	T10x25	T15x25	T20x25	

Wiha SYSTEM 6.

The compact allrounder.

SYSTEM 6 sets.

281 T11 **SYSTEM 6 reversible blades set, 11 pcs.**
Slotted/ Phillips/ Pozidriv/ TORX®/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.
Blade length is adjustable from 42 - 114 mm.

Handle: SYSTEM 6 SoftFinish®-telescopic handle.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.

Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
03591 4	281 T11				1
	284	SYSTEM 6 SoftFinish®-telescopic handle			
	284	4.0 - 6.0	5.5 - 6.5		
	284	PH1 - PH2			
	284	PZ1 - PZ2			
	284	T10 - T15	T20 - T25	T30 - T40	
	284	4 - 4	5 - 5	6 - 6	

SYSTEM 6 sets.

U106 T8 **SYSTEM 6 nut driver set, 8 pcs.**
Nut driver.

Blade: Chrome-vanadium-molybdenum steel, through-hardened, electro-plated.
Adjustable blade lengths.

Handle: SYSTEM 6 SoftFinish®-telescopic handle.
ClickStop ball clamp guarantees secure hold and a quick nut driver change.

Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.					
27712 3	U106 T8				1
	284	SYSTEM 6 SoftFinish®-telescopic handle			
		5.0	5.5	6.0	7.0
		8.0	10.0	13.0	

U106 T12 **SYSTEM 6 nut driver set, 12 pcs.**
Nut driver.

Blade: Chrome-vanadium-molybdenum steel, through-hardened, electro-plated.
Adjustable blade lengths.

Handle: SYSTEM 6 SoftFinish®-telescopic handle.
ClickStop ball clamp guarantees secure hold and a quick nut driver change.

Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.					
27713 0	U106 T12				1
	284	SYSTEM 6 SoftFinish®-telescopic handle			
		4.0	4.5	5.0	5.5
		6.0	7.0	8.0	9.0
		10.0	11.0	13.0	

Wiha SYSTEM 4.

Ideal for precision work.

Colour-coded ChromTop® tips for maximum clarity.

Due to its versatility and quality the Wiha **SYSTEM 4** is a reversible blade system that convinces every user. Either for slotted, Phillips, TORX® or hex screws, the wide product range provides the right model for every application. All reversible blades are made of high-quality CVM-steel, through hardened and chrome-plated, which provides an extra long service-life.

The Wiha ChromTop® tips guarantee a perfect fit every time. Just choose from the SYSTEM 4 products for the relevant tool. Following handles are offered.

- The ergonomic **SoftFinish® telescopic handle.**
- The dissipative **SoftFinish® ESD handle.**

Each with adjustable blade lengths from 18 – 90 mm.

We offer SYSTEM 4 sets in compact roll-up pouches, rugged metal and easy access plastic boxes.

Convincing variety and quality. SYSTEM 4 – a real multi-tasker.

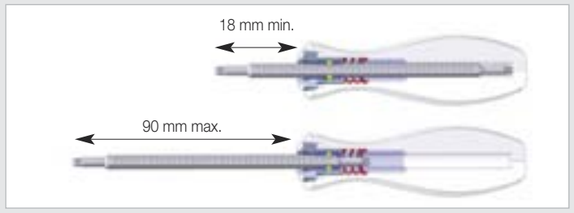

With the SoftFinish® telescopic handle, the blade length can be adjusted from 18 – 90 mm.

Wiha SYSTEM 4.

- Flexible, versatile reversible precision blade system
- Sets in compact roll-up pouches, rugged metal- or easy access plastic-boxes
- Ergonomic handles for almost every application
- Colour-coded blades made of high-quality, tough chrome-vanadium-molybdenum steel, through-hardened, chrome-plated
- Wiha ChromTop® tips ensure a perfect fit every time

Wiha SYSTEM 4.

Ideal for precision work.

SYSTEM 4 handles.

2691 **SYSTEM 4 SoftFinish®-telescopic handle.**
Ergonomic multi-component handle with roll-off protection.

Handle: With 4 mm hex retainer for all SYSTEM 4 blades.
Enables adjustable blade lengths from 18 - 90 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.

Application: Ideal for all precision work in the fields of electronics and mechanics.

Order-No.				
30373 0	**4.0**	**105**	23	10

2691ESD **SYSTEM 4 SoftFinish®-telescopic ESD handle.**
Dissipative handle, ESD-safe.

Handle: Ergonomic multi-component handle with roll-off protection.
With 4 mm hex retainer for all SYSTEM 4 blades.
Enables adjustable blade lengths from 18 - 90 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Surface resistance 10^6 - 10^9 ohms.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.				
31498 9	**4.0**	**105**	23	10

Safety Notice:
Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.

SYSTEM 4 reversible blades.

269 **SYSTEM 4 slotted reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.							
00576 4	**1.5**	**3.0**	0.25	0.5	120	4.0	5
00577 1	**2.0**	**3.5**	0.4	0.6	120	4.0	5
00578 8	**2.5**	**4.0**	0.4	0.8	120	4.0	5

269 **SYSTEM 4 slotted Phillips reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.						
00601 3	**2.0**	**PH00**	0.4	120	4.0	5
00602 0	**3.0**	**PH0**	0.5	120	4.0	5
00603 7	**4.0**	**PH1**	0.8	120	4.0	5

269 **SYSTEM 4 Phillips reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.					
00579 5	**PH000**	**PH00**	120	4.0	5
00580 1	**PH0**	**PH1**	120	4.0	5

269 **SYSTEM 4 Pozidriv reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.					
03186 2	**PZ0**	**PZ1**	120	4.0	5

SYSTEM 4 reversible blades.

269 **SYSTEM 4 TORX® reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Order-No.					
26122 1	**T1**	**T2**	120	4.0	5
26123 8	**T3**	**T4**	120	4.0	5
26124 5	**T5**	**T6**	120	4.0	5
00597 9	**T6**	**T8**	120	4.0	5
00598 6	**T7**	**T9**	120	4.0	5
00599 3	**T10**	**T15**	120	4.0	5
00600 6	**T15**	**T20**	120	4.0	5

269 **SYSTEM 4 combined ball end hex - hex reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips.

Extra: The ball end enables the user to work at angles up to 25°.

Order-No.					
00582 5	**1.3**	**1.3**	120	4.0	5
00583 2	**1.5**	**1.5**	120	4.0	5
00584 9	**2**	**2**	120	4.0	5
00585 6	**2.5**	**2.5**	120	4.0	5
00586 3	**3**	**3**	120	4.0	5
00587 0	**4**	**4**	120	4.0	5

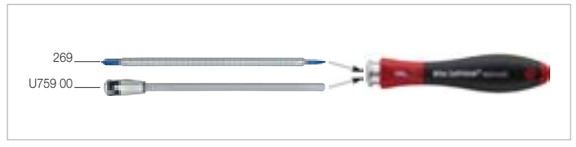

Practical and compact: select the appropriate blade – insert it into the handle – that's all there is to it!

SYSTEM 4 reversible blades.

269 **SYSTEM 4 nut driver.**
For hex nuts.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Application: For hex nuts.

Order-No.					
00588 7	**1.5**	**1.8**	120	4.0	5
00589 4	**2**	**2.5**	120	4.0	5
00590 0	**3**	**-**	120	4.0	5
00591 7	**3.2**	**-**	120	4.0	5
00592 4	**3.5**	**-**	120	4.0	5
00593 1	**4**	**-**	120	4.0	5
00594 8	**4.5**	**-**	120	4.0	5
00595 5	**5**	**-**	120	4.0	5
00596 2	**5.5**	**-**	120	4.0	5

U759 00 **SYSTEM 4 bit holder.**
Suitable for C 4 (4 mm) bits.

Blade: Chrome-vanadium steel, through hardened, electro-plated.

Order-No.					
09195 8	**4.0**	**135**	4.0	9	1

Wiha SYSTEM 4.

Ideal for precision work.

SYSTEM 4 sets in pouches.

Telescopic

269 T4 **SYSTEM 4 reversible blades set, 4 pcs.**
Slotted/ Phillips.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 18 - 90 mm.
Handle: SYSTEM 4 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
00613 6	269 T4				10
	2691	SYSTEM 4 SoftFinish®-telescopic handle			
	269	2.0 - PH00	3.0 - PH0	4.0 - PH1	

SYSTEM 4 sets in pouches.

Telescopic

269 T11 **SYSTEM 4 reversible blades set, 11 pcs.**
Slotted/ Phillips/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 18 - 90 mm.
Handle: SYSTEM 4 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
00610 5	269 T11				5
	2691	SYSTEM 4 SoftFinish®-telescopic handle			
	269	1.5 - 3.0	2.0 - 3.5	2.5 - 4.0	
	269	PH000 - PH00	PH0 - PH1		
	269	1.3 - 1.3	1.5 - 1.5	2 - 2	
		2.5 - 2.5	3 - 3		

SYSTEM 4 sets in pouches.

Telescopic

269 T11 01 **SYSTEM 4 reversible blades set, 11 pcs.**
Slotted/ Phillips/ TORX®/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 18 - 90 mm.
Handle: SYSTEM 4 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
27820 5	269 T11 01				5
	2691	SYSTEM 4 SoftFinish®-telescopic handle			
	269	1.5 - 3.0	2.0 - 3.5	2.5 - 4.0	
	269	PH000 - PH00	PH0 - PH1		
	269	T6 - T8	T7 - T9		
	269	1.5 - 1.5	2 - 2	2.5 - 2.5	

SYSTEM 4 sets in plastic boxes.

Telescopic

269 EB53 **SYSTEM 4 reversible blades set, 5 pcs.**
Slotted/ Phillips.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 18 - 90 mm.
Handle: SYSTEM 4 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Ideal for all precision work.
Extra: Delivery in a rugged, arrangable plastic box.

Order-No.	Series			
32317 2	269 EB53			5
	2691	SYSTEM 4 SoftFinish®-telescopic handle		
	269	1.5 - 3.0	2.0 - 3.5	
	269	PH000 - PH00	PH0 - PH1	

Telescopic

269 T6 **SYSTEM 4 reversible blades set, 6 pcs.**
Slotted/ Phillips.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 18 - 90 mm.
Handle: SYSTEM 4 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
00616 7	269 T6				5
	2691	SYSTEM 4 SoftFinish®-telescopic handle			
	269	1.5 - 3.0	2.0 - 3.5	2.5 - 4.0	
	269	PH000 - PH00	PH0 - PH1		

Telescopic

269 T6 01 **SYSTEM 4 reversible blades set, 6 pcs.**
Phillips/ TORX®.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 18 - 90 mm.
Handle: SYSTEM 4 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series				
26121 4	269 T6 01				5
	2691	SYSTEM 4 SoftFinish®-telescopic handle			
	269	PH000 - PH00	PH0 - PH1		
	269	T3 - T4	T5 - T6	T8 - T10	

Press sleeve:
=> Blade locking is released

Press and hold down sleeve:
=> Set desired blade length

Release sleeve:
=> Blade is held securely

Telescopic

269 EB95 **SYSTEM 4 reversible blades set, 9 pcs.**
Slotted/ Phillips/ TORX®.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Colour-coded Wiha ChromTop® tips. Blade length is adjustable from 18 - 90 mm.
Handle: SYSTEM 4 SoftFinish®-telescopic handle. ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Ideal for all precision work.
Extra: Delivery in a rugged, arrangable plastic box.

Order-No.	Series				
32316 5	269 EB95				5
	2691	SYSTEM 4 SoftFinish®-telescopic handle			
	269	1.5 - 3.0	2.0 - 3.5	2.5 - 4.0	
	269	PH000 - PH00	PH0 - PH1		
	269	T6 - T8	T7 - T9	T10 - T15	

Wiha L-keys.

Wiha makes it possible: Perfect technic for professional work.

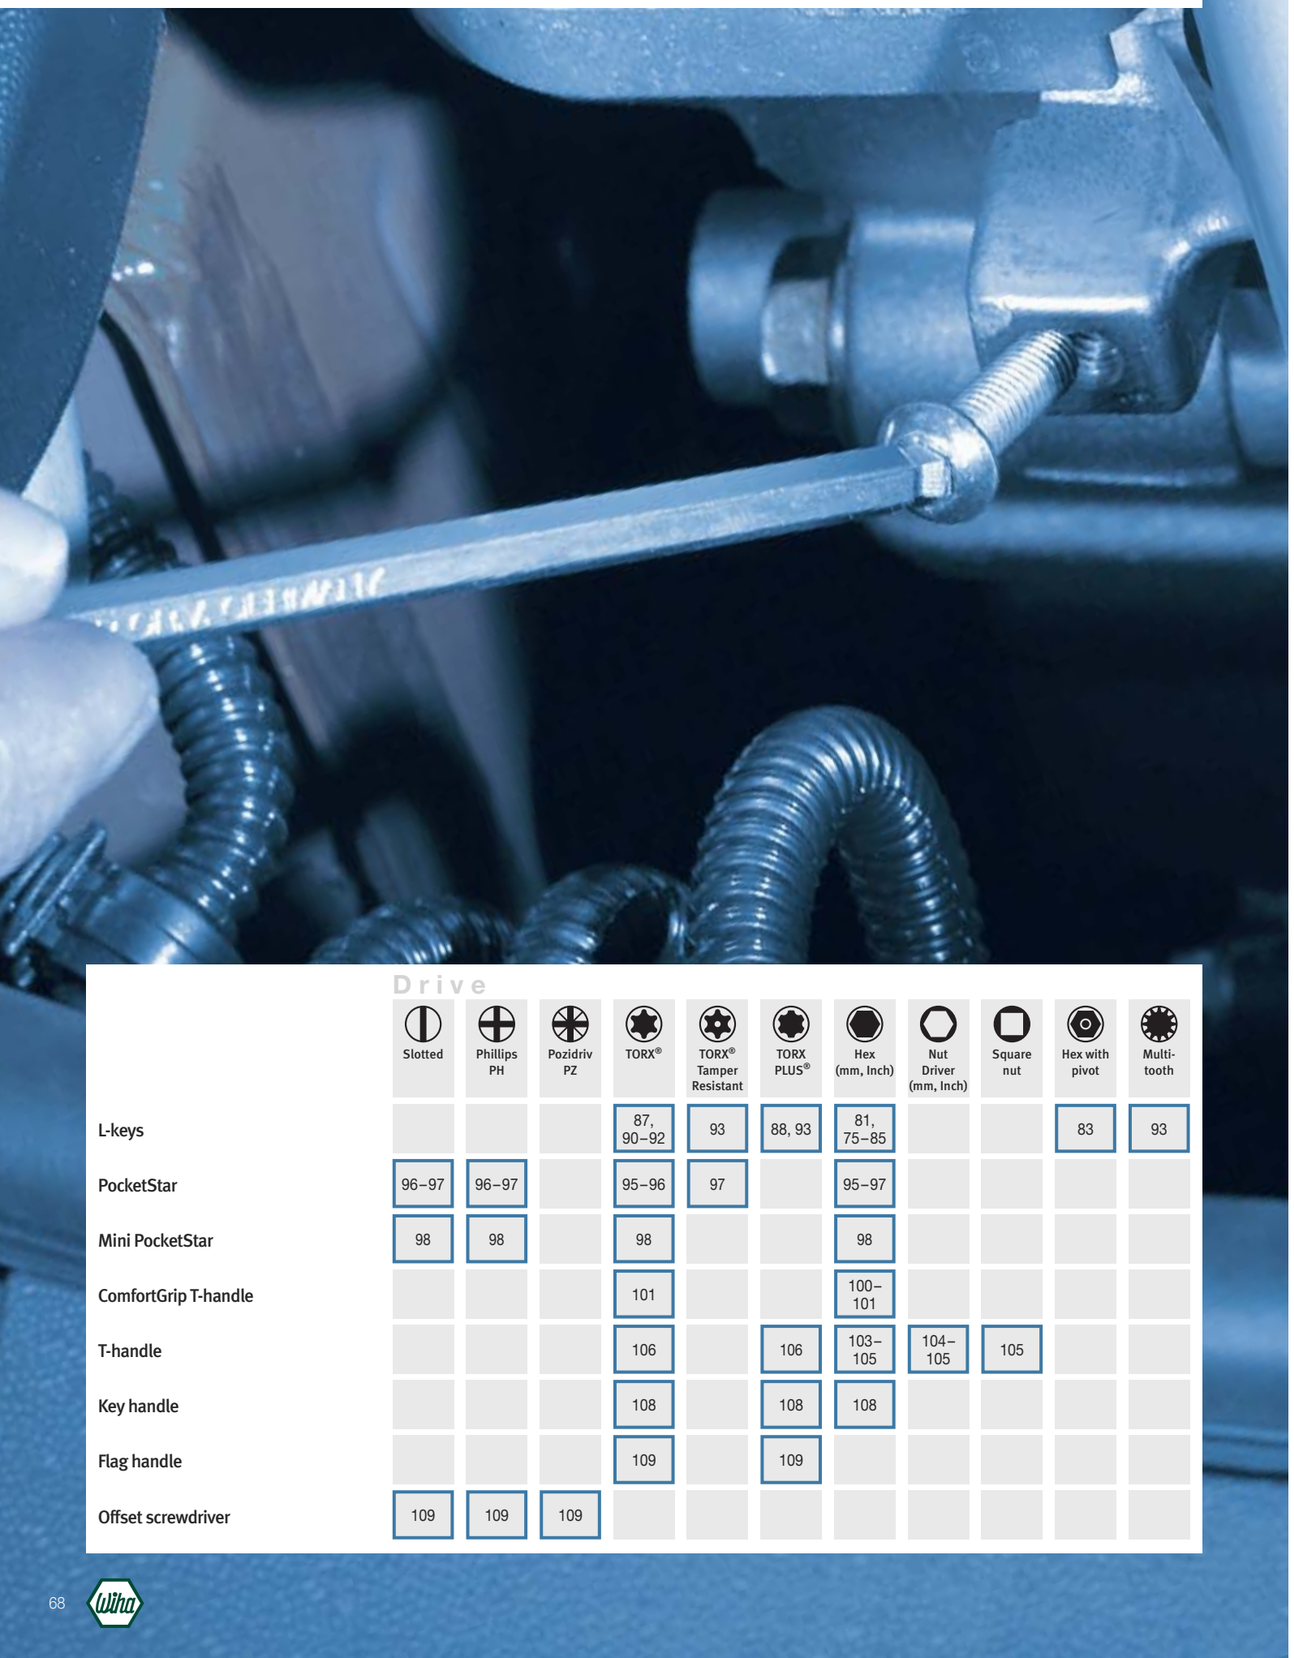

	Drive										
	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®	Hex (mm, Inch)	Nut Driver (mm, Inch)	Square nut	Hex with pivot	Multi-tooth
L-keys				87, 90–92	93	88, 93	81, 75–85			83	93
PocketStar	96–97	96–97		95–96	97		95–97				
Mini PocketStar	98	98		98			98				
ComfortGrip T-handle				101			100–101				
T-handle				106		106	103–105	104–105	105		
Key handle				108		108	108				
Flag handle				109		109					
Offset screwdriver	109	109	109								

Hex L-keys range

NEW

Wiha ErgoStar.
He's fastening on to something good. ..... 70 – 71

Wiha hex L-keys with MagicRing®.
Hold screws perfectly in every position. 72

Wiha ProStar.
Sliding function for correct key selection. 73
Hex L-keys with MagicRing® in ProStar. ..... 75 – 76

Wiha system holder.
Ingenious solution for everyday use. 74

Hex L-keys. Metric sizes. ..... 77 – 83

Hex L-keys with pivot. Metric sizes. 83

NEW

Hex L-keys, colour-coded. Metric sizes. 85

Hex L-keys. Inch sizes. ..... 84 – 85

Wiha MagicSpring®.
Holds TORX®- and TORX PLUS® screws securely in place. ..... 86 – 88

Wiha TORX® ball end.
Simpler, more powerful, safer. ..... 89 – 90

TORX® L-keys. ..... 91 – 92

TORX® Tamper Resistant L-keys. 93

TORX PLUS® L-keys. 93

XZN® L-keys. 93

Wiha PocketStar.
Press one button for the correct key. ..... 94 – 97

Wiha Mini PocketStar.
The smallest blade at the push of a button. 98

Wiha ComfortGrip T-handle.
Soft zones for maximum working comfort. ..... 99 – 101

Wiha T-handle.
The classic for high torques. 102

T-handle with hex and square blades. Metric sizes. ..... 103 – 105

T-handle with hex blade. Inch sizes. 105

T-handle with TORX® and TORX PLUS® blades. 106

Wiha flag and key handle.
The knack of applying just the right amount of pressure. 107

Key handles with hex, TORX® and TORX PLUS® blades. 108

Flag handles with TORX® and TORX PLUS® blades. 109

Offset screwdrivers with slotted, Phillips and Pozidriv blades. 109

Wiha VDE T-handles
See VDE tool range, page 231

Wiha stainless steel L-keys
See stainless steel tool range, page 300

Wiha ErgoStar.

He's fastening on to something good.

reddot design award
winner 2010

A WORLD FIRST

Extremely agile:
the new ball end now enables fastenings up to an angle of 30°.

The trick with the new Wiha ErgoStar is as simple as it is effective: rotating a single L-key in the holder means that all other keys rotate to the side at the same angle! That means: there's no more complicated disentangling of adjacent keys any more. All L-keys are ready for removal with a single turn, quicker, more simply and more clearly than ever before.

But easy removal is not the only advantage. The set of Wiha premium L-keys from the series 369S is also included. With the new ball end design, screws can be effortlessly fastened even at an angle up to 30°. Through-hardened, chrome vanadium steel and high quality brilliant chroming are further convincing reasons that make the L-keys essential accessories for everyday work.

The right idea:
a flowing movement means all L-keys are ready for removal.

Wiha ErgoStar.

- **All at once**
  Simple key extraction
- **A firm hold**
  With innovative clamping and a solid stopping point
- **Small and handy**
  Fits everywhere
- **Agile**
  Also for fastenings up to an angle of 30°
- **High torque**
  Thanks to improved ball end geometry
- **Clearly recognisable**
  Lasered L-key size designations bring clarity

Wall holder for practical storage of the Wiha ErgoStar: all keys always ready to hand.
Available together with the Wiha ErgoStar in all display and blister pack versions.

For Allen screws (metric).

NEW
369S **Ball end hex L-key, long.**

Blade: Chrome vanadium steel, through-hardened, brilliant chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: The ball end enables fastening and unfastening at an angle of up to 30°.

Order-No.	◉	↔	↕	
34755 0	1.5	91	15	10
34756 7	2	101	18	10
34757 4	2.5	113	20	10
34758 1	3	128	23	10
34759 8	4	142	29	10
34760 4	5	163	33	10
34761 1	6	184	38	10
34762 8	8	206	44	10
34763 5	10	231	50	5

For Allen screws (metric).

NEW
369 H9S **Ball end hex L-key set in holder.**
Brilliant chrome-plated, 9 pcs.

Blade: Chrome vanadium steel, through-hardened, brilliant chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Mechanical operation of the space-saving holder makes simplest removal of each individual L-key possible without movement of the others.
The ball end enables fastening and unfastening at an angle of up to 30°.

Order-No.			
34753 6	369 H9S		5
	◉	369S	1.5 2 2.5 3 4 5 6 8 10

NEW
SB 369 H9S **Ball end hex L-key set in holder.**
Brilliant chrome-plated, 9 pcs.
Blister packed.

Order-No.			
34754 3	SB 369 H9S		5
	◉	369S	1.5 2 2.5 3 4 5 6 8 10

NEW
369 HVH1S **Display ball end hex L-key sets.**
Brilliant chrome-plated, 9 pcs.
Carton display with 5 pieces.

Order-No.	Content	◉	
34764 2	5 x 369 H9S	1.5 - 10	1

Wiha MagicRing® hexagon L-key.

Securely holds hexagon bolts in place in any position.

MagicRing®
holds all standard screws!

- *DIN 6912*
- *DIN 7984*
- *DIN EN ISO 4762*
- *DIN EN ISO 10642*
- *DIN EN ISO 4026*
- *DIN EN ISO 4027*
- *DIN EN ISO 4028*
- *DIN EN ISO 4029*
- *DIN EN ISO 7380*

Wiha hex keys with MagicRing® guarantee the perfect location of hex screws in every position.

Due to a high-quality retaining ring in the key head, the insertion of a screw in straight, inclined or very deep pocket holes is no problem. The new ball geometry with MagicRing® now offers even more advantages:

- Greater retention force for screws. For example, size 6 holds screws up to 1000 mm in length.
- Enlarged maximum torque of up to 10% due to the new ball geometry.
- Can now be used with all standard screws.

A further advantage is that the Wiha MagicRing® can even be used to hold non-magnetisable screws made of stainless steel, titanium and aluminium.

Thanks to the Wiha MagicRing®, inserting and removing screws is safe and easy, even in areas that are difficult to access.

Wiha MagicRing® metric is only available as long design from size 3. With the inch dimensions, MagicRing® is available from 1/8". All series are made from highquality chrome-vanadium steel.

The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

Wiha MagicRing® hexagon L-key.

- Suitable for removing sunk-head standard screws and for inserting and working screws in horizontal, inclined of deep pocket holes
- Holds screws made of steel and non-magnetisable materials such as stainless steel, titanium and aluminium
- Ideal for applications where there is insufficient space for a simple hex key
- No troublesome searching for dropped screws

Wiha ProStar.

Sliding function for correct key selection.

Practical bolster plate for all small keys.

With ProStar, it is possible to open the holder with only one hand thanks to the new sliding mechanism and the tool thus offers maximum-comfort working.

The optimum user benefit is manifested in the unique mechanism, which can be used to remove each key individually without having to move any of the other keys.

Thanks to the compact design, the ProStar takes up little space on the bench or in the toolbox.



Push red upper part to the right.

Tip the required key forwards...



...and take it out.

Wiha ProStar.

- New sliding mechanism for opening the holder with only one hand
- Quick removal of each individual key without having to move another key
- Compact design saves space on the bench and in the toolbox
- High-quality plastic material, impact-resistant, cadmium free
- New colour-coding system for immediate identification:

Red upper part: 9 sizes in metric dimensions

Yellow upper part: 13 sizes in inches

Green upper part: 13 TORX® keys

Wiha system holder.

Ingenious solution for everyday use.

Wiha system holders feature innovative details for maximum user benefit.

A general colour-coding system for all system holders ensures clarity.

Wiha ErgoStar

The trick with the new Wiha ErgoStar is as simple as it is effective: rotating a single L-key in the holder means that all other keys rotate to the side at the same angle! That means: there's no more complicated disentangling of adjacent keys any more. All L-keys are ready for removal with a single turn, quicker, more simply and more clearly than ever before.

Wiha ProStar

The Wiha ProStar with sliding function means it is possible to open the holder with only one hand. Simply push the coloured upper part to the right and all sizes are clearly available at a glance.

The main advantage is that each key can be individurally removed and later replaced without having to move the other keys. That saves time, keeps the workplace tidy and thus enhances everyday efficiency.

Wiha Holder

The Wiha holder arranges all L-keys next to each other, which means that each key is easily identifiable at a glance.
The integrated hanging hole is particularly practical for shop storage on the wall after work is finished.

The Wiha universal L-key holder in addition allows simple, quick operation with a solid stopping point for the keys

Wiha Sliding Box

A practical sliding box for the Wiha L-keys is available to protect against the influx of dirt.

Wiha MagicRing® hexagon L-key.

Securely holds hexagon bolts in place in any position.

For Allen screws (metric).

369R **Ball end hex L-key, long.**
With MagicRing®.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws tight at various angles (available from 3 mm).
The ball end enables the user to work at angles up to 25°.

Order-No.	◉	↔	↕	
20549 2	3	128	23	10
20550 8	4	142	29	10
20570 6	5	163	33	10
20551 5	6	184	38	10
20552 2	8	206	44	10
20553 9	10	231	50	5

369R S9 **Ball end hex L-key set in ProStar.**
With MagicRing®, chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.
MagicRing® made from spring steel holds all standard screws tight at various angles (available from 3 mm).
The ball end enables the user to work at angles up to 25°.

Order-No.							
20709 0	369R S9						5
◉	369	1.5	2	2.5			
◉	369R	3	4	5	6	8	10

SB 369R S9 **Ball end hex L-key set in ProStar.**
With MagicRing®, chrome-plated, 9 pcs.
Blister packed.

Order-No.							
20712 0	SB 369R S9						5
◉	369	1.5	2	2.5			
◉	369R	3	4	5	6	8	10

Display.

369R SVH1 **Display ball end hex L-key sets.**
With MagicRing®, chrome-plated, in ProStar, 9 pcs.
Carton display with 10 pieces.

Order-No.	Content	◉	
23265 8	10 x 369R S9	1.5 - 10	1

Wiha Info

Colour-coding system:

- **red:** metric hex blades
- **yellow:** inch hex blades
- **green:** TORX® blades
- **light green:** TORX PLUS® blades

Wiha MagicRing® hexagon L-key.

Securely holds hexagon bolts in place in any position.

For Allen screws (inch).

369R Zoll **Ball end hex L-key, long.**
With MagicRing®. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ASME B18.3.
Application: Insert hex inch screws into and remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws tight at various angles (available from 1/8").
The ball end enables the user to work at angles up to 25°.

Order-No.	◉	⟷	↕	mm	
29471 7	0.05	72	13	1.27	10
29472 4	1/16	80	15	1.59	10
29474 8	5/64	88	18	1.98	10
29473 1	3/32	101	20	2.38	10
29475 5	7/64	111	21	2.78	10
24302 9	1/8	121	23	3.17	10
24304 3	9/64	136	27	3.57	10
24303 6	5/32	148	29	3.96	10
24305 0	3/16	163	33	4.76	10
24306 7	7/32	176	36	5.55	10
24307 4	1/4	191	38	6.35	10
24308 1	5/16	210	43	7.93	10
24341 8	3/8	232	50	9.52	10

For Allen screws (inch).

369R SZ13 **Ball end hex L-key set in ProStar.**
With MagicRing®, chrome-plated, 13 pcs.
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ASME B18.3.
Application: Insert hex inch screws into and remove from boreholes, especially in difficult to access areas.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.
MagicRing® made from spring steel holds all standard screws tight at various angles (available from 1/8").
The ball end enables the user to work at angles up to 25°.

Order-No.									
24190 2	369R SZ13							5	
◉	369 Zoll C	0.05	1/16	5/64	3/32	7/64			
◉	369R Zoll	1/8	9/64	5/32	3/16	7/32	1/4	5/16	3/8

SB 369R SZ13 **Ball end hex L-key set in ProStar.**
With MagicRing®, chrome-plated, 13 pcs.
Inch sizes.
Blister packed.

Order-No.									
24850 5	SB 369R SZ13							5	
◉	369 Zoll C	0.05	1/16	5/64	3/32	7/64			
◉	369R Zoll	1/8	9/64	5/32	3/16	7/32	1/4	5/16	3/8

Wiha Info

Wiha MagicRing®:

spring steel ring
reliably holds hex screws in place.

Wiha hex L-keys (metric).

For Allen screws (metric).

369 **Ball end hex L-key, long.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	◉	⟷	↕	
01392 9	1.5	91	15	10
01393 6	2	101	18	10
01395 0	2.5	113	20	10
01396 7	3	128	23	10
01398 1	4	142	29	10
01400 1	5	163	33	10
01402 5	6	184	38	10
07922 2	7	195	39	5
01404 9	8	206	44	10
01406 3	10	231	50	5
01408 7	12	259	57	5

SB 369 **Ball end hex L-key, long.**
Blister packed.

Order-No.	◉	⟷	↕	
08161 4	1.5	91	15	10
08162 1	2	101	18	10
08163 8	2.5	113	20	10
08164 5	3	128	23	10
08165 2	4	142	29	10
08166 9	5	163	33	10
08167 6	6	184	38	10
08168 3	8	206	44	5
08169 0	10	231	50	5
08170 6	12	259	57	5

For Allen screws (metric).

369 S9 **Ball end hex L-key set in ProStar.**
Chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.
The ball end enables the user to work at angles up to 25°.

Order-No.										
07185 1	369 S9									5
◉	369	1.5	2	2.5	3	4	5	6	8	10

SB 369 S9 **Ball end hex L-key set in ProStar.**
Chrome-plated, 9 pcs.
Blister packed.

Order-No.										
07192 9	SB 369 S9									5
◉	369	1.5	2	2.5	3	4	5	6	8	10

369 SVH1 **Display ball end hex L-key sets.**
Chrome-plated, in ProStar, 9 pcs.
Carton display with 10 pieces.

Order-No.	Content	◉	
07194 3	10 x 369 S9	1.5 - 10	1

Wiha hex L-keys (metric).

For Allen screws (metric).

369 H9 **Ball end hex L-key set in holder.**
Chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Thanks to its compact dimensions, this holder fits easily into every ruler pocket.
Popular key sizes kept in a well-organised holder.
The ball end enables the user to work at angles up to 25°.

Order-No.											
01418 6	369 H9										5
◉	369	1.5	2	2.5	3	4	5	6	8	10	

SB 369 H9 **Ball end hex L-key set in holder.**
Chrome-plated, 9 pcs.
Blister packed.

Order-No.											
02292 1	SB 369 H9										5
◉	369	1.5	2	2.5	3	4	5	6	8	10	

For Allen screws (metric).



369 B8 **Ball end hex L-key set in sliding box.**
Chrome-plated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Large, impact resistant sliding box.
The ball end enables the user to work at angles up to 25°.

Order-No.										
01410 0	369 B8									5
◉	369	2	2.5	3	4	5	6	8	10	

369 H7 **Ball end hex L-key set in holder.**
Chrome-plated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
The ball end enables the user to work at angles up to 25°.

Order-No.								
01416 2	369 H7							5
◉	369	1.5	2	2.5	3	4	5	6

SB 369 H7 **Ball end hex L-key set in holder.**
Chrome-plated, 7 pcs.
Blister packed.

Order-No.								
03723 9	SB 369 H7							5
◉	369	1.5	2	2.5	3	4	5	6

369B **Ball end hex L-key, long.**

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	◉			
01391 2	1.3	74	14	10
05638 4	1.5	91	15	10
03868 7	2	101	18	10
03869 4	2.5	113	20	10
03870 0	3	128	23	10
03871 7	4	142	29	10
03872 4	5	163	33	10
03873 1	6	184	38	10
03874 8	8	206	44	10
03875 5	10	231	50	5
03876 2	12	259	57	5

For Allen screws (metric).

369 S9B **Ball end hex L-key set in ProStar.**
Manganese-phosphated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.
The ball end enables the user to work at angles up to 25°.

Order-No.										
07186 8	369 S9B									5
◉	369B	1.5	2	2.5	3	4	5	6	8	10

SB 369 S9B **Ball end hex L-key set in ProStar.**
Manganese-phosphated, 9 pcs.
Blister packed.

Order-No.										
07193 6	SB 369 S9B									5
◉	369B	1.5	2	2.5	3	4	5	6	8	10

369 SVH1B **Display ball end hex L-key sets.**
Manganese-phosphated, in ProStar, 9 pcs.
Carton display with 10 pieces.

Order-No.	Content	◉	
07195 0	10 x 369 S9B	1.5 - 10	1

For Allen screws (metric).

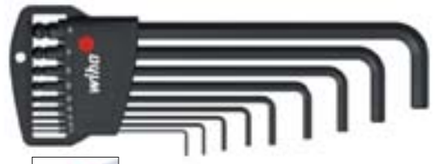

369 H9B **Ball end hex L-key set in holder.**
Manganese-phosphated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
The ball end enables the user to work at angles up to 25°.

Order-No.										
03879 3	369 H9B									5
◉	369B	1.5	2	2.5	3	4	5	6	8	10

SB 369 H9B **Ball end hex L-key set in holder.**
Manganese-phosphated, 9 pcs.
Blister packed.

Order-No.										
03992 9	SB 369 H9B									5
◉	369B	1.5	2	2.5	3	4	5	6	8	10



NEW
369 H7B **Ball end hex L-key set in holder.**
Manganese-phosphated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
The ball end enables the user to work at angles up to 25°.

Order-No.								
03878 6	369 H7B							5
◉	369B	1.5	2	2.5	3	4	5	6

NEW
SB 369 H7B **Ball end hex L-key set in holder.**
Manganese-phosphated, 7 pcs.
Blister packed.

Order-No.								
03991 2	SB 369 H7B							5
◉	369B	1.5	2	2.5	3	4	5	6

Wiha hex L-keys (metric).

For Allen screws (metric).

352 Hex L-key, long.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ISO 2936L.

Order-No.	◉	⟷	↕	
01201 4	1.5	91	15	10
01202 1	2	101	18	10
01203 8	2.5	113	20	10
01204 5	3	128	23	10
01206 9	4	142	29	10
01207 6	5	163	33	10
01208 3	6	184	38	10
01209 0	7	194	41	5
01210 6	8	206	44	10
01211 3	10	231	50	5
01212 0	12	259	57	5
01213 7	14	291	70	5
01214 4	17	333	80	5
01215 1	19	375	89	5

352 S9 Hex L-key set in ProStar.
Nickel-plated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ISO 2936L.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.

Order-No.		
07181 3	352 S9	5
◉	352	1.5 2 2.5 3 4 5 6 8 10

SB 352 S9 Hex L-key set in ProStar.
Nickel-plated, 9 pcs.
Blister packed.

Order-No.		
07190 5	SB 352 S9	5
◉	352	1.5 2 2.5 3 4 5 6 8 10

For Allen screws (metric).

352 H9 Hex L-key set in holder.
Nickel-plated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ISO 2936L.
Extra: Thanks to its compact dimensions, this holder fits easily into every ruler pocket.
Popular key sizes kept in a well-organised holder.

Order-No.		
01222 9	352 H9	5
◉	352	1.5 2 2.5 3 4 5 6 8 10

352 H7 Hex L-key set in holder.
Nickel-plated, 7 pcs.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ISO 2936L.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.		
01220 5	352 H7	5
◉	352	1.5 2 2.5 3 4 5 6



352 B8 Hex L-key set in sliding box.
Nickel-plated, 8 pcs.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ISO 2936L.
Extra: Large, impact resistant sliding box.

Order-No.		
01216 8	352 B8	5
◉	352	2 2.5 3 4 5 6 8 10

For Allen screws (metric).

352B Hex L-key, long.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.

Order-No.	◉	⟷	↕	
06358 0	0.7	67	6	5
06359 7	0.9	70	9	5
06360 3	1.3	80	13	5
06059 6	1.5	91	15	5
06361 0	2	101	18	5
06362 7	2.5	113	20	5
06363 4	3	128	23	5
06364 1	4	142	29	10
06365 8	5	163	33	10
06366 5	6	184	38	10
06367 2	7	194	41	5
06368 9	8	206	44	10
06369 6	10	231	50	5
06370 2	12	259	57	5
06371 9	14	291	70	5

Wiha Info

Colour-coding system:

- **red:** metric hex blades
- **yellow:** inch hex blades
- **green:** TORX® blades
- **light green:** TORX PLUS® blades

For Allen screws (metric).

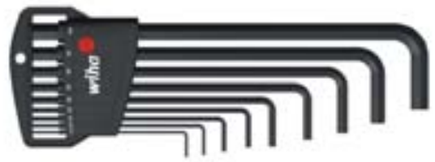

352 H9B Hex L-key set in holder.
Manganese-phosphated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.		
06386 3	352 H9B	5
◉	352B	1.5 2 2.5 3 4 5 6 8 10



NEW
352 H7B Hex L-key set in holder.
Manganese-phosphated, 7 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.		
06384 9	352 H7B	5
◉	352B	1.5 2 2.5 3 4 5 6



352 HM5B Hex L-key set in holder.
Manganese-phosphated, 5 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.		
06382 5	352 HM5B	10
◉	352B	0.7 0.9 1.3 1.5 2

Wiha hex L-keys (metric).

For Allen screws (metric).

351 **Hex L-key, short.**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: ISO 2936K.

Order-No.	◉			
01144 4	1.5	46	15	10
01145 1	2	51	18	10
01146 8	2.5	57	20	10
01147 5	3	64	23	10
01148 2	3.5	70	26	5
01149 9	4	72	29	10
01150 5	4.5	80	31	5
01151 2	5	83	33	10
01152 9	5.5	90	35	5
01153 6	6	94	38	10
01154 3	7	99	41	5
01155 0	8	105	44	10
01156 7	9	114	47	5
01157 4	10	119	50	5
01158 1	11	129	53	5
01159 8	12	134	57	5
01160 4	14	151	70	5
01161 1	17	173	80	5
01162 8	19	195	89	5

351 H9 **Hex L-key set in holder.**
Nickel-plated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: ISO 2936K.
Extra: Thanks to its compact dimensions, this holder fits easily into every ruler pocket.
Popular key sizes kept in a well-organised holder.

Order-No.										
01174 1	351 H9									10
◉	351	1.5	2	2.5	3	4	5	6	8	10

SB 351 H9 **Hex L-key set in holder.**
Nickel-plated, 9 pcs.
Blister packed.

Order-No.										
03734 5	SB 351 H9									5
◉	351	1.5	2	2.5	3	4	5	6	8	10

For Allen screws (metric).

351 H7 **Hex L-key set in holder.**
Nickel-plated, 7 pcs.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: ISO 2936K.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.								
01172 7	351 H7							10
◉	351	1.5	2	2.5	3	4	5	6



351 B8 **Hex L-key set in sliding box.**
Nickel-plated, 8 pcs.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: ISO 2936K.
Extra: Small, impact resistant sliding box.

Order-No.								
01166 6	351 B8							10
◉	351	2	2.5	3	4	5	6	8	10

351 R8 **Hex L-key set on keyring.**
Nickel-plated, 8 pcs. In plastic pouch.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: ISO 2936K.
Extra: Flexible hanging of all keys on a keyring.

Order-No.									
01180 2	351 R8								10
◉	351	2	2.5	3	4	5	6	8	10

For Allen screws (metric).

351 VB **Hex L-key set in bench stand.**
Nickel-plated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: ISO 2936K.
Extra: Robust metal workbench holder to place on workbench or wall-mount.
Tip diagrams printed to scale.

Order-No.										
01182 6	351 VB									1
◉	351	2.5	3	4	5	6	8	10	12	14

359 **Hex L-key with pivot.**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: DIN 6911.
Application: Fits hex socket screws with low head and centre hole.
With key guidance according to DIN 6912.

Order-No.	◎			
01255 7	3	64	23	10
01256 4	4	72	29	10
01257 1	5	83	33	10
01258 8	6	94	38	10
01259 5	8	105	44	10
01260 1	10	119	50	5
01261 8	12	134	57	5
01262 5	14	151	70	5
01263 2	17	173	80	5

For Allen screws (metric).

350 **Hex L-key, short.**
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: ISO 2936K.

Order-No.	◉			
06218 7	1.3	41	13	10
01121 5	1.5	46	15	10
01122 2	2	51	18	10
01123 9	2.5	57	20	10
01124 6	3	64	23	10
01126 0	4	72	29	10
01128 4	5	83	33	10
01130 7	6	94	38	10
01131 4	7	99	41	10
01132 1	8	105	44	10
01133 8	9	112	47	5
01134 5	10	119	50	5
01135 2	11	126	53	5
01136 9	12	134	57	5
01137 6	14	151	70	5
01138 3	17	173	80	5
01139 0	19	195	89	5
01140 6	22	217	102	1
01141 3	24	241	114	1
01142 0	27	271	127	1
01143 7	32	339	157	1

350 H9 **Hex L-key set in holder.**
Manganese-phosphated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: ISO 2936K.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.										
06379 5	350 H9									10
◉	350	1.5	2	2.5	3	4	5	6	8	10

NEW
350 H7 **Hex L-key set in holder.**
Manganese-phosphated, 7 pcs.

Order-No.								
06378 8	350 H7							10
◉	350	1.5	2	2.5	3	4	5	6

Wiha hex L-keys (inch).

For Allen screws (inch).

369 Zoll **Ball end hex L-key, long.**
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ASME B18.3.
Application: Especially for inch-sized screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	◉			mm	
01422 3	0.05	72	13	1.27	10
01423 0	1/16	80	15	1.59	10
01431 5	5/64	88	18	1.98	10
01427 8	3/32	101	20	2.38	10
01433 9	7/64	111	21	2.78	10
01425 4	1/8	121	23	3.18	10
01434 6	9/64	136	27	3.57	10
01430 8	5/32	148	29	3.97	10
01426 1	3/16	163	33	4.76	10
01432 2	7/32	176	36	5.56	10
01424 7	1/4	191	38	6.35	10
01429 2	5/16	210	43	7.94	10
01428 5	3/8	232	50	9.53	5

For Allen screws (inch).

369 SZ13B **Ball end hex L-key set in ProStar.**
Manganese-phosphated, 13 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ASME B18.3.
Application: Especially for inch-sized screws that are difficult to access.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.

Order-No.								
24189 6	369 SZ13B							5
◉	369 Zoll	0.05	1/16	5/64	3/32	7/64	1/8	9/64
		5/32	3/16	7/32	1/4	5/16	3/8	

SB 369 SZ13B **Ball end hex L-key set in ProStar.**
Manganese-phosphated, 13 pcs. Inch sizes.
Blister packed.

Order-No.								
24851 2	SB 369 SZ13B							5
◉	369 Zoll	0.05	1/16	5/64	3/32	7/64	1/8	9/64
		5/32	3/16	7/32	1/4	5/16	3/8	

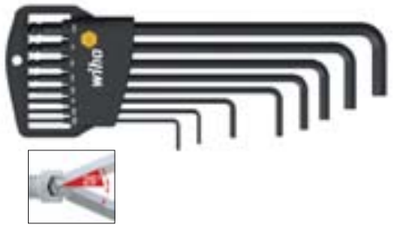

369 HZ8 **Ball end hex L-key set in holder.**
Manganese-phosphated, 8 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ASME B18.3.
Application: Especially for inch-sized screws that are difficult to access.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.									
01420 9	369 HZ8							5	
◉	369 Zoll	5/64	3/32	1/8	5/32	3/16	7/32	1/4	5/16

SB 369 HZ8 **Ball end hex L-key set in holder.**
Manganese-phosphated, 8 pcs. Inch sizes.
Blister packed.

Order-No.									
02939 5	SB 369 HZ8							5	
◉	369 Zoll	5/64	3/32	1/8	5/32	3/16	7/32	1/4	5/16

For Allen screws (inch).

351 Zoll **Hex L-key, short. Inch sizes.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ASME B18.3.
Application: For all popular inch screws.

Order-No.	◉			mm	
25626 5	0.05	41	13	1.27	10
01184 0	1/16	47	16	1.59	10
01194 9	5/64	51	18	1.98	10
01189 5	3/32	55	22	2.38	10
22406 6	7/64	58	21	2.78	10
01187 1	1/8	61	23	3.18	10
01200 7	9/64	65	25	3.57	10
01193 2	5/32	72	29	3.97	10
01188 8	3/16	76	30	4.76	10
01197 0	7/32	84	34	5.56	10
01186 4	1/4	94	37	6.35	10
01192 5	5/16	106	43	7.94	10
01191 8	3/8	117	48	9.53	5
01185 7	1/2	143	59	12.70	5
01198 7	9/16	158	64	14.29	5
01195 6	5/8	176	71	15.88	5
01190 1	3/4	198	89	19.05	5

351 SZ13 **Hex L-key set in ProStar.**
Nickel-plated, 13 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ASME B18.3.
Application: For all popular inch screws.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.

Order-No.									
25610 4	351 SZ13							5	
◉	351 Zoll	41	1/16	5/64	3/32	7/64	1/8	9/64	
		5/32	3/16	7/32	1/4	5/16	3/8		

351 HZ8 **Hex L-key set in holder.**
Nickel-plated, 8 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ASME B18.3.
Application: For all popular inch screws.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.									
01176 5	351 HZ8							10	
◉	351 Zoll	5/64	3/32	1/8	5/32	3/16	7/32	1/4	5/16

For Allen screws (metric).

NEW

369F **Ball end hex L-key, long.**

Blade: Chrome vanadium steel, through-hardened, colour-coded.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.
Colour coding for immediate identification of L-keys.

Order-No.	◉				
34269 2	1.5	91	15	black	10
34270 8	2	101	18	green	10
34271 5	2.5	113	20	turquoise	10
34272 2	3	128	23	light blue	10
34273 9	4	142	29	purple	10
34274 6	5	163	33	red	10
34275 3	6	184	38	orange	10
34276 0	8	206	44	yellow	10
34277 7	10	231	50	grey	5

NEW

369 H9F **Ball end hex L-key set in holder.**

Blade: Chrome vanadium steel, through-hardened, colour-coded.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
The ball end enables the user to work at angles up to 25°.
Colour coding for immediate identification of L-keys.

Order-No.										
34268 5	369 H9F									5
◉	369F	1.5	2	2.5	3	4	5	6	8	10

Wiha TORX® MagicSpring®.

Holds TORX® and TORX PLUS® screws securely in place.

Wiha MagicSpring®:
stainless steel spring reliably holds TORX® or TORX PLUS® screws in place.

No more annoying and time-consuming hunting around for TORX® or TORX PLUS® screws that have apparently vanished into thin air. With Wiha's ingenious new tool, the MagicSpring®, TORX® or TORX PLUS® screws* are kept firmly where you want them. The highlight of the "MagicSpring®" tools is the stainless steel "magical" retaining spring that, together with a thin cover disc, is laser-welded to the tip of the blade.

This completely new innovation acts as a clamp between tool and TORX® or TORX PLUS® screw, so that the latter is firmly gripped by the tip of the blade. The new tools are especially beneficial when turning particularly small screws or when turning screws in areas that are difficult to access. Simply place the screw on the tip of the blade and start to turn. No more screws will fall to the ground or disappear between components.

Thanks to Wiha's MagicSpring®, inserting and removing TORX® and TORX PLUS® screws is safe and easy.

** TORX® or TORX PLUS® screws manufactured acc. to Camcar Textron specifications.*

As the clamping action is purely mechanical, MagicSpring® also gets a firm grip on TORX® or TORX PLUS® screws made of aluminium, stainless steel, plastic and titanium.

The retaining spring is a completely new technical solution that, together with a thin cover disc, is laser-welded to the tip of the blade.

Wiha TORX® MagicSpring®.

- MagicSpring® retaining spring made of stainless steel gets a firm hold on every TORX® or TORX PLUS® screw
- No more annoying searching for dropped screws
- Ideal for areas that are difficult to access
- Made of high-quality materials in the renowned Wiha quality
- Also suitable for TORX® or TORX PLUS® screws made of aluminium, stainless steel, plastic and titanium

For TORX® screws.

366R TORX® MagicSpring® L-key, long.
Retaining spring holds TORX® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For setting and tightening TORX® screws in difficult to access areas.

Order-No.					
31233 6	T6	80	15	1/16	10
31234 3	T7	88	18	5/64	10
31235 0	T8	101	20	3/32	10
31236 7	T9	111	21	7/64	10
31237 4	T10	121	23	1/8	10
31238 1	T15	136	27	9/64	10
31239 8	T20	148	29	5/32	10
31240 4	T25	163	33	3/16	10
31241 1	T27	176	36	7/32	10
31242 8	T30	191	38	1/4	10
31243 5	T40	210	43	5/16	10
31244 2	T45	232	50	3/8	10

366R SZ13 TORX® MagicSpring® L-key set in ProStar, 13 pcs.
Retaining spring holds TORX® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For setting and tightening TORX® screws in difficult to access areas.
Extra: Makes simple removal of each individual key possible without movement of the others.

Order-No.										
31492 7	366R SZ13									5
	366	T5								
	366R	T6	T7	T8	T9	T10	T15	T20	T25	
		T27	T30	T40	T45					

SB 366R SZ13 TORX® MagicSpring® L-key set in ProStar, 13 pcs.
Blister packed.

Order-No.										
31923 6	SB 366R SZ13									5
	366	T5								
	366R	T6	T7	T8	T9	T10	T15	T20	T25	
		T27	T30	T40	T45					

For TORX® screws.

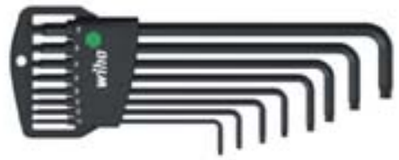

NEW
366R H8 TORX® MagicSpring® L-key set in holder, 8 pcs.
Retaining spring holds TORX® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For setting and tightening TORX® screws in difficult to access areas.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.										
34740 6	366R H8									5
	366R	T9	T10	T15	T20	T25	T27	T30	T40	

NEW
SB 366R H8 TORX® MagicSpring® L-key set in holder, 8 pcs.
Retaining spring holds TORX® screws in place.
Blister packed.

Order-No.										
34741 3	SB 366R H8									5
	366R	T9	T10	T15	T20	T25	T27	T30	T40	



366R HM7 TORX® MagicSpring® L-key set in holder, 7 pcs.
Retaining spring holds TORX® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For setting and tightening TORX® screws in difficult to access areas.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.									
33753 7	366R HM7								5
	366R	T6	T7	T8	T9	T10	T15	T20	

SB 366R HM7 TORX® MagicSpring® L-key set in holder, 7 pcs.
Retaining spring holds TORX® screws in place.
Blister packed.

Order-No.									
33754 4	SB 366R HM7								5
	366R	T6	T7	T8	T9	T10	T15	T20	

Wiha TORX PLUS® MagicSpring®.

Holds TORX PLUS® screws securely in place.

For TORX PLUS® screws.

371RIP **TORX PLUS® L-key.**
With MagicSpring®.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX PLUS® screw tasks.
Extra: MagicSpring® made from stainless steel holds TORX PLUS®-screws tight at various angles.
The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.					
29197 6	6IP	65	16	1/16	10
29198 3	7IP	71	18	5/64	10
29199 0	8IP	77	20	3/32	10
29200 3	9IP	83	22	7/64	10
29201 0	10IP	90	24	1/8	10
29202 7	15IP	97	26	9/64	10
29203 4	20IP	104	29	5/32	10
29204 1	25IP	112	33	3/16	10
29205 8	27IP	122	36	7/32	10
29206 5	30IP	132	40	1/4	10
29207 2	40IP	143	44	5/16	10

For TORX PLUS® screws.

NEW

371RIP H8 **TORX PLUS® MagicSpring® L-key set in holder, 8 pcs.**
Retaining spring holds TORX PLUS® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX PLUS® screw tasks.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
MagicSpring® made from stainless steel holds TORX PLUS®-screws tight at various angles.

Order-No.			
34742 0	371RIP H8		5
	371RIP	9IP 10IP 15IP 20IP 25IP 27IP 30IP 40IP	

371RIP HM7 **TORX PLUS® MagicSpring® L-key set in holder, 7 pcs.**
Retaining spring holds TORX PLUS® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX PLUS® screw tasks.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
MagicSpring® made from stainless steel holds TORX PLUS®-screws tight at various angles.

Order-No.			
29208 9	371RIP HM7		5
	371RIP	6IP 7IP 8IP 9IP 10IP 15IP 20IP	

Wiha Info

Wiha MagicSpring®:

stainless steel spring
reliably holds TORX® or
TORX PLUS® screws in place.

Wiha TORX® ball end.

Simpler, more powerful, safer.

Plenty of room to manoeuvre: The ball end enables access to the TORX® screw at an angle of up to 25°.

Tight spaces that only allow fastening and unfastening in at an angle: In these "problem zones" for TORX® screws, Wiha TORX® ball end tools are in demand. The advantages for the user are obvious: With the improved geometry of the ball end, TORX® screws can now be screwed in and out even at angles up to 25°. As a result, maximum torques are no longer a problem even in difficult installation positions. Wearing of the tool and screw head is noticeably reduced.

And Wiha is also pursuing a different path in production. Thanks to an innovative manufacturing process, cold forming, the TORX® ball end gains a great deal of strength.

So that these advantages benefit a broad range of applications, the Wiha TORX® ball end is integrated in several types of tools and is available in proven Wiha quality:

- as an L-key in sizes T9 to T40, separately or as a set with a holder
- as a bit with the lengths 50, 70 and 90 mm
- as a screwdriver with the ergonomic SoftFinish® handle, through-hardened, brushed chrome-plated blade and precision-fitting ChromTop® blade tip

Thanks to their ruggedness, flexibility and diversity, Wiha TORX® ball end tools are indispensable for any user who has to depend on a long tool life under difficult working conditions.

With elongated TORX® profile behind ball end.

Wiha TORX® ball end.

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose
- Enables fastening and unfastening at angles of 25°
- Simple insertion of the tool/bit and fastening/unfastening, especially in hard-to-reach locations
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver

Wiha TORX® ball end L-keys.

For TORX® screws.

366BE **TORX® ball head L-key, long.**

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all hard-to-reach TORX® screws.
Extra: The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.					
32386 8	T9	111	21	7/64	10
32387 5	T10	121	23	1/8	10
32388 2	T15	136	27	9/64	10
32389 9	T20	148	29	5/32	10
32390 5	T25	163	33	3/16	10
32391 2	T27	176	36	7/32	10
32392 9	T30	191	38	1/4	10
32393 6	T40	210	43	5/16	10
33749 0	T45	232	50	-	10
33750 6	T50	232	50	-	10

For TORX® screws.

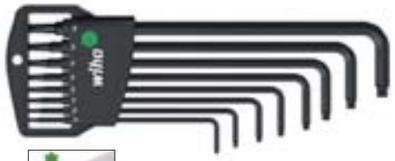

366BE H8 **Ball end TORX® L-key set in holder.**
Manganese-phosphated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all hard-to-reach TORX® screws.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.									
32394 3	366BE H8								5
	366BE	T9	T10	T15	T20	T25	T27	T30	T40

SB 366BE H8 **Ball end TORX® L-key set in holder.**
Manganese-phosphated, 8 pcs.
Blister packed.

Order-No.									
32395 0	SB 366BE H8								5
	366BE	T9	T10	T15	T20	T25	T27	T30	T40

366BE SZ13 **TORX® ball end L-key set in ProStar.**
Manganese-phosphated, 13 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all hard-to-reach TORX® screws.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.										
33751 3	366BE SZ13									5
	366	T5	T6	T7	T8					
	366BE	T9	T10	T15	T20	T25	T27	T30	T40	T45

SB 366BE SZ13 **TORX® ball end L-key set in ProStar.**
Manganese-phosphated, 13 pcs.
Blister packed.

Order-No.										
33752 0	SB 366BE SZ13									5
	366	T5	T6	T7	T8					
	366BE	T9	T10	T15	T20	T25	T27	T30	T40	T45

Wiha TORX® L-keys.

For TORX® screws.

366 **TORX® L-key, long.**

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications.

Order-No.					
24313 5	T5	72	13	0.05	10
24314 2	T6	80	15	1/16	10
24315 9	T7	88	18	5/64	10
24316 6	T8	101	20	3/32	10
24317 3	T9	111	21	7/64	10
24318 0	T10	121	23	1/8	10
24319 7	T15	136	27	9/64	10
24320 3	T20	148	29	5/32	10
24321 0	T25	163	33	3/16	10
24322 7	T27	176	36	7/32	10
24323 4	T30	191	38	1/4	10
24324 1	T40	210	43	5/16	10
24325 8	T50	232	50	3/8	10

366 SZ13 **TORX® L-key set in ProStar.**
Manganese-phosphated, 13 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.
All keys from T5 to T50 in one set.

Order-No.										
24312 8	366 SZ13									5
	366	T5	T6	T7	T8	T9	T10	T15		
		T20	T25	T27	T30	T40	T50			

SB 366 SZ13 **TORX® L-key set in ProStar.**
Manganese-phosphated, 13 pcs.
Blister packed.

Order-No.										
24852 9	SB 366 SZ13									5
	366	T5	T6	T7	T8	T9	T10	T15		
		T20	T25	T27	T30	T40	T50			

For TORX® screws.

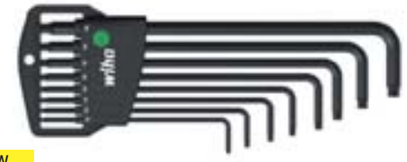

NEW

366 H8 **TORX® L-key set in holder.**
Manganese-phosphated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.										
34736 9	366 H8									5
	366	T9	T10	T15	T20	T25	T27	T30	T40	

NEW

SB 366 H8 **TORX® L-key set in holder.**
Manganese-phosphated, 8 pcs.
Blister packed.

Order-No.										
34737 6	SB 366 H8									5
	366	T9	T10	T15	T20	T25	T27	T30	T40	



NEW

366 H7 **TORX® L-key set in holder.**
Manganese-phosphated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.									
34738 3	366 H7								5
	366	T6	T7	T8	T9	T10	T15	T20	

NEW

SB 366 H7 **TORX® L-key set in holder.**
Manganese-phosphated, 7 pcs.
Blister packed.

Order-No.									
34739 0	SB 366 H7								5
	366	T6	T7	T8	T9	T10	T15	T20	

Wiha TORX® L-keys.

For TORX® screws.

363 TORX® L-key, short.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications in confined work spaces.

Order-No.					
03764 2	T5	39	18	2.5	10
01310 3	T6	41	18	2.5	10
01311 0	T7	44	18	2.5	10
01312 7	T8	47	18	2.5	10
01313 4	T9	51	19	3.0	10
01314 1	T10	54	20	3.0	10
01315 8	T15	57	22	3.5	10
01316 5	T20	62	23	4.0	10
01317 2	T25	67	25	4.5	10
01318 9	T27	72	27	5.5	10
01319 6	T30	79	30	6.0	10
01320 2	T40	86	33	7.0	10
01321 9	T45	90	36	8.0	10
01322 6	T50	104	41	9.0	10
01323 3	T55	120	47	12.0	10
01324 0	T60	134	52	14.0	10

363 VB TORX® L-key set in bench stand.
Manganese-phosphated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications in confined work spaces.
Extra: Robust metal workbench holder to place on workbench or wall-mount. Tip diagrams printed to scale.

Order-No.								
01326 4	363 VB							1
	363	T10	T15	T20	T25	T30	T40	
		T50	T55	T60				

For TORX® screws.

363 H9 TORX® L-key set in holder.
Manganese-phosphated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications in confined work spaces.
Extra: Popular key sizes kept in a well-organised holder.

Order-No.								
06376 4	363 H9							5
	363	T8	T9	T10	T15	T20	T25	
		T27	T30	T40				

SB 363 H9 TORX® L-key set in holder.
Manganese-phosphated, 9 pcs.
Blister packed.

Order-No.								
27554 9	SB 363 H9							5
	363	T8	T9	T10	T15	T20	T25	
		T27	T30	T40				

363 HM7 TORX® L-key set in holder.
Manganese-phosphated, 7 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications in confined work spaces.
Extra: Popular key sizes kept in a well-organised holder.

Order-No.								
06375 7	363 HM7							5
	363	T6	T7	T8	T9	T10	T15	
		T20						

363 H6 TORX® L-key set in holder.
Manganese-phosphated, 6 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all TORX® screw applications in confined work spaces.
Extra: Popular key sizes kept in a well-organised holder.

Order-No.								
06374 0	363 H6							5
	363	T15	T20	T25	T27	T30	T40	

Wiha L-keys.

For TORX® Tamper Resistant screws.

363TR TORX® Tamper Resistant L-key, short.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For popular TORX® Tamper Resistant screws (with security pin).
Extra: Borehole in every blade tip.

Order-No.					
24105 6	T7H	44	18	2.5	10
24107 0	T8H	47	18	2.5	10
24109 4	T9H	51	19	3.0	10
24111 7	T10H	54	20	3.0	10
24113 1	T15H	57	22	3.5	10
24115 5	T20H	62	23	4.0	10
24117 9	T25H	67	25	4.5	10
24119 3	T27H	72	27	5.5	10
24121 6	T30H	79	30	6.0	10
24123 0	T40H	86	33	7.0	10

363TR H9 TORX® Tamper Resistant L-key set in holder.
Manganese-phosphated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For popular TORX® Tamper Resistant screws (with security pin).
Extra: Popular key sizes kept in a well-organised holder.
Borehole in every blade tip.

Order-No.								
25608 1	363TR H9							5
	363TR	T8H	T9H	T10H	T15H	T20H	T25H	
		T27H	T30H	T40H				

SB 363TR H9 TORX® Tamper Resistant L-key set in holder.
Manganese-phosphated, 9 pcs.
Blister packed.

Order-No.								
27555 6	SB 363TR H9							5
	363TR	T8H	T9H	T10H	T15H	T20H	T25H	
		T27H	T30H	T40H				

Wiha Info

Colour-coding system:

- **red:** metric hex blades
- **yellow:** inch hex blades
- **green:** TORX® blades
- **light green:** TORX PLUS® blades

For TORX PLUS® and XZN® multipoint socket screws.

361IP TORX PLUS® L-key, short.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For popular TORX PLUS® screws.
Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.					
24513 9	6IP	41	18	2.5	10
24515 3	7IP	44	18	2.5	10
24517 7	8IP	47	18	2.5	10
24519 1	9IP	51	19	3.0	10
24521 4	10IP	54	20	3.0	10
24523 8	15IP	58	22	3.5	10
24525 2	20IP	62	23	4.0	10
24527 6	25IP	67	25	4.5	10
24529 0	27IP	73	27	5.5	10
24531 3	30IP	79	30	6.0	10
24533 7	40IP	88	33	7.0	10

361IP H9 TORX PLUS® L-key set in holder.
Manganese-phosphated, 9 pcs.
Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For popular TORX PLUS® screws.
Extra: Popular key sizes kept in a well-organised holder.
Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.								
26246 4	361IP H9							5
	361IP	8IP	9IP	10IP	15IP	20IP	25IP	
		27IP	30IP	40IP				

355 XZN® L-key, short.
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Application: For XZN® multipoint socket screws.

Order-No.				
01243 4	M5	76	30	10
01244 1	M6	86	34	10
01245 8	M8	98	38	10
01246 5	M10	110	46	10
01247 2	M12	124	52	10
01248 9	M14	138	58	10
01249 6	M16	156	71	10

Wiha PocketStar.

Press one button for the correct key.

The unique opening mechanism facilitates an easy selection of the desired key size.

The Wiha PocketStar fold out offers optimum handling and a wide variety of uses, which are expressed in the form of many practical details.

The ingenious opening mechanism facilitates the simple selection of the required key size from the glass-fibre-reinforced holder.

Wiha solved an important demand of fold-out users: When turning a key into working position only this one moves. The remaining keys stay where they are.

The various working positions offer universal use:

- In the 180° position, the PocketStar is used as a screwdriver.
- 270° stop limit for using the tool as practical lever for high torques.
- Any position can be set between 90° and 270° for a variety of different work applications.

The 270° stop limit when working on applications with higher safety requirements puts an end to trapped fingers.

All it takes is three swift actions and you have an effective screwdriver: Pull it out of the pouch, press on the button and set the desired blade to 180° as well as 270°.

Wiha PocketStar.

- Innovative opening mechanism for simple selection of the desired key size
- Particulary suitable for use as screwdriver when the blade axis is set at 180° or as practical lever with blade in 270° position
- Ergonomic, glass-fibre-reinforced holder guarantees the easy transfer of even the highest torques
- Can be rotated by any angle between 270° and 90° to save time when working on applications where space is tight
- 270° stop limit for higher safety puts an end to trapped fingers
- Colour-coding system for different drives and dimensional systems delivers great clarity when using several PocketStars
- Covered hex key axes prevents catching on clothes

For Allen screws (metric).

369R P7 **Ball end hex fold out holder PocketStar.**
With MagicRing®, in large PocketStar, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
Application: Practical fold out holder for hex screws in the workplace or on the job. Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: Robust casing with eject button for simple and easy key selection. MagicRing® made from spring steel holds all standard screws tight at various angles (available from 3 mm). The ball end enables the user to work at angles up to 25°.

Order-No.		
23031 9	369R P7	5
	2 2.5 3 4 5 6 8	

SB 369R P7 **Ball end hex fold out holder PocketStar.**
With MagicRing®, in large PocketStar, 7 pcs.
Blister packed with hanging hole.

Order-No.		
23033 3	SB 369R P7	5

For Allen screws (metric).

351 PG7 **Hex fold out holder PocketStar.**
In large PocketStar, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
Application: Practical fold out holder for hex screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.		
23040 1	351 PG7	5
	2 2.5 3 4 5 6 8	

SB 351 PG7 **Hex fold out holder PocketStar.**
In large PocketStar, 7 pcs.
Blister packed with hanging hole.

Order-No.		
23041 8	SB 351 PG7	5

351 PK7 **Hex fold out holder PocketStar.**
In small PocketStar, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 95 mm long.
Application: Practical fold out holder for hex screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.		
23035 7	351 PK7	5
	1.5 2 2.5 3 4 5 6	

SB 351 PK7 **Hex fold out holder PocketStar.**
In small PocketStar, 7 pcs.
Blister packed with hanging hole.

Order-No.		
23037 1	SB 351 PK7	5

Wiha Info

Colour-coding system:

- **red:** metric hex blades
- **yellow:** inch hex blades
- **green:** TORX® blades
- **light green:** TORX PLUS® blades

Wiha PocketStar.

Press one button for the correct key.

Mixed sets.

351 PG9X Fold out holder PocketStar containing assorted keys.
In large PocketStar, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
Application: Practical fold out holder for hex, slotted, Phillips and TORX® screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.		
25293 9	351 PG9X	5
	4.5	
	PH2	
	T10 T15 T20	
	3 4 5 6	

SB 351 PG9X Fold out holder PocketStar containing assorted keys.
In large PocketStar, 9 pcs.
Blister packed with hanging hole.

Order-No.		
25295 3	SB 351 PG9X	5

351 PK6X Fold out holder PocketStar containing assorted keys.
In small PocketStar, 6 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 95 mm long.
Application: Practical fold out holder for hex, slotted and Phillips screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.		
24859 8	351 PK6X	5
	5.5	
	PH2	
	3 4 5 6	

SB 351 PK6X Fold out holder PocketStar containing assorted keys.
In small PocketStar, 6 pcs.
Blister packed with hanging hole.

Order-No.		
24861 1	SB 351 PK6X	5

For TORX® screws.

363 P8 TORX® fold out holder PocketStar.
In large PocketStar, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
Application: Practical fold out holder for TORX® screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.		
23047 0	363 P8	5
	T9 T10 T15 T20	
	T25 T27 T30 T40	

SB 363 P8 TORX® fold out holder PocketStar.
In large PocketStar, 8 pcs.
Blister packed with hanging hole.

Order-No.		
23049 4	SB 363 P8	5

363 P7 TORX® fold out holder PocketStar.
In small PocketStar, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 95 mm long.
Application: Practical fold out holder for TORX® screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.		
23051 7	363 P7	5
	T7 T8 T9 T10	
	T15 T20 T25	

SB 363 P7 TORX® fold out holder PocketStar.
In small PocketStar, 7 pcs.
Blister packed with hanging hole.

Order-No.		
23053 1	SB 363 P7	5

For TORX® Tamper Resistant screws.

363TR P8 TORX® Tamper Resistant fold out holder PocketStar.
In large PocketStar, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
Application: Practical fold out holder for TORX® Tamper Resistant (with security pin) screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection. Borehole in every blade tip.

Order-No.		
25130 7	363TR P8	5
	T9H T10H T15H T20H	
	T25H T27H T30H T40H	

SB 363TR P8 TORX® Tamper Resistant fold out holder PocketStar.
In large PocketStar, 8 pcs.
Blister packed with hanging hole.

Order-No.		
25166 7	SB 363TR P8	5

363TR P7 TORX® Tamper Resistant fold out holder PocketStar.
In small PocketStar, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 95 mm long.
Application: Practical fold out holder for TORX® Tamper Resistant (with security pin) screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection. Borehole in every blade tip.

Order-No.		
25128 4	363TR P7	5
	T7H T8H T9H T10H	
	T15H T20H T25H	

SB 363TR P7 TORX® Tamper Resistant fold out holder PocketStar.
In small PocketStar, 7 pcs.
Blister packed with hanging hole.

Order-No.		
25164 2	SB 363TR P7	5

Displays.

351 PG7 VH1 Display hex fold out holder PocketStar.
In large PocketStar, 7 pcs.
Carton display with 10 pieces.

Order-No.	Content		
23502 4	10 x 351 PG7	2 - 8	1

351 PG9X VH1 Display fold out holder PocketStar containing assorted keys.
In large PocketStar, 9 pcs.
Carton display with 10 pieces.

Order-No.	Content	
25297 7	10 x 351 PG9X	1

363 P8 VH1 Display TORX® fold out holder PocketStar.
In large PocketStar, 8 pcs.
Carton display with 10 pieces.

Order-No.	Content		
23503 1	10 x 363 P8	T9 - T40	1

Wiha Mini PocketStar.

The smallest blade at the push of a button.



The unique opening mechanism facilitates an easy selection of the desired key size.

Who hasn't spent ages looking for the small SW 0.9 hex key or for other small keys?

Wiha has developed an extremely smart solution to solve exactly this problem: the Mini PocketStar, a small practical helper that is an absolute must in the toolbox of every service and customer-service engineer.

Regardless of whether replacing a proximity switch or pneumatic control unit, or whether adjusting the sensitivity of a light barrier. With the Mini PocketStar, all keys are within reach.

Small but effective.
The Mini PocketStar from Wiha is the smart helper for service engineers and for DIY use.

The 180° stop limit when working on applications with higher safety requirements puts an end to trapped fingers.

Wiha Mini PocketStar.

- All small keys are held together in the Mini PocketStar. Not a single blade is lost
- Each of the 8 blades can be used as screwdriver when set at 180° and as tool with lever arm when set at 90°
- The glass-fibre-reinforced polyamide holder ensures that the Mini PocketStar withstands every stress unscathed
- Of course, the smallest PocketStar also has the same special functions as the "big" PocketStars

Mixed sets.

SB 351 PM8X **Hex fold out holder Mini PocketStar.**
With additional blades, 8 pcs.
Blister packed.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 55 mm long.
Application: Practical fold out holder for mini keys so they no longer get lost. Particularly suitable for use with the smallest screws, e.g. when tightening screws or for the accurate setting of sensors.
Extra: Robust casing with eject button for simple and easy key selection. Hanging loop with matching snap-hook.

Order-No.		
27936 3	SB 351 PM8X	5
	0.7 0.9 1.3 1.5 2.0	
	1.5 2.0	
	PH00	

Mixed sets.

SB 363 PM8X **TORX® fold out holder Mini PocketStar.**
With additional blades, 8 pcs.
Blister packed.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 55 mm long.
Application: Practical fold out holder for mini keys so they no longer get lost. Particularly suitable for use with the smallest screws, e.g. when tightening screws or for the accurate setting of sensors.
Extra: Robust casing with eject button for simple and easy key selection. Hanging loop with matching snap-hook.

Order-No.		
27939 4	SB 363 PM8X	5
	T4 T5 T6 T7	
	1.5 2.0	
	PH00	
	2.0	

Wiha ComfortGrip T-handle.

Soft zones for maximum working comfort.

Side blade with through blade.

The new Wiha T-handle with through blade for additional side blade features soft zones for the comfortable transmission of high torques.

Due to their ergonomic design, these handles are comfortable to hold. Fewer pressure points and less strain on the user mean that these tools are a pleasure to use.

When using the side blade, a supporting hand on the handle produces additional stability, which prevents the blade from suddenly slipping out of the screw head. This is better for both blade and screw.

The hole in the handle can be used for shop storage.

No screw can resist. The powerful Wiha ComfortGrip is quick and comfortable to use and even loosens screws that have been glued into position.

A tool that is a pleasure to use. Using the side blade for even greater torque, a supporting hand stabilises the handle and prevents the blade from slipping.

Black soft zones in the handle for comfortable working.

Chrome-plated blade for optimum corrosion protection.

Wiha ComfortGrip T-handle.

- The integrated side blade is particularly useful when loosening or tightening screws that are rusted-in, glued into position or particularly hard to move
- The through blade withstands even the highest stresses
- Distinctive soft zones on the ergonomic handle for the comfortable transmission of even high torques
- Handle-size concept with three handle shapes designed for maximum ease of use and for applying just the right amount of torque
- The new colour-coding system for the handles couldn't be clearer:
  Red: metric hex blades
  Green: TORX® profiles
- Matt chrome-plated blades guarantee optimum corrosion protection and a long service life for the whole blade

Wiha ComfortGrip T-handle.

Soft zones for maximum working comfort.

For Allen screws (metric).

NEW

540DS **Hexagon ball end screwdriver with ComfortGrip.**
With side blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
Application: For comfortable high torque transfer.
Especially useful for loosening or tightening screws that are hard to move.
Specially for hard-to-reach screws.
Extra: One piece blade, through the handle withstands even the highest stresses.
The ball end enables the user to work at angles up to 25°.

Order-No.						
28372 8	3	150	13	80	26	10
28373 5	4	150	13	80	26	10
28374 2	5	150	17	100	32	10
28375 9	6	150	17	100	32	10
28376 6	8	200	17	100	32	10
28377 3	10	200	22	120	38	10

For Allen screws (metric).

334DS **Hex driver with ComfortGrip.**
With side blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
Application: For comfortable high torque transfer.
Especially useful for loosening or tightening screws that are hard to move.
Extra: One piece blade, through the handle withstands even the highest stresses.

Order-No.						
26164 1	2	100	13	80	26	10
26165 8	2.5	100	13	80	26	10
26166 5	3	100	13	80	26	10
26167 2	4	150	13	80	26	10
26168 9	5	150	17	100	32	10
26169 6	6	150	17	100	32	10
26170 2	8	200	17	100	32	10
26171 9	10	200	22	120	38	10

For TORX® screws.

364DS **TORX® driver with ComfortGrip.**
With side blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
Application: For comfortable high torque transfer.
Especially useful for loosening or tightening screws that are hard to move.
Extra: One piece blade, through the handle withstands even the highest stresses.
ChromTop® blade tip for the highest accuracy at both ends.

Order-No.						
26172 6	T10	100	13	80	26	10
26173 3	T15	100	13	80	26	10
26174 0	T20	100	17	100	32	10
26175 7	T25	150	17	100	32	10
26176 4	T27	150	17	100	32	10
26177 1	T30	150	17	100	32	10
26178 8	T40	150	17	100	32	10

Sets.

334DS K6 **Hex driver set with ComfortGrip, 6 pcs.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
Application: For comfortable high torque transfer and to insert and remove screws from holes.
Especially useful for loosening or tightening screws that are hard to move.
Extra: One piece blade, through the handle withstands even the highest stresses.
ChromTop® blade tip for the highest accuracy at both ends.
6 common sizes in set packaging.

Order-No.		
26247 1	334DS K6	1
	334DS 2.5 3 4 5 6 8	

334DSR **Hex driver with ComfortGrip.**
With MagicRing® and side blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
Application: For comfortable high torque transfer and to insert and remove screws from holes.
Especially useful for loosening or tightening screws that are hard to move.
Extra: MagicRing® made from spring steel holds all standard screws tight at various angles (available from 3 mm).
One piece blade, through the handle withstands even the highest stresses.

Order-No.						
26135 1	3	100	13	80	26	10
26136 8	4	150	13	80	26	10
26137 5	5	150	17	100	32	10
26138 2	6	150	17	100	32	10
26139 9	8	200	17	100	32	10
26140 5	10	200	22	120	38	10

NEW

334D **Hex driver with ComfortGrip.**

Blade: Chrome vanadium steel, through-hardened, nickel-plated.
Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
Application: For high torque transfer with minimal effort.

Order-No.						
34664 5	2	100	126	80	26	10
34665 2	2.5	100	126	80	26	10
34666 9	3	100	126	80	26	10
34667 6	3	150	176	80	26	10
34668 3	4	100	126	80	26	10
34669 0	4	150	176	80	26	10
34670 6	5	100	132	100	32	10
34671 3	5	150	182	100	32	10
34672 0	5	200	232	100	32	10
34673 7	6	100	132	100	32	10
34674 4	6	150	182	100	32	10
34675 1	6	200	232	100	32	10
34676 8	8	150	182	100	32	10
34677 5	8	200	232	100	32	10
34678 2	10	200	238	120	38	10

NEW

364D **TORX® driver with ComfortGrip.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
Application: For high torque transfer with minimal effort.
Extra: ChromTop® blade tip for the highest accuracy.

Order-No.						
34679 9	T10	100	126	80	26	10
34680 5	T15	100	126	80	26	10
34681 2	T20	100	132	100	32	10
34682 9	T25	100	132	100	32	10
34683 6	T27	100	132	100	32	10
34684 3	T30	100	132	100	32	10
34685 0	T40	100	132	100	32	10

364DS K6 **TORX® driver set with ComfortGrip.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
Application: For comfortable high torque transfer.
Especially useful for loosening or tightening screws that are hard to move.
Extra: One piece blade, through the handle withstands even the highest stresses.
ChromTop® blade tip for the highest accuracy at both ends.
6 common sizes in set packaging.

Order-No.		
26248 8	364DS K6	1
	364DS T10 T15 T20 T25 T30 T40	

Wiha T-handle.

The classic for high torques.

The handle design is such that the complete handle surface can be used, thus enabling optimum power transmission.

The ergonomic design of the Wiha T-handle that fits comfortably into the hand ensures optimum, symmetrical torque transmission from the hand through the blade to the screw. The extruded, angled end of the blade ensures that, even at the highest torques, the blade does not slip but gains a secure hold when either tightening or loosening the screw. As the blades are subjected to high stresses, Wiha uses exclusively high-quality chrome-vanadium steels that are first subjected to a complex hardening procedure before being used in the wearresistant blades.

A wide range of hex (metric and inch sizes), TORX® and TORX PLUS® blades, as well as hex drivers (metric and inch), ensures that the perfect tool is at hand for all conceivable applications.
A colour-coding system for the handles facilitates the selection of the right blade.

Thanks to the clear colour-coding system, you're sure to select the appropriate blade.

Wiha T-handle.

- High torque transmission thanks to ergonomic handle
- Through hardened blades made of chrome-vanadium steel withstand every stress
- The angled blade end is injection-moulded into the T-handle and non detachable
- Hanging hole for workshop storage
- Made of high-quality plastic

For Allen screws (metric).

334R **Hex driver with T-handle.**
With MagicRing®.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: MagicRing® made from spring steel holds all standard screws tight at various angles (available from 3 mm).

Order-No.						
22168 3	3	100	126	80	26	10
22170 6	4	150	176	80	26	10
22172 0	5	150	182	100	32	10
22174 4	6	150	182	100	32	10
21960 4	8	200	232	100	32	10
21962 8	10	200	238	120	38	10

For Allen screws (metric).

540 **Ball end hex driver with T-handle.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort, especially for screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.						
04111 3	4	150	176	80	26	10
04108 3	5	150	182	100	32	10
04105 2	6	150	182	100	32	10
04099 4	8	200	238	100	32	10
04096 3	10	200	238	120	38	10

334R VB **Hex driver set with T-handle.**
With MagicRing®, in bench stand, 6 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: MagicRing® made from spring steel holds all standard screws in every position.
Robust metal workbench holder to place on workbench or wall-mount.
Tip diagrams printed to scale.

Order-No.	Series					
22096 9	334R VB					1
	334R	3x100	4x150	5x150	6x150	
		8x200	10x200			

Wiha Info

Wiha MagicRing®:

spring steel ring
reliably holds hex screws in place.

Wiha T-handle.

The classic for high torques.

For Allen screws (metric).

334 **Hex driver with T-handle.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.

Order-No.	◉		⬡				
00904 5	2	100	-	126	80	26	10
00905 2	2	200	-	226	80	26	10
00906 9	2.5	100	-	126	80	26	10
00907 6	2.5	200	-	226	80	26	10
00908 3	3	100	-	126	80	26	10
00909 0	3	150	-	176	80	26	10
00910 6	3	200	-	226	80	26	10
00911 3	3	350	5+	382	100	32	10
00912 0	4	100	-	126	80	26	10
00913 7	4	150	-	176	80	26	10
00914 4	4	200	-	226	80	26	10
00915 1	4	350	5+	382	100	32	10
00916 8	5	100	-	132	100	32	10
00917 5	5	150	-	182	100	32	10
00918 2	5	200	-	232	100	32	10
00919 9	5	350	-	382	100	32	10
00921 2	6	100	-	132	100	32	10
00922 9	6	150	-	182	100	32	10
00923 6	6	200	-	232	100	32	10
00924 3	6	350	-	382	100	32	10
00926 7	7	200	-	232	100	32	10
00928 1	8	100	-	132	100	32	10
00929 8	8	150	-	182	100	32	10
00930 4	8	200	-	232	100	32	10
00931 1	8	350	-	372	100	32	10
00933 5	10	100	-	138	120	38	10
00934 2	10	200	-	238	120	38	10
00937 3	12	200	-	238	120	38	5

+ Overlength with reinforced blade

334 VB **Hex driver set with T-handle.**
In bench stand, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: Robust metal workbench holder to place on workbench or wall-mount.
Tip diagrams printed to scale.

Order-No.	Series				
00953 3	334 VB				1
◉	334	2x100	2.5x100	3x100	4x150
		5x150	6x200	8x200	

For hex nuts.

336 **Hex nut driver with T-handle.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: Recess in shank to accomodate for long screws.

Order-No.	O					
00965 6	5.5	125	157	100	32	10
00966 3	6	125	157	100	32	10
00967 0	6	200	232	100	32	10
00968 7	7	125	157	100	32	10
00969 4	7	200	232	100	32	10
00970 0	7	350	382	100	32	10
00971 7	8	125	157	100	32	10
00972 4	8	200	232	100	32	10
00973 1	8	350	382	100	32	10
00974 8	9	125	157	100	32	10
00975 5	9	200	232	100	32	10
00977 9	10	125	157	100	32	10
00978 6	10	200	232	100	32	10
00979 3	10	230	262	100	32	10
00980 9	10	350	382	100	32	10
00982 3	11	125	157	100	32	10
00983 0	11	230	262	100	32	5
00985 4	12	125	157	100	32	10
00986 1	12	230	262	100	32	5
00988 5	13	125	157	100	32	10
00989 2	13	230	262	100	32	10
00990 8	13	350	382	100	32	10
00991 5	14	125	157	100	32	5
00993 9	15	125	157	100	32	5
00994 6	16	125	157	100	32	5
00995 3	17	125	157	100	32	5

For external square drive screws.

338 **Square nut driver with T-handle.**

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: Recess in shank to accomodate for long screws.

Order-No.	O					
01005 8	6	125	157	100	32	10
01006 5	8	125	157	100	32	10
01007 2	10	125	157	100	32	10
01008 9	12	125	157	100	32	10

For hexagon bolts and Allen screws (metric).

336 Zoll **Hex nut driver with T-handle.**
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: Recess in shank to accomodate for long screws.

Order-No.	O					mm	
02819 0	3/16	150	182	100	32	4.76	10
02820 6	1/4	150	182	100	32	6.35	10
02821 3	5/16	150	182	100	32	7.94	10
02822 0	3/8	150	182	100	32	9.53	10
02823 7	7/16	150	182	100	32	11.11	10
02824 4	1/2	150	182	100	32	12.70	10

334 Zoll **Hex driver with T-handle.**
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.

Order-No.	◉					mm	
02802 2	3/32	150	182	80	26	2.38	10
02803 9	7/64	150	182	80	26	2.78	10
02804 6	1/8	150	182	80	26	3.18	10
02805 3	9/64	150	182	80	26	3.57	10
02806 0	5/32	150	182	80	26	3.97	10
02807 7	3/16	150	182	100	32	4.76	10
02808 4	7/32	150	182	100	32	5.56	10
02809 1	1/4	150	182	100	32	6.35	10
02810 7	5/16	150	182	100	32	7.94	10
02811 4	3/8	150	188	120	38	9.53	10

Wiha Info

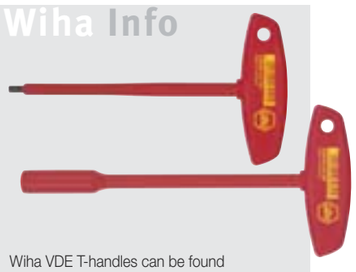

Wiha VDE T-handles can be found in the VDE range on page 231.

Wiha T-handle.

The classic for high torques.

For TORX® screws.

364 **TORX® driver with T-handle.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: ChromTop® blade tip for the highest accuracy.

Order-No.							
01328 8	T9	100	4.0	126	80	26	10
01329 5	T10	100	4.0	126	80	26	10
01330 1	T15	100	4.0	126	80	26	10
01331 8	T15	200	5.5	226	80	26	10
01332 5	T20	100	4.0	132	100	32	10
01333 2	T20	200	5.5	232	100	32	10
01334 9	T25	100	4.5	132	100	32	10
01335 6	T25	200	5.5	232	100	32	10
01336 3	T27	100	5.5	132	100	32	10
01337 0	T27	200	5.5	232	100	32	10
01338 7	T30	100	6.0	132	100	32	10
01339 4	T30	200	6.0	232	100	32	10
01340 0	T40	100	7.0	132	100	32	10
01341 7	T40	200	7.0	232	100	32	10
01343 1	T45	250	8.0	288	120	38	10
01345 5	T50	250	9.0	288	120	38	10

364 VB **TORX® driver set with T-handle.**
In bench stand, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: ChromTop® blade tip for the highest accuracy.
Robust metal workbench holder to place on workbench or wall-mount.
Tip diagrams printed to scale.

Order-No.	Series				
01348 6	364 VB				1
	364	T10x100	T15x100	T20x100	T25x100
		T30x100	T40x200	T50x250	

For TORX® and TORX PLUS® screws.

364R **TORX® driver with T-handle.**
With MagicSpring®.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: MagicSpring® made of stainless steel holds TORX® screws tight at various angles.
ChromTop® blade tip for the highest accuracy.
Blade made of hexagonal material is particularly capable of withstanding stress.

Order-No.							
27964 6	T9	100	4.0	126	80	26	10
27965 3	T10	100	4.0	126	80	26	10
27966 0	T15	100	4.0	126	80	26	10
27967 7	T20	100	4.0	132	100	32	10
27968 4	T25	100	5.0	132	100	32	10
27969 1	T27	100	6.0	132	100	32	10
27970 7	T30	100	6.0	132	100	32	10
27971 4	T40	100	8.0	132	100	32	10

364IP **TORX PLUS® driver with T-handle.**

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Wiha T-handle.
Application: For high torque transfer with minimal effort.
Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
ChromTop® blade tip for the highest accuracy.
Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.							
26953 1	9IP	100	4.0	126	80	26	10
26954 8	10IP	100	4.0	126	80	26	10
26955 5	15IP	100	4.0	126	80	26	10
26956 2	20IP	100	4.0	132	100	32	10
26957 9	25IP	150	4.5	182	100	32	10
26958 6	27IP	150	5.5	182	100	32	10
26959 3	30IP	150	6.0	182	100	32	10
26960 9	40IP	150	7.0	182	100	32	10

Wiha flag and key handle.

The knack of applying just the right amount of pressure.

Innovative torsion blade in sizes T5 to T10 does not damage the expensive fastening screws or the tool profile.

Screwdrivers with flag or key handles are used whenever replacing indexable inserts on milling heads. Thanks to the large support area for thumb and index finger, it is possible to loosen or tighten any screw with comfort by applying just the right amount of pressure. These tools are also particularly suitable for high-torque adjustment work

The small, 7-piece bench stand ensures a tidy working environment.

The flag and key handles have large support surfaces for thumb and index finger for ease of use and efficiency.

Wiha flag and key handle.

- Large support areas for thumb and index finger on the ergonomically shaped handles. The transmission of high torques is thus quite simple
- Cylindrical handle shaft for quick turning of screws
- Innovative torsion blade for T5 to T10 greatly reduces the risk of breakage. Thus, broken profiles in the screw head are largely avoided. If more torque than required is applied, the blade responds elastically (cf. picture)
- Thanks to thin blades, even covered screws in the screw axis can be turned

Wiha key handle.

For Allen screws and TORX® screws.

331 **Hex driver with key handle.**
Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Wiha key handle.
Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.

Order-No.					
00894 9	1.5	60	95	40	10
00895 6	2	60	95	40	10
00896 3	2.5	60	95	40	10
00897 0	3	60	95	40	10

365 **TORX® driver with key handle.**
Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Wiha key handle.
Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.

Order-No.						
04918 8	T5	35	2.0	70	40	10
01350 9	T6	35	2.0	70	40	10
01351 6	T7	35	2.5	70	40	10
01352 3	T8	40	2.5	75	40	10
01353 0	T9	40	3.0	75	40	10
01354 7	T10	40	3.0	75	40	10
01355 4	T15	45	3.5	80	40	10
01356 1	T20	45	4.0	80	40	10

365 VB **TORX® screwdriver set with key handle.**
In small bench stand, 7 pcs.
Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Wiha key handle.
Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.
Extra: Small, robust metal workbench holder to stand on workbench. Tip diagrams printed to scale.

Order-No.	Series				
25624 1	365 VB				1
	365	T6x35	T7x35	T8x40	T9x40
		T10x40	T15x45	T20x45	

For TORX PLUS® screws.

365IP **TORX PLUS® driver with key handle.**
Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Wiha key handle.
Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.
Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.						
26181 8	5IP	35	2.0	70	40	10
26182 5	6IP	35	2.0	70	40	10
26183 2	7IP	35	2.5	70	40	10
26184 9	8IP	40	2.5	75	40	10
26185 6	9IP	40	3.0	75	40	10
26186 3	10IP	40	3.0	75	40	10
26187 0	15IP	45	3.5	80	40	10
26188 7	20IP	45	4.0	80	40	10

365IP VB **TORX PLUS® driver set with key handle.**
In small bench stand, 7 pcs.
Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Wiha key handle.
Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.
Extra: Small, robust metal workbench holder to stand on workbench. Tip diagrams printed to scale.

Order-No.	Series				
26261 7	365IP VB				1
	365IP	6IPx35	7IPx35	8IPx40	9IPx40
		10IPx40	15IPx45	20IPx45	

Wiha Info

Colour-coding system:

red:
metric hex blades

yellow:
inch hex blades

green:
TORX® blades

light green:
TORX PLUS® blades

Wiha flag handle and offset screwdriver.

For TORX® and TORX PLUS® screws.

370 **TORX® driver with flag handle.**
Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Wiha flag handle.
Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.

Order-No.						
03724 6	T5	35	2.0	62	15	10
03725 3	T6	35	2.0	62	15	10
03726 0	T7	35	2.5	67	19	10
03727 7	T8	40	2.5	72	19	10
03728 4	T9	40	3.0	74	24	10
03729 1	T10	40	3.0	74	24	10
03730 7	T15	45	3.5	80	28	10
03731 4	T20	45	4.0	80	28	10

370 VB **TORX® driver set with flag handle.**
In small bench stand, 7 pcs.

Order-No.	Series				
25625 8	370 VB				1
	370	T6x35	T7x35	T8x40	T9x40
		T10x40	T15x45	T20x45	

370IP **TORX PLUS® driver with flag handle.**
Blade: Chrome-vanadium steel, through hardened, black-finish.
Handle: Wiha flag handle.
Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.
Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.						
27614 0	5IP	35	2.0	67	15	10
27615 7	6IP	35	2.0	67	15	10
27616 4	7IP	35	2.5	67	19	10
27617 1	8IP	40	2.5	72	19	10
27618 8	9IP	40	3.0	74	24	10
27619 5	10IP	40	3.0	74	24	10
27620 1	15IP	45	3.5	80	28	10
27621 8	20IP	45	4.0	80	28	10

For slotted, Phillips and Pozidriv screws.

207 **Slotted offset screwdriver with handle.**
Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: DIN 5200.
Application: For working in confined spaces.

Order-No.						
00373 9	3.5	0.6	90	8.5	3.5	10
00374 6	4.0	0.8	100	9.0	4.0	10
00375 3	5.5	1.0	125	10.5	5.5	10
00376 0	6.5•	1.2	125	13.5	6.5	10
00377 7	8.0	1.2	150	17.0	8.0	10
00378 4	10.0	1.6	175	24.0	9.0	10
00379 1	12.0	2.0	200	27.0	10.0	5

• Additional dimension. Non-DIN size

161 **Phillips offset screwdriver with handle.**
Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: DIN 5208.
Application: For working in confined spaces.

Order-No.					
00144 5	PH1	PH2	125	14.5	5.5	10
00145 2	PH2	PH3	150	21.0	8.0	10
00146 9	PH3	PH4	200	25.0	10.0	10

224 **Pozidriv offset screwdriver with handle.**
Blade: Chrome-vanadium steel, through hardened, black-finish.
Standards: DIN 5208.
Application: For working in confined spaces.

Order-No.						
00432 3	PZ1	PZ2	125	14.5	5.5	10
00433 0	PZ2	PZ3	150	21.0	8.0	10
00434 7	PZ3	PZ4	200	25.0	10.0	10

Wiha bits.

Wiha makes it possible: Perfect technic for professional work.

	Drive										
	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®	Hex	Square	Multi-tooth	Tri-Wing® + Torq-Set®	SIT + Spanner
DuraBits	113	113	113	113							
Diamond torsion bits	115	115	115	115							
Torsion bits	117–119	117–120	117–120	117–119						120	
Inkra bits		121	121								
Standard bits	123, 128	123, 128	123, 128	124, 128–129	124, 130	124, 130	125, 131	126, 131	126		126
Bits with MagicRing®							125, 131				
Threaded bits		132	132								
Bits for drive system C 4	134–135	134–135		134–135			134–135				
Bits for drive system C 8 5/16"	136	136	136	136			136				
Bits for drive system G 7		136	136								
	Wood twist drill	Twist drill	Universal drill	Combination drill	Counter-sink						
Drill bits	138	138	139	139	139						

Wiha stainless steel bits.
See stainless steel tool range, page 294 – 301

Bits range

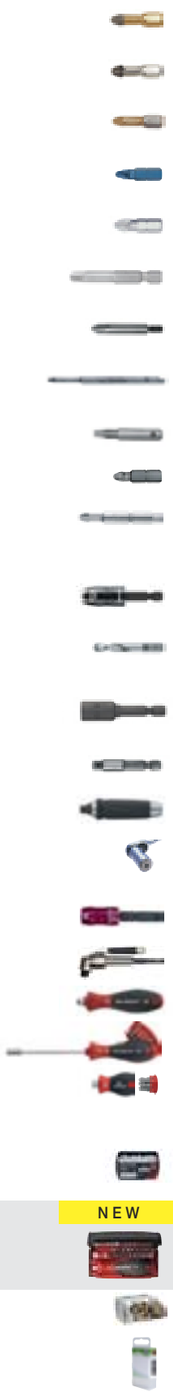

Individual bits

Wiha drive system C 6.3 and E 6.3

Wiha DuraBit.
A diamond among bits. ..... 112 – 113

Wiha Diamond torsion bit.
Saves strength, time & money. ..... 114 – 115

Wiha Torsion bit.
Patented torsion zone for longer service life. ..... 116 – 120

Wiha Inkra bit.
The specialist for every angle. 121

Wiha Standard bit.
Full programme range in outstanding quality. ..... 122 – 131

Wiha Xeno bits.
For terminal screws. 127

Wiha threaded bit.
For optimised use in stationary screw systems. 132

Wiha special bits.
Customised for your application. 133

Wiha bits for drive system C 4. ..... 134 – 135

Wiha bits for drive system C 8 5/16". 136

Wiha bits for drive system G 7. 136

Wiha CentroFix system. Quick and professional. 137

Wiha CentroFix.
One for all. ..... 137 + 147

Wiha drill bits.
Just keep on working. ..... 138 – 139

Wiha nut driver product line.
The entire line for hand and machine use. ..... 140 – 143

Wiha adapters. 144

Wiha impact screwdriver assortment. 145

Wiha Gripper. Siezes everything. 146

Bit holders

Wiha bit holder for power machines. ..... 148 – 149

Wiha offset screwdriver. 149

Wiha bit holder with handle. 150

Wiha magazine bit holder. Everything in the palm of your hand. ..... 151 – 152

Wiha magazine bit holder Stubby. 153

Bit ranges

Wiha XSelector and XLSelector.
Couldn't be smaller! ..... 154 – 161

NEW

Available from 1. June 2010

Wiha Collector.
Everything in one box. ..... 162 – 163

Wiha bit cassette and bulk packs. ..... 164 – 165

Wiha SB bit programme.
Full programme range in outstanding quality. ..... 166 – 171

Wiha DuraBit.

A diamond among bits.

The extremely wear-resistant hard-metal coating considerably increases tool life.

With DuraBit, Wiha puts its innovative strength to the test. The tough torsion bit has an extremely wear-resistant hard-metal coating that gains a secure hold in the screw head.

This revolutionary coating technology originates from the aerospace industry and guarantees outstanding gripping of the bit surface.
The user quickly comes to appreciate the benefits: a longer tool life, much reduced cam-out effects and superior handling enable efficient work, even with the most difficult of applications.

The wolfram carbide particles are permanently applied to the bit tip – a breaking away of the particles (as occurs with conventional, diamond-coated bits) is therefore significantly reduced.

The Dura coating reduces CamOut effects to an unbeatable minimum – no more slipping out of the bit from the screw head.



Wolfram carbide particles.

Non-corroding nickel coating.

Long-lasting, durable wolfram carbide coating increases service life of the bit by many times when compared to a diamond-coated bit. The subjacent nickel coating ensures extra-long corrosion resistance.

Wiha DuraBit.

- Extremely wear-resistant hard-metal coating also used in the aerospace industry gains a secure hold in the screw head. Outstanding reduction of CamOut forces prevents slipping out of the bit
- Wolfram carbide particles guarantee a significantly greater service life when compared to conventional diamond-coated bits
- Nickel coating of the entire bit for extra-long corrosion resistance
- Clear reduction in the cam-out effect (slipping of the bit out of the screw head) for:
  - Fatigue-free work (less force required)
  - Less wear of bit and screw
  - Safe work on delicate surfaces
- Work with Wiha DuraBits featuring torsion zones reduces the amount of time for fastening and enables economic and safe work

Style C 6.3 (1/4").

7010 DR **DuraBit with torsion zone, slotted, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Hard-metal coating, extremely wear-resistant.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits.
Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

Order-No.				
23104 0	**4.5**	**25**	0.6	10
23106 4	**5.5**	**25**	0.8	10
23110 1	**6.5**	**25**	1.2	10

7011 DR **DuraBit with torsion zone, Phillips, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Hard-metal coating, extremely wear-resistant.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits.
Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

Order-No.			
23114 9	**PH1**	**25**	10
23116 3	**PH2**	**25**	10
23118 7	**PH3**	**25**	10

7012 DR **DuraBit with torsion zone, Pozidriv, style C 6.3.**

Order-No.			
23120 0	**PZ1**	**25**	10
23122 4	**PZ2**	**25**	10
23124 8	**PZ3**	**25**	10

Style C 6.3 and E 6.3 (1/4").

7015 DR **DuraBit with torsion zone, TORX®, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Hard-metal coating, extremely wear-resistant.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits.
Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

Order-No.			
23133 0	**T10**	**25**	10
23135 4	**T15**	**25**	10
23137 8	**T20**	**25**	10
23139 2	**T25**	**25**	10
23141 5	**T30**	**25**	10
23143 9	**T40**	**25**	10

7041 DR **DuraBit with torsion zone, Phillips, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Hard-metal coating, extremely wear-resistant.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits.
Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

Order-No.			
23388 4	**PH1**	**50**	5
23390 7	**PH2**	**50**	5
23392 1	**PH3**	**50**	5

7042 DR **DuraBit with torsion zone, Pozidriv, style E 6.3.**

Order-No.			
23394 5	**PZ1**	**50**	5
23396 9	**PZ2**	**50**	5
23398 3	**PZ3**	**50**	5

Wiha Diamond torsion bit.

Saves strength, time & money.

Finest diamond particles and sapphire particles ensure a firm grip a thousand times over.

Diamond torsion bits supplement Wiha's range of high-quality special bits. In the area of mechanical fastening the significantly greater tool life means substantial cost reductions. The new Wiha diamond torsion bits are recognisable by their silver look and striking black tip and offer an impressively secure grip in the screw.

The Diamond torsion bit from Wiha scores on two accounts:
it reduces the amount of pressure that has to be applied and increases the tool life.

The torsion zone protects against torque peaks.

Wiha Diamond torsion bit.

- Reduction of:
  - Pressure forces to be applied
  - Wear and tear of bit and screw head
  - The amount of time to turn the screw and thus reduction in the costs of screw applications
  - Cam-out effect
- Extended service life as a result of the improved torsion zone
- Nickel coating of the entire bit for extra-long corrosion resistance

Style C 6.3 (1/4").

7010 D **Diamond torsion bit, slotted, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.				
21272 8	4.5	25	0.6	10
21216 2	5.5	25	0.8	10
21220 9	6.5	25	1.2	10

7011 D **Diamond torsion bit, Phillips, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.			
21193 6	PH1	25	10
21194 3	PH2	25	10
21196 7	PH3	25	10

7012 D **Diamond torsion bit, Pozidriv, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.			
21198 1	PZ1	25	10
21200 1	PZ2	25	10
21202 5	PZ3	25	10

Style C 6.3 and E 6.3 (1/4").

7015 D **Diamond torsion bit, TORX®, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.			
21204 9	T10	25	10
21206 3	T15	25	10
21208 7	T20	25	10
21210 0	T25	25	10
21212 4	T30	25	10
21214 8	T40	25	10

7041 D **Diamond torsion bit, Phillips, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.			
23376 1	PH1	50	5
23378 5	PH2	50	5
23380 8	PH3	50	5

7042 D **Diamond torsion bit, Pozidriv, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.			
23382 2	PZ1	50	5
23384 6	PZ2	50	5
23386 0	PZ3	50	5

Wiha Torsion bit.

Patented torsion zone for longer service life.

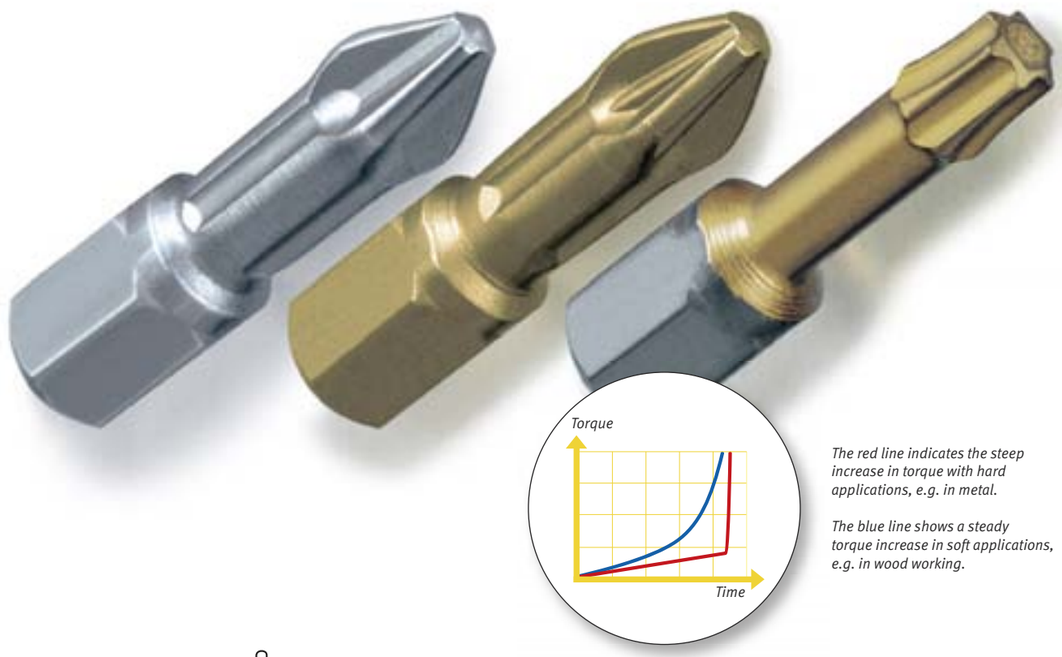

The red line indicates the steep increase in torque with hard applications, e.g. in metal.

The blue line shows a steady torque increase in soft applications, e.g. in wood working.

The main cause of wear with soft fastening applications such as in wood for example is the wear of the profile edges because the bit rattles through. A hard bit needs to be used here: Wiha HOT.

With hard fastening jobs such as hitting metal surfaces the main reason for wear is breakage of the bits. These usually occur with torque peaks near to the end of the fastening process. A tough-but-flexible bit is the answer: Wiha ZOT.

The special assortment of Wiha torsion bits with torsion zones offers optimal products for both soft and hard fastening tasks.

Wiha Torsion bit.

Wiha ZOT Torsion bits

- Tough, hard Torsion quality for **hard applications**
- Ideal for screw applications in metal and hard materials
- Elastic Torsion zone absorbs the strong torque peaks in the final phase of the application (red line)
- Highly resistant to wear and tear due to special heat treatment
- Hardness 61-2 HRC.
- For trade and DIY

Wiha HOT Torsion bits

- Extra hard Torsion quality for **soft applications**
- Ideal for screw applications in wood and soft materials
- Average requirements concerning elasticity are used to optimise performance and resistance to wear and tear (blue line)
- Hardness 63-2 HRC.
- For trade and DIY

Wiha TiN Torsions bits

- Tough, hard Torsion quality with very hard **ti**tanium-**n**itride (**TiN**) coating
- Optimum resistance to wear and tear due to very hard TiN coating
- Combines the advantages of Wiha HOT bits and ZOT bits in one outstanding bit
- For trade and DIY, especially for industry

Style C 6.3 (1/4").

7010 TiN **TiN Torsion bit, slotted, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for screws that require frequent working.

Order-No.				
04743 6	4.5	25	0.6	10
04744 3	5.5	25	0.8	10
04745 0	6.5	25	1.2	10
04746 7	8.0	25	1.2	10

7011 TiN **TiN Torsion bit, Phillips, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for screws that require frequent working.

Order-No.			
04654 5	PH1	25	10
04655 2	PH2	25	10
04656 9	PH3	25	10

7012 TiN **TiN Torsion bit, Pozidriv, style C 6.3.**

Order-No.			
04657 6	PZ1	25	10
04658 3	PZ2	25	10
04659 0	PZ3	25	10

7015 TiN **TiN Torsion bit, TORX®, style C 6.3.**

Order-No.			
20964 3	T6	25	10
20966 7	T7	25	10
20968 1	T8	25	10
20970 4	T9	25	10
20972 8	T10	25	10
20974 2	T15	25	10
20976 6	T20	25	10
20978 0	T25	25	10
20980 3	T27	25	10
20982 7	T30	25	10
20984 1	T40	25	10

Style E 6.3 (1/4").

7041 TiN **TiN Torsion bit, Phillips, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for screws that require frequent working.

Order-No.			
04861 7	PH1	50	5
04862 4	PH2	50	5
04863 1	PH3	50	5

7042 TiN **TiN Torsion bit, Pozidriv, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for screws that require frequent working.

Order-No.			
04864 8	PZ1	50	5
04865 5	PZ2	50	5
04866 2	PZ3	50	5

Wiha Torsion bit.

Patented torsion zone for longer service life.

Style C 6.3 (1/4").

7010 HOT **HOT Torsion bit, slotted, style C 6.3.**
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

Order-No.				
05295 9	5.5	25	0.8	10
05296 6	6.5	25	1.2	10

7011 HOT **HOT Torsion bit, Phillips, style C 6.3.**
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Order-No.			
04486 2	PH1	25	10
04485 5	PH2	25	10
04484 8	PH3	25	10

7012 HOT **HOT Torsion bit, Pozidriv, style C 6.3.**
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Order-No.			
04483 1	PZ1	25	10
04482 4	PZ2	25	10
04481 7	PZ3	25	10

7015 HOT **HOT Torsion bit, TORX®, style C 6.3.**
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.

Order-No.			
31815 4	T10	25	10
31816 1	T15	25	10
31817 8	T20	25	10
31818 5	T25	25	10
31819 2	T30	25	10
31820 8	T40	25	10

Style E 6.3 (1/4").

7041 HOT **HOT Torsion bit, Phillips, style E 6.3.**
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

Order-No.			
04544 9	PH1	50	5
04543 2	PH2	50	5
04542 5	PH3	50	5

7042 HOT **HOT Torsion bit, Pozidriv, style E 6.3.**
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

Order-No.			
04550 0	PZ1	50	5
04549 4	PZ2	50	5
04548 7	PZ3	50	5

7045 HOT **HOT Torsion bit, TORX®, style E 6.3.**
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

Order-No.			
33666 0	T10	50	5
33667 7	T15	50	5
33668 4	T20	50	5
33669 1	T25	50	5
33670 7	T30	50	5
33671 4	T40	50	5

Style C 6.3 (1/4").

7010 ZOT **ZOT Torsion bit, slotted, style C 6.3.**
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.				
05288 1	4.5	25	0.6	10
05289 8	5.5	25	0.8	10
05290 4	5.5	25	1.0	10
05292 8	6.5	25	1.2	10
05293 5	8.0	25	1.2	10

7011 ZOT **ZOT Torsion bit, Phillips, style C 6.3.**
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.			
05299 7	PH1	25	10
05076 4	PH2	25	10
05077 1	PH3	25	10

7011 ZOT L **ZOT Torsion bit, Phillips, style C 6.3.**

Order-No.			
04699 6	PH1	50	10
04697 2	PH2	50	10
04695 8	PH3	50	10

7011 ACR **ACR® Torsion bit, Phillips, style C 6.3.**
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Extra: Anti-Cam-Out ribs ensure a secure grip in the screw and good force transfer.

Order-No.			
04919 5	PH1	25	10
04920 1	PH2	25	10
04921 8	PH3	25	10

Style C 6.3 (1/4").

7012 ZOT **ZOT Torsion bit, Pozidriv, style C 6.3.**
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.			
05074 0	PZ1	25	10
05075 7	PZ2	25	10
05069 6	PZ3	25	10

7012 ZOT L **ZOT Torsion bit, Pozidriv, style C 6.3.**

Order-No.			
04693 4	PZ1	50	10
04691 0	PZ2	50	10
04689 7	PZ3	50	10

7012 ACR **ACR® Torsion bit, Pozidriv, style C 6.3.**
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Extra: Anti-Cam-Out ribs ensure a secure grip in the screw and good force transfer.

Order-No.			
04922 5	PZ1	25	10
04923 2	PZ2	25	10
04924 9	PZ3	25	10

7015 ZOT **ZOT Torsion bit, TORX®, style C 6.3.**

Order-No.			
20940 7	T6	25	10
20942 1	T7	25	10
20945 2	T8	25	10
20946 9	T9	25	10
20948 3	T10	25	10
20950 6	T15	25	10
20952 0	T20	25	10
20954 4	T25	25	10
20956 8	T27	25	10
20958 2	T30	25	10
20960 5	T40	25	10

Wiha Torsion bit.

Patented torsion zone for longer service life.

Style C 6.3 and E 6.3 (1/4").

7019 ZOT TW ZOT Torsion bit, Tri-Wing®, style C 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For Tri-Wing® security screws.

Order-No.			
22603 9	0	25	10
22604 6	1	25	10
22605 3	2	25	10
22606 0	3	25	10
22607 7	4	25	10
22608 4	5	25	10

7019 ZOT TS ZOT Torsion bit, Torq-Set®, style C 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For Torq-Set® security screws.

Order-No.			
27030 8	0	25	10
27028 5	1	25	10
26249 5	2	25	10
26045 3	3	25	10
22591 9	4	25	10
22592 6	5	25	10
22593 3	6	25	10
22594 0	8	25	10
22595 7	10	25	10
25572 5	1/4	32	10

7041 ZOT ZOT Torsion bit, Phillips, style E 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.			
04541 8	PH1	50	5
04540 1	PH2	50	5
04539 5	PH3	50	5

Style E 6.3 (1/4").

7042 ZOT ZOT Torsion bit, Pozidriv, style E 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.			
04547 0	PZ1	50	5
04546 3	PZ2	50	5
04545 6	PZ3	50	5

7049 ZOT TW ZOT Torsion bit, Tri-Wing®, style E 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For Tri-Wing® security screws.
Extra: 90 mm bits with long spiralled torsion zone.

Order-No.			
22609 1	3	50	5
33695 0	3	90	5
22610 7	4	50	5
33696 7	4	90	5
22611 4	5	50	5
33697 4	5	90	5
22612 1	6	50	5
33698 1	6	90	5

7049 ZOT TS ZOT Torsion bit, Torq-Set®, style E 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For Torq-Set® security screws.
Extra: 90 mm bits with long spiralled torsion zone.

Order-No.			
22596 4	4	50	5
33699 8	4	90	5
22597 1	5	50	5
33700 1	5	90	5
22598 8	6	50	5
33701 8	6	90	5
22599 5	8	50	5
33702 5	8	90	5
22600 8	10	50	5

Wiha Inkra bit.

The specialist for every angle.

TEST WINNING BITS

The innovation for wood screws.

With the Inkra bit, Wiha has developed a revolutionary product for dry applications.

In practice, it is impossible to avoid working with an inclined bit axis. It is in such applications that the Inkra bit comes into its own. With its specially developed shape, the penetration depth in the screw head remains nearly constant, even in an inclined position.

Optimum torque transmission and a reduced cam-out effect are the resulting advantages.

Craftsmen value this bit because it makes their workmuch easier than using a standard bit.

User comfort and reduced pressure forces even in inclined positions.

Slippage and rounding of the bit tip are a thing of the past.

Wiha Inkra bit.

- Even when the drill is at an inclined position, the penetration depth in the screw head remains virtually constant
- No slipping and rounding of the bit tip and screw head
- Especially long service life
- The ideal bit for carpenters, joiners and craftsmen

Style C 6.3 (1/4").

7011 Inkra Inkra bit, Phillips, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: The ideal bit for areas that are difficult to access, particularly suitable for wood screws.
Extra: Non-corrosive coating.
Turning screws is easy, even if screwdriver is at an angle.

Order-No.			
21228 5	PH1	25	10
20834 9	PH2	25	10
21229 2	PH3	25	10

7012 Inkra Inkra bit, Pozidriv, style C 6.3.

Order-No.			
21231 5	PZ1	25	10
08461 5	PZ2	25	10
21233 9	PZ3	25	10

Style E 6.3 (1/4").

7041 Inkra Inkra bit, Phillips, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: The ideal bit for areas that are difficult to access, particularly suitable for wood screws.
Extra: Non-corrosive coating.
Turning screws is easy, even if screwdriver is at an angle.

Order-No.			
32499 5	PH1	50	5
32500 8	PH2	50	5
32501 5	PH3	50	5

7042 Inkra Inkra bit, Pozidriv, style E 6.3.

Order-No.			
32502 2	PZ1	50	5
32503 9	PZ2	50	5
32504 6	PZ3	50	5

Wiha Standard bit.

Full programme range in outstanding quality.

The Wiha Standard bits offer impressive quality and they are available in a versatile range.

The bits are subject to processor-aided manufacture as well as processor controlled heat treatment. Wiha thus guarantees a uniformly high product quality.

The high-quality basic material permits torque values that are far beyond the DIN standards:

- *DIN 5261 for PH/PZ-bits*
- *DIN 5263 for slotted bits*
- *Camcar standards for TORX® and TORX PLUS® bits*

This results in a long tool life at high torque values; this is the ideal prerequisite for standard applications.

Wiha Standard bits are the ideal multi-purpose tool to meet high requirements in terms of both quality and performance.

Wiha Standard bit.

- Robust and powerful allrounder bits for trade, industry and DIY
- Suitable for all applications. Thanks to ist hardness values of HRC 59-61, it can be used for both manual and machine applications
- Highly resistant to wear and tear for a long tool life
- Optimum fitting in DIN screws for low wear and tear as well as optimum torque transmission
- Production based on industrial quality criteria according to the valid ISO standards with uniformly high product quality

Style C 6.3 (1/4").

7010 Z **Standard bit, slotted, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.				
01623 4	4.5	25	0.6	10
01624 1	5.5	25	0.8	10
01626 5	6.5	25	1.2	10
01627 2	8.0	25	1.6	10

7010 Z L **Standard bit, slotted, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.				
01604 3	3.0	39	0.5	10
01607 4	3.5	39	0.6	10
01606 7	4.0	39	0.5	10
01610 4	4.0	39	0.8	10
01609 8	4.5	39	0.6	10
01612 8	5.5	39	0.8	10
01613 5	5.5	39	1.0	10
01617 3	6.5	39	1.2	10
01619 7	8.0	39	1.2	10
01621 0	8.0	39	1.6	10

Style C 6.3 (1/4").

7011 Z **Standard bit, Phillips, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.			
05298 0	PH0	25	10
01657 9	PH1	25	10
01658 6	PH2	25	10
01659 3	PH3	25	10
01649 4	PH4	32	10

7012 Z **Standard bit, Pozidriv, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.			
05300 0	PZ0	25	10
01688 3	PZ1	25	10
01689 0	PZ2	25	10
01690 6	PZ3	25	10
01681 4	PZ4	32	10

Wiha Standard bit.

Full programme range in outstanding quality.

Style C 6.3 (1/4").

7015 Z **Standard bit, TORX®, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.			
26250 1	T3	25	10
25097 0	T4	25	10
01711 8	T5	25	10
01712 5	T6	25	10
01713 2	T7	25	10
01714 9	T8	25	10
01715 6	T9	25	10
01716 3	T10	25	10
01717 0	T15	25	10
01718 7	T20	25	10
01719 4	T25	25	10
01720 0	T27	25	10
01721 7	T30	25	10
01722 4	T40	25	10
01723 1	T45	35	10
01724 8	T50	35	10

7015K Z **Standard bit, TORX® conic, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Conical shape for a perfect clamping of the screw.

Order-No.			
04925 6	T10	25	10
04926 3	T15	25	10
04927 0	T20	25	10
04928 7	T25	25	10
04929 4	T27	25	10
04930 0	T30	25	10
04931 7	T40	25	10

7015 Z TR **Standard bit, TORX® H, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Hole in the bit tip for TORX® Tamper Resistant security screws.

Order-No.			
03115 2	T7H	25	10
03117 6	T8H	25	10
01726 2	T9H	25	10
01727 9	T10H	25	10
01728 6	T15H	25	10
01729 3	T20H	25	10
01730 9	T25H	25	10
01731 6	T27H	25	10
01732 3	T30H	25	10
01733 0	T40H	25	10

Style C 6.3 (1/4").

7016 Z **Standard bit, TORX PLUS®, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Reinforced profile cross-section transfers approx. 25% more torque than with a TORX® profile.

Order-No.				
25994 5	3IP	25	N E W	10
25996 9	4IP	25		10
25998 3	5IP	25		10
23173 6	6IP	25		10
23175 0	7IP	25		10
23177 4	8IP	25		10
23179 8	9IP	25		10
23181 1	10IP	25		10
23183 5	15IP	25		10
23185 9	20IP	25		10
23187 3	25IP	25		10
23189 7	27IP	25		10
23191 0	30IP	25		10
23193 4	40IP	25		10

7016 Z IPR **Standard bit, TORX PLUS® Security, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Attention: Security profile - sold only to authorised customers.
Written proof of authorisation must be received.

Order-No.			
26346 1	10IPR	25	10
26347 8	15IPR	25	10
26348 5	20IPR	25	10
26349 2	25IPR	25	10
26350 8	30IPR	25	10
26351 5	40IPR	35	10

Style C 6.3 (1/4").

7013 Z **Standard bit, hex, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.			
04011 6	1.5	25	10
01703 3	2.0	25	10
01704 0	2.5	25	10
01705 7	3.0	25	10
01706 4	4.0	25	10
01707 1	5.0	25	10
01708 8	6.0	25	10
01709 5	8.0	25	10
01710 1	10.0	25	10

7013R Z **Standard bit, hex, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws in every position.

Order-No.			
22955 9	3.0	25	10
22956 6	4.0	25	10
22957 3	5.0	25	10
22958 0	6.0	25	10

7013 Z TR **Standard bit, hex Tamper Resistant, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Hole in the tip of the bit for hex Tamper Resistant security screws.

Order-No.			
25560 2	TR2.0	25	10
25561 9	TR2.5	25	10
25562 6	TR3.0	25	10
25563 3	TR4.0	25	10
25564 0	TR5.0	25	10

Style C 6.3 (1/4").

7017 Z **Standard bit, ball end hex, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Especially for screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.			
01734 7	1.5	38	10
01735 4	2.0	38	10
01736 1	2.5	38	10
01737 8	3.0	38	10
01738 5	4.0	38	10
01739 2	5.0	38	10
01740 8	6.0	38	10

7017R Z **Standard bit, ball end hex, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws in every position.
Ball end allows a working angle up to 25°.

Order-No.			
22959 7	3.0	38	10
22960 3	4.0	38	10
22961 0	5.0	38	10
22962 7	6.0	38	10

Wiha Standard bit.

Full programme range in outstanding quality.

Style C 6.3 (1/4").

7018 Z **Standard bit, Robertson, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: A tapered tip allows for easy insertion of the bit into the screw.

Order-No.			
06634 5	1	25	5
06635 2	2	25	5
06636 9	3	25	5

7019 Z XZN **Standard bit, multi-tooth, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For use in automotive applications.

Order-No.			
26352 2	M3	25	10
26353 9	M4	25	10
26354 6	M5	25	10
26355 3	M6	25	10
26356 0	M8	35	10

Style C 6.3 (1/4").

7019 Z SP **Standard bit, spanner, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For security screws - snake eye.

Order-No.			
27064 3	4	25	10
27065 0	6	25	10
27066 7	8	25	10
27067 4	10	25	10

7019 Z SIT **Standard bit, SIT, style C 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For ASSY® and Pias screws.
Extra: With colour-coding.

Order-No.				
27256 2	SIT 10	25	pink	10
27257 9	SIT 20	25	orange	10
27258 6	SIT 25	25	green	10
27259 3	SIT 30	25	yellow	10
27260 9	SIT 40	25	light pink	10

Wiha Info

Colour-coding of SIT bits:

- pink = SIT 10
- orange = SIT 20
- green = SIT 25
- yellow = SIT 30
- light pink = SIT 40

Wiha Xeno bits.

For terminal screws.

Wiha's new bits for terminal screws.

The Wiha Xeno bit is a special bit used for fastening and unfastening terminal screws. These screws are typically used with switch cabinet systems and fuse boxes, terminal blocks and relays. They have a special combination profile and are available in a slotted/Phillips or slotted/Pozidriv design.

Wiha Xeno bits.

- The special slotted/Phillips or slotted/Pozidriv profile of the Xeno is optimally suited for terminal screws
- The combination profile reduces slipping and ensures greater torque transfer

For terminal screws (slotted/Phillips).

7049XH **Xeno bit, slotted/ Phillips, style E 6.3.**
For terminal screws (slotted/ Phillips).

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For fastening and unfastening positive/ negative screws in switchboard systems, fuse boxes, terminal blocks and relays.

Order-No.			
32490 2	SL/PH1	50	5
32491 9	SL/PH1	70	5
32686 9	SL/PH1	90	5
32492 6	SL/PH2	50	5
32493 3	SL/PH2	70	5
32687 6	SL/PH2	90	5

For terminal screws (slotted/Pozidriv).

7049XZ **Xeno bit, slotted/ Pozidriv, style E 6.3.**
For terminal screws (slotted/ Pozidriv).

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For fastening and unfastening positive/ negative screws in switchboard systems, fuse boxes, terminal blocks and relays.

Order-No.			
32494 0	SL/PZ1	50	5
32495 7	SL/PZ1	70	5
32688 3	SL/PZ1	90	5
32496 4	SL/PZ2	50	5
32497 1	SL/PZ2	70	5
32689 0	SL/PZ2	90	5

Wiha Standard bit.

Full programme range in outstanding quality.

Style E 6.3 (1/4").

7040 Z **Standard bit, slotted, style E 6.3.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.				
33961 6	2.5	70	0.4	5
01790 3	3.0	50	0.5	5
33962 3	3.0	70	0.5	5
01792 7	3.5	50	0.6	5
33963 0	3.5	70	0.6	5
01791 0	4.0	50	0.5	5
01794 1	4.0	50	0.8	5
33964 7	4.0	70	0.8	5
01793 4	4.5	50	0.6	5
01795 8	5.5	50	0.8	5
01796 5	5.5	50	1.0	5
33965 4	5.5	70	1.0	5
01798 9	6.5	50	1.2	5
33966 1	6.5	70	1.2	5
01799 6	8.0	50	1.2	5
01800 9	8.0	50	1.6	5

7041 Z **Standard bit, Phillips, style E 6.3.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Overlength bits available in lengths of 50, 70, 90, 110, 127 and 150 mm.

Order-No.				
31960 1	PH00	50		5
31961 8	PH00	70		5
31962 5	PH00	90		5
32105 5	PH0	50		5
35456 5	PH0	70	NEW	5
35457 2	PH0	90	NEW	5
33703 2	PH1	50		5
01803 0	PH1	70		5
04126 7	PH1	90		5
23213 9	PH1	110		5
23219 1	PH1	127		5
22509 4	PH1	150		5
33704 9	PH2	50		5
01805 4	PH2	70		5
04009 3	PH2	90		5
05800 5	PH2	110		5
06888 2	PH2	127		5
22510 0	PH2	150		5
33705 6	PH3	50		5
04010 9	PH3	70		5
04127 4	PH3	90		5
23215 3	PH3	110		5
23217 7	PH3	127		5
22511 7	PH3	150		5

Style E 6.3 (1/4").

7042 Z **Standard bit, Pozidriv, style E 6.3.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Overlength bits available in lengths of 50, 70, 90, 110, 127 and 150 mm.

Order-No.			
31957 1	PZ0	50	5
31958 8	PZ0	70	5
31959 5	PZ0	90	5
33706 3	PZ1	50	5
01808 5	PZ1	70	5
01809 2	PZ1	90	5
23221 4	PZ1	110	5
23225 2	PZ1	127	5
23227 6	PZ1	150	5
33707 0	PZ2	50	5
01811 5	PZ2	70	5
01812 2	PZ2	90	5
05799 2	PZ2	110	5
06889 9	PZ2	127	5
23228 3	PZ2	150	5
33708 7	PZ3	50	5
04059 8	PZ3	70	5
04176 2	PZ3	90	5
23223 8	PZ3	110	5
23226 9	PZ3	127	5
22512 4	PZ3	150	5

NEW

7045R **Standard bit, TORX® with MagicSpring®, style E 6.3.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: MagicSpring® made of stainless steel holds TORX® screws tight at various angles.
Attention: Screw must not be attached to the rotating bit.

Order-No.			
34452 8	T10	50	5
34453 5	T15	50	5
34454 2	T20	50	5
34455 9	T25	50	5
34456 6	T30	50	5
34457 3	T40	50	5

Style E 6.3 (1/4").

7045BE **Standard bit, TORX® ball head, style E 6.3.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all internal TORX® screws, especially in hard-to-reach places.
Extra: The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.			
32409 4	T9	50	5
32410 0	T10	50	5
32416 2	T10	70	5
32417 9	T15	50	5
32418 6	T15	70	5
32411 7	T20	50	5
32419 3	T20	70	5
32420 9	T20	90	5
32412 4	T25	50	5
32421 6	T25	70	5
32422 3	T25	90	5
32413 1	T27	50	5
32414 8	T30	50	5
32423 0	T30	70	5
32424 7	T30	90	5
32415 5	T40	50	5

7045BE 9570 **Standard bits with TORX® ball end in compact bit band, 10 pcs.**
Bits: 70 mm Standard bits.
Application: Extra long bits for all types of fastening in trade and industry.
Extra: Compact plastic bit band with belt clip.

Order-No.	Series					
32804 7	7045BE 9570					1
	7045BE	2xT10	2xT15	2xT20	2xT25	2xT30

Style E 6.3 (1/4").

7045 Z **Standard bit, TORX®, style E 6.3.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Overlength bits in lengths of 50, 70, 90, 110 and 150 mm.

Order-No.			
32299 1	T5	50	5
32302 8	T6	50	5
33709 4	T6	70	5
33717 9	T6	90	5
32303 5	T7	50	5
33710 0	T7	70	5
33718 6	T7	90	5
32304 2	T8	50	5
33711 7	T8	70	5
33719 3	T8	90	5
32305 9	T9	50	5
33712 4	T9	70	5
33720 9	T9	90	5
32306 6	T10	50	5
33713 1	T10	70	5
33721 6	T10	90	5
33725 4	T10	110	5
33726 1	T10	150	5
32307 3	T15	50	5
33714 8	T15	70	5
33722 3	T15	90	5
33727 8	T15	110	5
33728 5	T15	150	5
32308 0	T20	50	5
33715 5	T20	70	5
33723 0	T20	90	5
33729 2	T20	110	5
33730 8	T20	150	5
32309 7	T25	50	5
33716 2	T25	70	5
33724 7	T25	90	5
33731 5	T25	110	5
33732 2	T25	150	5
33920 3	T27	50	5
33921 0	T27	70	5
33922 7	T27	90	5
33923 4	T30	50	5
33924 1	T30	70	5
33925 8	T30	90	5
33926 5	T30	110	5
33927 2	T30	150	5
33928 9	T40	50	5
33929 6	T40	70	5
33930 2	T40	90	5
33931 9	T40	110	5
33932 6	T40	150	5

Wiha Standard bit.

Full programme range in outstanding quality.

Style E 6.3 (1/4").

7045 Z TR **Standard bit, TORX® H, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Hole in the bit tip for TORX® Tamper Resistant security screws.

Order-No.			
21045 8	T7H	50	5
21047 2	T8H	50	5
20218 7	T9H	50	5
20219 4	T10H	50	5
24867 3	T15H	50	5
20220 0	T20H	50	5
20221 7	T25H	50	5
20222 4	T27H	50	5
20223 1	T30H	50	5
20224 8	T40H	50	5

Style E 6.3 (1/4").

7046 Z **Standard bit, TORX PLUS®, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Reinforced profile cross-section transfers approx. 25% more torque than with a TORX® profile.

Order-No.			
28481 7	5IP	50	5
26000 2	6IP	50	5
26002 6	7IP	50	5
23195 8	8IP	50	5
23197 2	9IP	50	5
23199 6	10IP	50	5
23201 6	15IP	50	5
23203 0	20IP	50	5
23205 4	25IP	50	5
23207 8	27IP	50	5
23209 2	30IP	50	5
23211 5	40IP	50	5

Style E 6.3 (1/4").

7047R Z **Standard bit, ball end hex, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry. To insert and remove screws from holes or cavities, specially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws in every position. Ball end allows a working angle up to 25°.

Order-No.			
25739 2	3.0	50	5
25740 8	4.0	50	5
25741 5	5.0	50	5
25742 2	6.0	50	5

7043R Z **Standard bit, hex, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry. To insert and remove screws from holes or cavities.
Extra: MagicRing® made from spring steel holds all standard screws in every position.

Order-No.			
23145 3	3.0	50	5
23147 7	4.0	50	5
23149 1	5.0	50	5
23151 4	6.0	50	5

Wiha Info

Wiha MagicRing®:
spring steel ring
reliably holds hex screws in place.

Style E 6.3 (1/4").

7043 Z **Standard bit, hex, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.				
05301 7	1.5	50		5
05302 4	2.0	50		5
34554 9	2.0	70	N E W	5
05303 1	2.5	50		5
34555 6	2.5	70	N E W	5
04194 6	3.0	50		5
34556 3	3.0	70	N E W	5
04195 3	4.0	50		5
34557 0	4.0	70	N E W	5
04196 0	5.0	50		5
34558 7	5.0	70	N E W	5
04197 7	6.0	50		5
34559 4	6.0	70	N E W	5
04198 4	8.0	50		5
34560 0	8.0	70	N E W	5

7048 Z **Standard bit, Robertson, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: A tapered tip allows for easy insertion of the bit into the screw.

Order-No.			
06637 6	1	50	5
06638 3	2	50	5
06639 0	3	50	5

Wiha threaded bit.

For optimised use in stationary screw systems.

For M4 and M5.

7311 Z **Threaded bit M4, Phillips.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M4.
Application: For optimised use in stationary screw systems.

Order-No.						
01937 2	PH1	33	5.5	M4	8.00	10
01938 9	PH2	33	6.0	M4	8.00	10

7312 Z **Threaded bit M4, Pozidriv.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M4.
Application: For optimised use in stationary screw systems.

Order-No.						
01939 6	PZ1	33	5.5	M4	8.00	10
01940 2	PZ2	33	6.0	M4	8.00	10

7321 Z **Threaded bit M5, Phillips.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M5.
Application: For optimised use in stationary screw systems.

Order-No.						
01942 6	PH2	33	7.0	M5	8.00	10
01943 3	PH2	45	6.0	M5	8.00	10

7322 Z **Threaded bit M5, Pozidriv.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M5.
Application: For optimised use in stationary screw systems.

Order-No.						
01945 7	PZ2	33	7.0	M5	8.00	10
01946 4	PZ2	45	6.0	M5	8.00	10

NEW
7325 Z **Threaded bit M5, TORX®.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M5.
Application: For optimised use in stationary screw systems.

Order-No.						
35400 8	T10	45	6.0	M5	8.00	10
35401 5	T15	45	6.0	M5	8.00	10
35402 2	T20	45	6.0	M5	8.00	10
35403 9	T25	45	6.0	M5	8.00	10

For M6 and 10/32" UNF.

7331 Z **Threaded bit M6, Phillips.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M6.
Application: For optimised use in stationary screw systems.

Order-No.						
04678 1	PH2	33	8.0	M6	8.00	10
04677 4	PH2	45	8.0	M6	8.00	10

7332 Z **Threaded bit M6, Pozidriv.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M6.
Application: For optimised use in stationary screw systems.

Order-No.						
04671 2	PZ2	33	8.0	M6	8.00	10
04670 5	PZ2	45	8.0	M6	8.00	10

7341 Z **Threaded bit 10/32" UNF, Phillips.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread 10/32" UNF.
Application: For optimised use in stationary screw systems.

Order-No.						
01947 1	PH2	45	6.0	10/32 UNF	8.00	10

7342 Z **Threaded bit 10/32" UNF, Pozidriv.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread 10/32" UNF.
Application: For optimised use in stationary screw systems.

Order-No.						
01948 8	PZ2	45	6.0	10/32 UNF	8.00	10

Wiha special bits.

Customised for your application.



Construction Kit	Drive	No.
	C 4	= 0
	C 6,3	= 1
	C 8	= 2
	A 5,5	= 3
	E 6,3	= 5
	G 7	= 6

Profile	No.
Slotted	= 0
Phillips PH	= 1
Pozidriv PZ	= 2
Hex	= 3
TORX®	= 5
TORX PLUS®	= 6
Ball end hex	= 7
Robertson	= 8
Special profile	= 9
Spanner	= 9 SP
Torq-Set®	= 9 TS
Tri-Wing®	= 9 TW

Length: for 25 mm - 152 mm

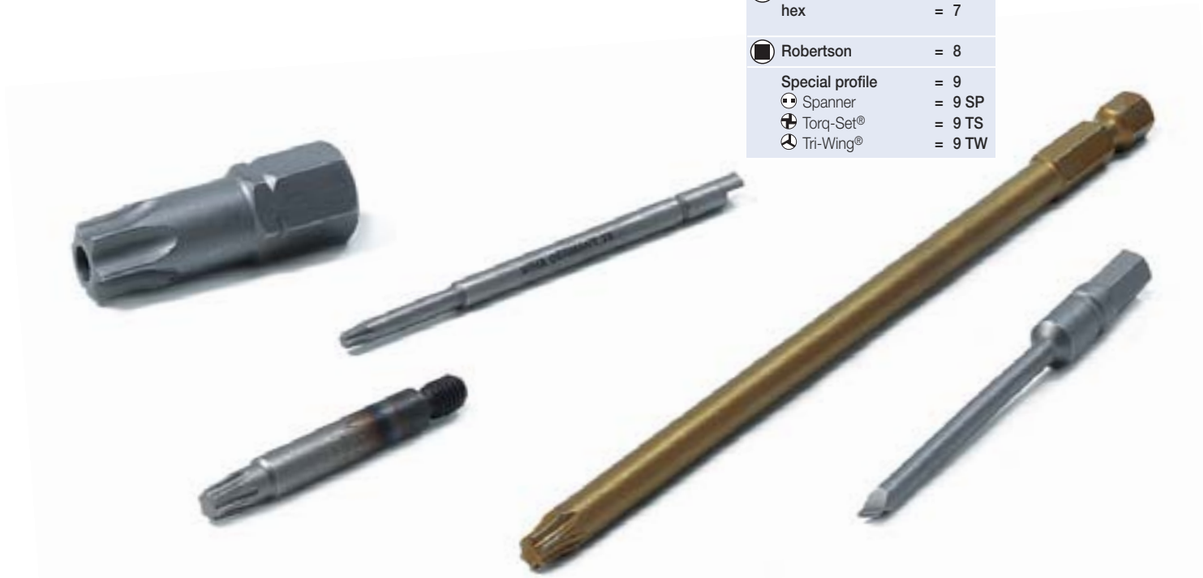

Make the most of our experience. Our expertise in the manufacture of all types of tools for screw applications enables us to produce bits to your specifications.

Sophisticated manufacturing facilities with qualified employees, state-of-the-art machinery and a certified quality assurance system guarantee you maximum quality and flexibility.

The construction of your special bit.



The Wiha special bit programme is a construction system for your custom bit.

Advantages:
- Attractive price
- No additional cost for technical drawings
- Short delivery time
- Flexibility

Wiha Industry Quality – The highest standard of bits.

Industrial-quality tools are an essential part of the Wiha tool kit. We adjust the hardness, coating, shape and concentricity of the bits to your requirements.

Hardness:	57 HRC - 63 HRC
Coating:	Tungsten Carbide (Dura), Diamand, TiN
Style:	According to technical drawing
Straightness:	Guaranteed straightness with a tolerance of +/-0.05 mm.

Perfect concentricity:
Perfect straightness is especially important for bits that must be used in automated machines, production lines or guide jackets.

Advantages:
- Screws will be securely fastened.
- Vibrations are reduced as the bit is balanced.
- Time saving, as straight bits cause less problems.

Wiha special bits.

For ex., Wiha Halfmoon bits.

- Halfmoon bits are predominantly used on production lines for high-tech products, such as hard disks and mobile phones.
- The halfmoon drive ensures a secure fit and straightforward bit exchange.
- Our customers require an exact fit and maximum truth of running for a frictionless production process.
- Wiha bits are being used to optimum effect by big-name companies operating all over the world.

Contact us.
We would be pleased to help.

Wiha bits style C 4.

For screw connections in miniature applications.

These bits fit directly in the machines of the manufacturers: Perret

7000 Z **Standard bit, slotted, style C 4.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

Order-No.				
04728 3	0.8	28	0.20	10
04727 6	1.2	28	0.25	10
04726 9	1.5	28	0.25	10
04725 2	1.8	28	0.30	10
04724 5	2.0	28	0.40	10
04723 8	2.5	28	0.40	10
04722 1	3.0	28	0.50	10
04721 4	3.5	28	0.60	10
04729 0	4.0	28	0.80	10

7005 Z **Standard bit, TORX®, style C 4.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

Order-No.			
20842 7	T3	28	10
20843 1	T4	28	10
04716 0	T5	28	10
04715 3	T6	28	10
04714 6	T7	28	10
04713 9	T8	28	10
04712 2	T9	28	10
04711 5	T10	28	10

7001 Z **Standard bit, Phillips, style C 4.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

Order-No.			
04720 7	PH000	28	10
04719 1	PH00	28	10
04718 4	PH0	28	10
04717 7	PH1	28	10

7003 Z **Standard bit, hex, style C 4.**
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

Order-No.			
04737 5	0.7	28	10
04736 8	0.9	28	10
04735 1	1.3	28	10
04734 4	1.5	28	10
04733 7	2.0	28	10
04732 0	2.5	28	10
04731 3	3.0	28	10
04730 6	4.0	28	10

7110M **Universal holder, magnetic, style E 6.3.**
Suitable for: For bits according to DIN 3126, ISO1173 style C 4.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Suitable for 4 mm bits, e.g. Wiha 7000-7005 series.
Extra: With magnet.

Order-No.				
32505 3	C4	1/4	60	10

Accessories for Wiha bits, style C 4.

2691 **SYSTEM 4 SoftFinish®-telescopic handle.**
Ergonomic multi-component handle with roll-off protection.
Handle: With 4 mm hex retainer for all SYSTEM 4 blades.
Enables adjustable blade lengths from 18 - 90 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Ideal for all precision work in the fields of electronics and mechanics.

Order-No.				
30373 0	4.0	105	23	10

U759 00 **SYSTEM 4 bit holder.**
Suitable for C 4 (4 mm) bits.
Blade: Chrome-vanadium steel, through hardened, electro-plated.

Order-No.					
09195 8	4.0	135	4.0	9	1

ESD-Safe • Telescopic

▶ *See also page 260 – 291*

7000 EB16 ESD **SYSTEM 4 ESD bit set, 16 pcs.**
Mixed sets.
Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10^6 - 10^9 ohms.
Enables adjustable bit holder blade length.
Standards: DIN 3126, ISO 1173, style C 4. IEC 61340-5-1.
Application: Bit set suitable for smallest screws with electronic components.
Flexible working via adjustable blade length and rapid replacement of bit inserts.

Order-No.	Series				
33503 8	**7000 EB16 ESD**				1
	2691ESD	SYSTEM 4 SoftFinish®-telescopic ESD handle			
	U759 00	SYSTEM 4 bit holder			
	U 750	1x2.0	1x3.0		
	U 751	1xPH000	1xPH00	1xPH0	1xPH1
	U 757	1xT3	1xT4	1xT5	1xT6	1xT7
		1xT8	1xT9	1xT10	
	U 753	1x0.7	1x0.9	1x1.3	1x1.5	1x2.0
		1x2.5	1x3.0	1x4.0	

ESD-Safe • Telescopic

▶ *See also page 260 – 291*

7000 EB26 ESD **SYSTEM 4 ESD bit set, 26 pcs.**
Mixed sets.
Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10^6 - 10^9 ohms.
Enables adjustable bit holder blade length.
Standards: DIN 3126, ISO 1173, style C 4. IEC 61340-5-1.
Application: Universal set for especially small screws with electronic components.
Flexible working via adjustable blade length and rapid replacement of bit inserts.

Order-No.	Series				
33848 0	**7000 EB26 ESD**				1
	2691ESD	SYSTEM 4 SoftFinish®-telescopic ESD handle			
	U759 00	SYSTEM 4 bit holder			
	U 750	1x1.5	1x2.0	1x3.0	1x4.0
	U 751	1xPH000	1xPH0	1xPH1	
	U 757	1xT3	1xT4	1xT5	1xT6	1xT7
		1xT8	1xT9	1xT10	
	U 753	1x0.7	1x0.9	1x1.3	1x1.5	1x2.0
		1x2.5	1x3.0	1x4.0	

Wiha bits for drive system style C 8 (5/16") and style G 7.

Style C 8 (5/16").

7020 Z Standard bit, slotted, style C 8.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 8.

Order-No.				
01741 5	5.5	41	0.8	10
01742 2	5.5	41	1.0	10
01744 6	6.5	41	1.2	10
01745 3	8.0	41	1.2	10
01746 0	8.0	41	1.6	10
01747 7	10.0	41	1.6	10
01748 4	12.0	41	2.0	10

7021 Z Standard bit, Phillips, style C 8.

Order-No.			
01749 1	PH1	32	10
01750 7	PH2	32	10
01751 4	PH3	32	10
01753 8	PH4	38	10

7022 Z Standard bit, Pozidriv, style C 8.

Order-No.			
01754 5	PZ1	32	10
01755 2	PZ2	32	10
01756 9	PZ3	32	10
01758 3	PZ4	38	10

7025 Z Standard bit, TORX®, style C 8.

Order-No.			
01765 1	T25	35	10
01766 8	T27	35	10
01767 5	T30	35	10
01768 2	T40	35	10
01769 9	T45	35	10
01770 5	T50	35	10
01771 2	T55	35	10

7023 Z Standard bit, hex, style C 8.

Order-No.			
01759 0	3.0	30	10
01760 6	4.0	30	10
01761 3	5.0	30	10
01762 0	6.0	30	10
01763 7	8.0	30	10
01764 4	10.0	30	10

Style G 7.

7081 ZOT ZOT Torsion bit, Phillips, style G 7.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style G 7.

Order-No.			
04960 7	PH1	53	5
04961 4	PH2	53	5
04962 1	PH3	53	5

7082 ZOT ZOT Torsion bit, Pozidriv, style G 7.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style G 7.

Order-No.			
04553 1	PZ1	53	5
04552 4	PZ2	53	5
04551 7	PZ3	53	5

7183 Universal holder, magnetic/retaining ring, style G 7.
Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style G 7.
Application: For applications where the bit must be held tight e.g. assembly lines.

Order-No.				
01919 8	1/4	G7	72	10

Wiha CentroFix system.

Quick and professional.

Drilling, countersinking, driving screws and cutting threads is child's play with the Wiha CentroFix System. The innovative CentroFix quick-release holder forms the basis for a variety of hex-driven tools.

With CentroFix System, Wiha once again demonstrates that the user is central. The trend towards battery-powered drivers is continuing undiminished. Efficient models are greatly increasing the number of application areas and enabling more flexible working conditons. The Wiha CentroFix System also opens up these application areas to professional use.

With the CentroFix quick-release holder, Wiha closes the gap between the chuck of the battery-powered drivers and the quick-release holder for driver bits. The CentroFix holder allows rapid tool change, provides a secure fit and meets the more demanding requirements for concentricity and pull-off forces.

Flexible, easy and quick – drill, countersink and turn screws with the Wiha CentroFix System for wood ...

... or with the Wiha CentroFix System for metal.

Wiha CentroFix system.

- **Quick**
  Saves time when changing tools
- **Secure**
  Fixed connection between tool insert and holder
- **Zero-play**
  For exact boreholes
- **Universal**
  Fits all 1/4" hex drives

CentroFix – one for all.

7148C CentroFix quick release holder, style E 6.3.
Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold.
Optimised for the use of drill bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive.
The play between bit and holder is reduced to a minimum.
Real single-handed operation for fast bit exchange.

Order-No.				
32477 3	1/4	1/4	60	10

▶ *NEW: CentroFix quick release holder with magnet, see page 148*

Wiha drill bits.

Just keep on working.

Wood twist drill bit.

7804 **Wood twist drill bit, style C 6.3.**

Material: High grade chrome-molybdenum steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Especially suitable for boreholes in soft and hardwoods, as well as in veneered and coated laminated materials.
Extra: By means of careful rough-cutting, drilling of pocket holes is easy and does not tear the material.
With centring tip for exact drilling.
Particularly suitable for use in battery-powered drivers.

Order-No.					
27873 1	3.0	70	36	1/4	10
27876 2	4.0	75	43	1/4	10
27877 9	5.0	85	56	1/4	10
27879 3	6.0	95	66	1/4	10
27880 9	8.0	110	81	1/4	10
27881 6	10.0	110	81	1/4	10

79184 T1 **Wood twist drill set, 19 pcs.**

Pouch: High-quality nylon pouch, 13 x 2 x 10 cm.
Bits: 25 mm Standard and Torsion bits, wood twist drill bits, countersink bit.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: Compact range for drilling, countersinking and driving screws in wood.
Extra: Pouch with sturdy metal belt clip.

Order-No.	Series					
28024 6	79184 T19					1
	7804	1x3.0	1x4.0	1x5.0	1x6.0	1x8.0
	7806	1x12.4				
	7011 ZOT	1xPH2				
	7012 ZOT	1xPZ1	3xPZ2	1xPZ3		
	7015 Z	1xT15	1xT20	1xT25	1xT30	
	7019 Z SIT	1xSIT 20	1xSIT 30			
	7148C	CentroFix quick release holder, style E 6.3				

7918 TL **Nylon pouch, empty.**

Order-No.	Series	
28028 4	7918 TL	1

Twist drill bit.

7805 **Twist drill bit, style C 6.3.**

Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Universal application in metal, plastic and wood.
Extra: Particularly suitable for use in battery-powered drivers.
Special rivet-hole sizes 3.1, 4.1 and 5.1.

Order-No.					
27882 3	3.0	38	16	1/4	10
28055 0	3.1	38	16	1/4	10
27883 0	3.3	40	18	1/4	10
27884 7	4.0	43	22	1/4	10
28056 7	4.1	43	22	1/4	10
27885 4	4.2	43	22	1/4	10
27886 1	5.0	48	26	1/4	10
28057 4	5.1	48	26	1/4	10
27887 8	6.0	48	26	1/4	10
27888 5	6.8	48	30	1/4	10
27889 2	8.0	50	32	1/4	10
27890 8	8.5	51	34	1/4	10
27891 5	10.0	54	37	1/4	10

79185 T1 **Twist drill set, 19 pcs.**

Pouch: High-quality nylon pouch, 13 x 2 x 10 cm.
Bits: 25 mm Standard and Torsion bits, twist drill bits.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: Compact assortment for universal application when driving screws.
Extra: Pouch with sturdy metal belt clip.

Order-No.	Series					
28025 3	79185 T19					1
	7805	1x3.0	1x4.0	1x4.2	1x5.0	1x6.0 1x8.0
	7011 ZOT	2xPH1	3xPH2	1xPH3		
	7012 ZOT	2xPZ2				
	7015 Z	1xT15	1xT20	1xT25	1xT30	
	7148C	CentroFix quick release holder, style E 6.3				

Combination drill bit. Countersink bit.

7807 **Combination drill bit, style C 6.3.**

Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Drilling, cutting threads and burring.
For assembly work, repair and rethreading.
Can be used in metal and plastic.
Extra: Three applications in a single work step.
Particularly sutiable for use in battery-powered drivers.

Order-No.				
27897 7	M3	36	1/4	10
27898 4	M4	39	1/4	10
27899 1	M5	41	1/4	10
27900 4	M6	44	1/4	10
27901 1	M8	51	1/4	10
27963 9	M10	65	1/4	10

79187 B5 **Combination drill bit set, 5 pcs.**

Extra: In plastic box.

Order-No.	Series					
28026 0	79187 B5					1
	7807	M3x36	M4x39	M5x41	M6x44	M8x51

7806 **Countersink bit, style C 6.3.**

Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Universal application in metal, plastic and wood.
Extra: Particularly suitable for use in battery-powered drivers.
Guarantees outstanding removal of cuttings, no-rattle operation and smooth surface.

Order-No.					Ø min.	
27892 2	6.3	35	1/4	M3	1.5	10
27893 9	8.3	35	1/4	M4	2.0	10
27894 6	10.4	35	1/4	M5	2.5	10
27895 3	12.4	35	1/4	M6	2.8	10
27896 0	16.5	35	1/4	M8	3.2	10
28058 1	20.5	35	1/4	M10	3.5	10

79186 B5 **Countersink set, 5 pcs.**

Extra: In plastic box.

Order-No.	Series					
28027 7	79186 B5					1
	7806	6.3x35	8.3x35	10.4x35	12.4x35	16.5x35

Universal drill bit.

7848 **Universal drill bit, style E 6.3.**

Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: 1/4" hex universal drill in accordance with DIN 3126, style E 6.3.
Application: For use in (battery-powered) screwdrivers; suitable for drilling holes in a multitude of materials (light masonry, light building materials, non-ferrous metal, metal, wood, plastics etc.) as well as light drilling on smooth and hard surfaces.
Extra: Exact drilled holes via the special cutting edge. Especially long service life.

Order-No.					
32292 2	4	85	45	1/4	10
32293 9	5	96	50	1/4	10
32294 6	6	101	60	1/4	10
32295 3	7	101	60	1/4	10
32296 0	8	120	70	1/4	10
32297 7	10	120	70	1/4	10

281-02 **Bit holder with handle, magnetic, 1/4".**

Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO1173 style C 6.3 and E 6.3.
Application: Compact screwdriver together with bits, 1/4".
Together with Wiha countersink bits, can be used as manual deburrer.

Order-No.				
32160 4	1/4	125	36	1

Wiha nut driver product line.

The entire line for hand and machine use.

All those who place demanding requirements on their tools will find what they're looking for in the extensive Wiha nut driver product line for hand and machine use.
For example, the high-quality (hexagon) nut driver inserts stand up to especially heavy loading. Another advantage is their hexagon opening with rounded corners: It grasps even flat bolts easily and extremely gently.
With the incorporated permanent magnet and optional bit holder, particular attention was also paid to practical, user-friendly details.
A remedy for tough cases: The new hand impact screwdriver with hand protection and a changeover function is a specialist for jammed bolts and nuts. The matching 5/16" bits for Phillips, slotted and TORX® drives are produced of special chrome vanadium steel and through-hardened to make them especially impact and break-resistant.

The jack-of-all-trades product line is rounded off with universal connection pieces/parts and smooth-running ratchets. With a universal joint (connection pieces) and a locking button (ratchets) for holding or quickly releasing the attached tools, they're excellently equipped for working in hard-to-reach places.
The 3-component handle (SoftFinish®) of the ratchets also guarantees comfortable, safe use.

Whether tools or accessories, whether its hand or machine-operated nut drivers: With this versatile assortment the user is also equipped for difficult and special cases.

Wiha nut driver product line.

- Extensive application possibilities and large range of tools for electric and pneumatic screwdrivers and hand-operated nut drivers
- Nut driver inserts (1/4" drive) in high-quality special chrome vanadium steel; also available with incorporated permanent magnet that safely guides the screws when installing
- Hand impact screwdriver with hardened, lacquered impact end against chipping of chrome parts or mushroom-shaped deformations (p. 145)

For machine-operated nut driver inserts.

7244 **Power nut driver insert, hex - style E 6.3.**

Material: High-quality chrome vanadium alloy steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For mechanical fastening and unfastening.
Extra: Rounded hex opening in the corners for protection of the screw heads.

Order-No.	O	Ø		
32513 8	5.5	9	50	5
32514 5	7	11	50	5
32515 2	8	12	50	5
32516 9	10	14	50	5
32517 6	12	17	50	5
32518 3	13	18	50	5
32519 0	1/4	10	50	5

7244M **Power nut driver insert, hex with magnet - style E 6.3.**

Material: High-quality chrome vanadium alloy steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For mechanical fastening and unfastening.
Extra: With a powerful permanent magnet incorporated in brass.
Rounded hex opening in the corners for protection of the screw heads.

Order-No.	O	Ø		
32520 6	5.5	9	50	5
32521 3	6	10	50	5
32522 0	7	11	50	5
32523 7	8	12	50	5
32524 4	10	14	50	5
32525 1	12	17	50	5
32526 8	13	18	50	5
32528 2	1/4	10	50	5
32530 5	5/16	12	50	5
32529 9	3/8	14	50	5
32527 5	1/2	17	50	5

For machine-operated nut driver inserts.

7204 **Power hex nut driver, 1/4" drive.**

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129, ISO 2725-2.
Application: For tightening and loosening hex screws with electric or pneumatic screwdrivers (rotary or impact screwdrivers).
Extra: Rounded hex opening in the corners for protection of the screw heads.

Order-No.	O	Ø	Ø		
32531 2	5.5	9.4	13	23	1
32532 9	6	10.0	13	23	1
32533 6	7	11.3	13	23	1
32534 3	8	12.5	13	23	1
32535 0	10	15.0	13	23	1
32536 7	12	17.5	13	23	1
32537 4	13	18.8	13	23	1
32538 1	1/4	10.0	13	23	1
32539 8	5/16	12.5	13	23	1
32540 4	3/8	15.0	13	23	1

7204M **Power hex nut driver with magnet, 1/4" drive.**

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129, ISO 2725-2.
Application: Mainly for fastening and unfastening in self-tapping sheet metal screws with electric or pneumatic screwdrivers (rotary or impact screwdrivers). The magnet simplifies the guidance of the screws while fastening.
Extra: With a powerful permanent magnet incorporated in brass.
With 0.03 mm raised cladding in comparison to the standard model for a considerably increased service life.
Due to the rounded hex opening, flat screws can easily be gripped.

Order-No.	O	Ø	Ø		
32541 1	7	11.6	13	23	1
32542 8	8	12.8	13	25	1
32543 5	10	15.3	13	28	1
32544 2	13	19.1	13	30	1
32545 9	1/4	10.3	13	23	1

7205 **Power nut driver insert: TORX®,1/4" insert.**

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129.
Application: For external TORX® screws and self-tapping screws with TORX® head. Suitable for electric or pneumatic screwdrivers (rotary or impact screwdrivers).

Order-No.		Ø	Ø		
32550 3	E6	8.7	13	23	1
32551 0	E8	9.2	13	23	1
32552 7	E10	12.2	13	23	1

Wiha nut driver product line.

The entire line for hand and machine use.

For machine-operated nut driver inserts.

7241Z **Power connection piece with ball.**

Standards: External square drive in accordance with DIN 3120.
Material: High-quality chrome vanadium alloy steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For use with machine-operated nut drivers.

Order-No.				
32508 4	1/4	1/4	35	5
32509 1	1/4	1/4	50	5
32510 7	1/4	1/4	100	5
32511 4	3/8	1/4	50	5
32512 1	1/2	1/4	60	5

24633 **Power universal joint with ball (machine operation).**

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3121.
Application: Makes working in hard-to-reach places easier in connection with machine-operated nut drivers.
Extra: 1/4" insert with ball and joint.

Order-No.				
32553 4	1/4	1/4	75	1

24634 **Power extension piece.**

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3121.
Application: Extension for machine-operated nut driver.
Extra: 1/4" insert.

Order-No.				
32554 1	1/4	1/4	75	1

For machine-operated nut driver inserts.

7204Z **Bit insert: Bit holder.**

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3126.
Application: For use of C 6.3 bits.

Order-No.				
32546 6	1/4	1/4	36	1
32548 0	1/4	3/8	40	1
32549 7	1/4	1/2	48	1

7204K39 **Complete nut driver and bit set for hand and machine use, 37 pcs.**

Content:

Hand use:
- 24630 ratchets, 1/4" with SoftFinish® handle
- 24632 T-handle
- 24635 universal joint
- 24637 bit holder for C 6.3 bits
- 7011Z PH1, PH2, PH3
- 7012Z PZ1, PZ2, PZ3
- 7015Z T10, T15, T20, T25, T30
- 28101 Stubby with magnet

Machine use:
- 7244M with magnet, size 6, 8, 10
- 7241Z connection piece, 50 mm
- 24634 extension piece
- 72050 TORX® nut driver E6, E8, E10
- 72040 hex nut driver, size 5.5, 6, 7, 8, 10, 12, 13 mm
- 7204Z bit holder for E 6.3 bits
- 7045Z T10, T15, T20, T25, T30

Order-No.	Series	
32818 4	7204K39	1

For hand used nut driver sockets.

7044 **Standard bit, socket-wrench insert, style E 6.3.**

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.			
04514 2	5.0	55	5
04513 5	5.5	55	5
04512 8	6.0	55	5
04511 1	7.0	55	5
04510 4	8.0	55	5
04509 8	10.0	55	5
04508 1	13.0	55	5
04515 9	1/4	55	5
04516 6	5/16	55	5
04517 3	3/8	55	5

7044 M **Standard bit, nut driver insert, magnetic, style E 6.3.**

Application: For a secure hold on screws.
Extra: With strong permanent magnet.

Order-No.			
04637 8	5.0	55	5
04636 1	5.5	55	5
04635 4	6.0	55	5
04634 7	7.0	55	5
04633 0	8.0	55	5
04632 3	10.0	55	5
04631 6	13.0	55	5
04638 5	1/4	55	5
04639 2	5/16	55	5
04640 8	3/8	55	5

24632 **T-handle.**

Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
Drive: DIN 3120.
Application: For hand used nut driver sockets.

Order-No.			
32557 2	1/4	115	1

24635 **Universal joint (hand operation).**

Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
Drive: DIN 3123.
Application: For working in hard-to-reach places with hand-operated nut drivers.
Extra: Easier joint operation.

Order-No.				
32555 8	1/4	1/4	33	1

For hand used nut driver sockets.

24630 **Ratchets with SoftFinish® handle.**

Design: Ratchet wheel with 20 teeth, extremely smooth-running and resilient. With proven Wiha SoftFinish® multi-component handle for more safety when working.
Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
Drive: DIN 3122, style D 6.3.
Application: For hand-operated nut driver inserts.
Extra: The locking button ensures secure holding of the nut driver and quick release of the attached tool.

Order-No.			
32629 6	1/4	140	1

24631 **Ratchets with joint and SoftFinish® handle.**

Design: Ratchet wheel with 20 teeth, extremely smooth-running and resilient. With proven Wiha SoftFinish® multi-component handle for more safety when working.
Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
Drive: DIN 3122, style D 6.3.
Application: The articulated head makes working in hard-to-reach places with nut drivers easier.
Extra: The locking button ensures secure holding of the nut driver and quick release of the attached tool.

Order-No.			
32630 2	1/4	165	1

24637 **Bit insert: Bit holder.**

Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
Drive: DIN 3126.
Application: For use of C 6.3 bits.

Order-No.				
33230 3	1/4	1/4	22	1

Wiha adapters.

For hand used nut driver sockets.

7210 **Tool shaft, style C 6.3.**
Suitable for: DIN 3120, ISO 1174, style A 6.3 + A 10.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For hand used nut driver sockets.

Order-No.				
01933 4	**1/4**	**1/4**	25	5
04204 2	**3/8**	**1/4**	30	5

7201 **Connecting device with retaining ring, style G 6.3 + G 10 + G 12.5.**
Suitable for: DIN 3126, ISO 1173, style D 6.3 and D 8.
Drive: DIN 3121, ISO 1174, style G 6.3 + G 10 + G 12.5.
Application: Suitable for bits C 6.3 and C 8.

Order-No.					
01924 2	**1/4**	**1/4**	25	D 6.3	2
01926 6	**1/4**	**3/8**	30	D 6.3	2
01927 3	**5/16**	**3/8**	30	D 8	2
01923 5	**5/16**	**1/2**	35	D 8	2

For hand used nut driver sockets.

7230 **Tool shaft, style A 5.5.**
Standards: Adapter DIN 7428.
Suitable for: DIN 3121, ISO 1174, style F 6.3.
Drive: DIN 3126, ISO 1173, style A 5.5.
Application: For machine used nut driver sockets.

Order-No.				
01934 1	**1/4**	**5.5**	50	5

7240 **Tool shaft, style E 6.3.**
Standards: Adapter DIN 7428.
Suitable for: DIN 3121, ISO 1174, style F 6.3 and F 10.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For machine used nut driver sockets.

Order-No.				
04685 9	**1/4**	**1/4**	100	5
01935 8	**1/4**	**1/4**	50	5
04684 2	**3/8**	**1/4**	100	5
04362 9	**3/8**	**1/4**	50	5

7280 **Tool shaft, style G 7.**
Suitable for: DIN 3121, ISO 1174, style F 6.3.
Drive: DIN 3126, ISO 1173, style G 7.
Application: For machine used nut driver sockets.

Order-No.				
01936 5	**1/4**	**7**	75	5

Wiha impact screwdriver assortment.

The complete range.

Impact screwdriver and bits.

7050 **5/16" impact screwdriver bits, slotted.**
Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style C 8.
Application: For slotted screws for use in impact screwdrivers.
Extra: Especially impact-resistant.

Order-No.					
32561 9	**9**	**1.6**	5/16	32	5
32562 6	**11**	**1.6**	5/16	32	5
32563 3	**14**	**2.0**	5/16	32	5

7051 **5/16" impact screwdriver bits, Phillips.**
Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style C 8.
Application: For Phillips screws for use in impact screwdrivers.
Extra: Especially impact-resistant.

Order-No.				
32558 9	**PH2**	**5/16**	32	5
32559 6	**PH3**	**5/16**	32	5
32560 2	**PH4**	**5/16**	32	5

7055 **5/16" impact screwdriver bits, TORX®.**
Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style C 8.
Application: For TORX® screws for use in impact screwdrivers.
Extra: Especially impact-resistant.

Order-No.				
32564 0	**T30**	**5/16**	32	5
32565 7	**T40**	**5/16**	32	5
32566 4	**T45**	**5/16**	32	5
32567 1	**T50**	**5/16**	32	5

Impact screwdriver and bits.

24636 **Hand impact screwdriver.**
Material: High-quality chrome-molybdenum steel, through-hardened, with hand protection.
Drive: Square 1/2".
Application: For loosening jammed screws or nuts together with the Wiha 5/16" impact bits and holder.
Extra: The insert is hardened and lacquered at the impact end to prevent the chipping of chrome parts or mushroom-shaped deformations.

Order-No.			
32556 5	**1/2**	**163**	1

7204Z **Bit insert: Bit holder.**
Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
Drive: DIN 3120.
Application: For use of C 8 bits.
Required for use with hand impact screwdriver, series 24636.

Order-No.				
32547 3	**5/16**	**1/2**	38	1

24636 B5 **5/16" impact screwdriver bit set.**
Material: High-quality chrome-molybdenum steel, through-hardened, with hand protection.
Drive: For 1/2" nuts, also suitable for 5/16" bits with adapter.
Application: Set for loosening jammed screws or nuts with the Wiha 5/16" impact bits and holder.
Extra: The insert is hardened and lacquered at the impact end to prevent the chipping of chrome parts or mushroom-shaped deformations.

Order-No.	Series			
32573 2	**24636 B5**			1
	24636	Hand impact screwdriver		
	7050	9x1.6	11x1.6	
	7051	PH2x5/16	PH3x5/16	
	7204Z	Bit holder		

Wiha Gripper.

Siezes everything.

Gripper.

9246 01 **Gripper nut driver 3/8".**

Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.
Drive: DIN 3120, style C 10.
Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a heigth of 8 mm.
Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

Order-No.				
09400 3	**3/8**	**25.4**	53.5	10

SB 246 01 **Gripper nut driver, 3/8" blister packed.**

Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.
Suitable for: DIN 3120, style C 10.
Packaging: Blister packed.
Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a heigth of 8 mm.
Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

Order-No.				
20554 6	**3/8**	**25.4**	53.5	10

Gripper compact set.

SB 246 02 **Gripper compact set, 3 pcs.**
Consists of Gripper nut driver, ratchet 3/8" and adapter for portable electric drills.

Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.
Drive: DIN 3120, style C 10.
Packaging: Blister packed.
Content: Gripper nut driver 3/8"
Ratchet 3/8"
Adapter 3/8"
Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a heigth of 8 mm.
Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

Order-No.	Series		
20783 0	**SB 246 02**		1
	9246 01	Gripper nut driver 3/8"	
	246 05	Ratchet 3/8"	
	246 03	Adapter 3/8"	

Wiha CentroFix.

One for all.

CentroFix, the star of the Wiha bit holders. It convinces with an unbelievable diversity of application. With its innovative mechanism this bit holder holds all common bit types with 1/4" hex drive.

The holding mecahnism was newly developed especially for bits from the CentroFix system series (drill bits, catalogue pages 137-139). The result is optimised rotation characteristics and reduced play between bit and holder.

In addition the CentroFix quick release holder enables distinctly easier work for all craftsmen and handymen. Because especially on ladders or scaffolding, the CentroFix quick release holder offers added safety and time-saving with real single-handed operation for quick bit changing.

The CentroFix quick-release holder makes work much easier for all professionals and semi-professionals.

Push sleeve forward.

Take out bit.

Insert new bit.

Push sleeve back.

Wiha CentroFix.

- Fits all bits with 1/4" hex drive with styles C6.3 and E6.3
- Real one-hand application for quick bit change
- The play between bit and holder is reduced to a minimum, particularly important when drilling
- Guarantees high retention forces, necessary when drilling wood
- Slender metal corpus with ergonomically styled, functional sleeve withstands even the greatest stresses when driving screws and drilling

Wiha bit holder for power machines.

Drive system style E 6.3.

NEW

7148CM **CentroFix quick release holder, magnetic, style E 6.3.**

Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold.
Optimised for the use of drill bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive.
The play between bit and holder is reduced to a minimum.
Real single-handed operation for fast bit exchange.

Order-No.				
35386 5	1/4	1/4	60	10

7148C **CentroFix quick release holder, style E 6.3.**

Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold.
Optimised for the use of drill bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive.
The play between bit and holder is reduced to a minimum.
Real single-handed operation for fast bit exchange.

Order-No.				
32477 3	1/4	1/4	60	10

7149 **ClicFix quick release holder, magnetic, style E 6.3.**

Sleeve: Aluminium anodized.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For applications where the bit must be held tight e.g. assembly lines.
Extra: Real single-handed operation for fast bit exchange.

Order-No.				
24770 6	1/4	1/4	60	10

Drive system style E 6.3.

7140 **Universal holder, with retaining ring, style E 6.3.**

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For applications where the bit must be held tight e.g. assembly lines.
Extra: One piece construction.

Order-No.				
01910 5	1/4	1/4	57	10

7110M **Universal holder, magnetic, style E 6.3.**

Suitable for: For bits according to DIN 3126, ISO 1173 style C 4.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Suitable for 4 mm bits, e.g. Wiha 7000-7005 series.
Extra: With magnet.

Order-No.				
32505 3	C4	1/4	60	10

7142 **Universal holder, magnetic/ retaining ring, style E 6.3.**

Sleeve: Copper beryllium.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Copper-beryllium alloys prevent ignitable sparks and reduce the danger of explosion.
Tools made of copper-beryllium are often use in potentially explosive areas.

Order-No.				
01912 9	1/4	1/4	73	10

7143 **Universal holder, magnetic/ retaining ring, style E 6.3.**

Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For applications where the bit must be held tight e.g. assembly lines.

Order-No.				
01913 6	1/4	1/4	72	10

Drive system style E 6.3, G 7 and SDS-Plus®.

7113 **Universal holder, magnetic, style E 6.3.**

Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.

Order-No.				
01894 8	1/4	1/4	74	10

7113 S **Universal holder, magnetic, style E 6.3.**

Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.

Order-No.				
01895 5	1/4	1/4	58	10

7183 **Universal holder, magnetic/retaining ring, style G 7.**

Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style G 7.
Application: For applications where the bit must be held tight e.g. assembly lines.

Order-No.				
01919 8	1/4	G7	72	10

NEW

7180-7 **Quick release holder, magnetic, SDS-Plus®.**

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: SDS-Plus®.
Application: For SDS-Plus® chuck.
Extra: All hammer drills become powerful screwdrivers with this bit holder.

Order-No.				
26255 6	1/4	SDS-Plus®	100	10

Offset screwdriver.

57 Nm

SB24628 **High-performance offset screwdriver with a 105° angled head.**

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Material: Steel housing, matte gold-plated.
Application: For use in almost any (battery-powered) screwdriver; ideal for drilling and fastening/ unfastening in hard-to-reach places, corners and edges.
Extra: A hand-operated locking sleeve ensures an optimal hold of all 1/4" inserts such as bits, drill bits and countersink bits.
Stabilisation arm, adjustable in 48 positions; torque transmission up to 57 Nm.
Compact, slim design.

Order-No.				
32310 3	1/4	1/4	165	1

14 Nm

SB24629 **Offset screwdriver with a 105° angled head, magnetic.**

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Material: Die cast housing, matte gold-plated.
Application: For use in battery-powered and hand-held screwdrivers; ideal for drilling and fastening in hard-to-reach places, corners and edges.
Extra: Stabilisation arm, adjustable in 12 positions; torque transmission up to 14 Nm.
Compact, slim design.

Order-No.				
32311 0	1/4	1/4	130	1

Wiha bit holder with handle.

Bit holder 1/4".

384 **Bit holder with handle, magnetic, 1/4".**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.

Order-No.					
01475 9	1/4	125	225	36	10
01476 6	1/4	300	400	36	5

386 **Bit holder with handle, flexible shaft, 1/4".**
Blade: Plastic coated flexible metal.
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: With retaining ring.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: For offset screws.

Order-No.					
01479 7	1/4	150	268	36	10

387 **Bit holder with handle, quick release holder, 1/4".**
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: ClicFix quick release holder, magnetic.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: Compact, handy style for working in confined spaces.
For applications where the bit must be held tight.

Order-No.					
25874 0	1/4	35	146	30	10

281-02 **Bit holder with handle, magnetic, 1/4".**
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Application: Compact screwdriver together with bits, 1/4".
Together with Wiha countersink bits, can be used as manual deburrer.

Order-No.				
32160 4	1/4	125	36	1

Bit holder 1/4".

281 01 **Bit holder with handle, magnetic, 1/4".**
Handle: Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: For working in confined spaces.
Extra: Together with Wiha countersink bits, can be used as manual deburrer.

Order-No.				
29463 2	1/4	57	34	10

388 **Bit holder with handle, magnetic, 1/4".**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha T-handle.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: For high torques.

Order-No.				
01481 0	1/4	150	80	10

388DS **Bit holder with handle, magnetic, 1/4".**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha ComfortGrip multi-component T-handle.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: For high torques.
Extra: Two bit holders for 1/4" bits make this a universal tool.
Bit holder on the side for particularly high torque.

Order-No.				
26179 5	1/4	150	100	10

Wiha magazine bit holder.

Everything in the palm of your hand.

reddot design award
best of the best 2008

The Wiha magazine bit holder is ideal for all users needing several screw or screwdriver types for work within a short space of time. Thanks to its compact size it fits into every toolbox. The ergonomically designed handle of soft, skin-friendly material guarantees comfortable handling as well. This new solution for storing and extracting bits has already convinced juries of experts, winning the coveted "red dot design award: best of the best".

Small format – great professional quality: the Wiha Stubby magazine bit holder features a clever magazine for accommodating six bits. With the short-length, ergonomic Wiha SoftFinish® multi-component handle it allows comfortable working in confined places.

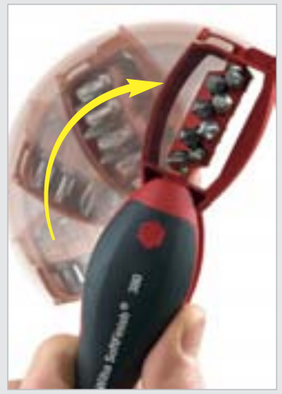

The bit magazine accommodated by the handle is swung open with a light press of the thumb. The bits can then be quickly and simply changed.

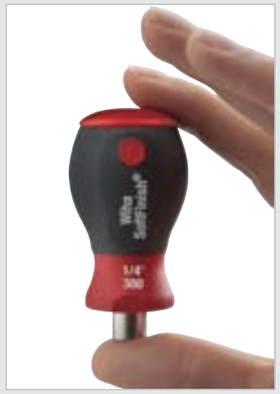

Handy, compact and particularly suitable for working in confined spaces.

Wiha magazine bit holder.

- Unique fold-out mechanism
- Eight screwdrivers in one – for timesaving, effective working
- Magnetic fixing function
- Ergonomic SoftFinish® zone
- Handy & compact

Wiha magazine bit holder Stubby.

- Gets everywhere
- Has six bits in the cap
- Fits perfectly in your hand
- Professional quality Made in Germany
- Ideal for professional work in confined spaces

Wiha magazine bit holder.

Eight screwdrivers in one.

Magazine bit holder 1/4", magnetic.

38090101 Magazine bit holder, magnetic, 1/4".

Blade: High grade chrome-vanadium steel, through hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: DIN 3126, ISO 1173, style D 6.3.
Bits: 25 mm Standard bits.
Application: The alternative to a screwdriver set.
Eight drive shapes in one screwdriver.

Order-No.	Series				
32901 3	38090101				5
	7010 Z	1x6.5			
	7011 Z	1xPH1	1xPH2	1xPH3	
	7012 Z	1xPZ2			
	7015 Z	1xT15	1xT20	1xT25	

SB 38090101 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series	
33007 1	SB 38090101	5

38090101 VH Magazine bit holder, display, 10 pcs.
Sales display made of card with integrated rear panel.

Order-No.	Series-No.	Content	
33244 0	38090101 VH	10 x 38090101	1
33245 7	38090102 VH	10 x 38090102	1
33246 4	38090103 VH	10 x 38090103	1
33247 1	38090104 VH	10 x 38090104	1

Magazine bit holder 1/4", magnetic.

38090102 Magazine bit holder, magnetic, 1/4".

Order-No.	Series					
32902 0	38090102					5
	7015 Z	1xT6	1xT8	1xT10	1xT15	
		1xT20	1xT25	1xT30	1xT40	

SB 38090102 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series					
33008 8	SB 38090102					5
	7015 Z	1xT6	1xT8	1xT10	1xT15	
		1xT20	1xT25	1xT30	1xT40	

38090103 Magazine bit holder, magnetic, 1/4".

Order-No.	Series				
32903 7	38090103				5
	7010 Z	1x5,5	1x6,5		
	7011 Z	1xPH1	3xPH2	2xPH3	

SB 38090103 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33009 5	SB 38090103				5
	7010 Z	1x5,5	1x6,5		
	7011 Z	1xPH1	3xPH2	2xPH3	

38090104 Magazine bit holder, magnetic, 1/4".

Order-No.	Series				
32904 4	38090104				5
	7010 Z	1x5,5	1x6,5		
	7012 Z	1xPZ1	3xPZ2	2xPZ3	

SB 38090104 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33010 1	SB 38090104				5
	7010 Z	1x5,5	1x6,5		
	7012 Z	1xPZ1	3xPZ2	2xPZ3	

Wiha magazine bit holder Stubby.

The Stubby with six bits in its cap.

Magazine bit holder 1/4", magnetic.

380101 Magazine bit holder Stubby, magnetic, 1/4".

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: DIN 3126, ISO 1173, style D 6.3.
Bits: 25 mm Standard bits.
Application: The alternative to a screwdriver set.
Six drive shapes in one screwdriver.
For working in confined spaces.

Order-No.	Series			
33736 0	380101			10
	7010 Z	1x4.5	1x6.5	1x8.0
	7011 Z	1xPH1	1xPH2	1xPH3

SB 380101 Magazine bit holder Stubby, magnetic, 1/4".
Blister packed.

Order-No.	Series			
33738 4	SB 380101			10
	7010 Z	1x4.5	1x6.5	1x8.0
	7011 Z	1xPH1	1xPH2	1xPH3

380101 VH Magazine bit holder Stubby, display, 10 pcs.
Sales display made of card with integrated rear panel.

Order-No.	Series-No.	Content	
33739 1	380101 VH	10 x 380101	1
Order-No.			
33742 1	380102 VH	10 x 380102	1
Order-No.			
33745 2	380103 VH	10 x 380103	1
Order-No.			
33747 6	380104 VH	10 x 380104	1

Magazine bit holder 1/4", magnetic.

380102 Magazine bit holder Stubby, magnetic, 1/4".

Order-No.	Series			
33740 7	380102			10
	7011 Z	1xPH1	1xPH2	1xPH3
	7012 Z	1xPZ1	1xPZ2	1xPZ3

SB 380102 Magazine bit holder Stubby, magnetic, 1/4".
Blister packed.

Order-No.	Series			
33741 4	SB 380102			10
	7011 Z	1xPH1	1xPH2	1xPH3
	7012 Z	1xPZ1	1xPZ2	1xPZ3

380103 Magazine bit holder Stubby, magnetic, 1/4".

Order-No.	Series			
33743 8	380103			10
	7015 Z	1xT10	1xT15	1xT20
		1xT25	1xT30	1xT40

SB 380103 Magazine bit holder Stubby, magnetic, 1/4".
Blister packed.

Order-No.	Series			
33744 5	SB 380103			10
	7015 Z	1xT10	1xT15	1xT20
		1xT25	1xT30	1xT40

380104 Magazine bit holder Stubby, magnetic, 1/4".

Order-No.	Series			
33764 3	380104			10
	7010 Z	1x4.5	1x6.5	1x8.0
	7012 Z	1xPZ1	1xPZ2	1xPZ3

SB 380104 Magazine bit holder Stubby, magnetic, 1/4".
Blister packed.

Order-No.	Series			
33746 9	SB 380104			10
	7010 Z	1x4.5	1x6.5	1x8.0
	7012 Z	1xPZ1	1xPZ2	1xPZ3

Wiha XSelector and XLSelector.

Couldn't be smaller!

The range of Wiha bit selectors is distinguished by incredible compactness and ingeniously simple bit removal.

With the new 31-piece XLSelector and the 11-piece XSelector, Wiha offers an optimum range that has been tailored to user requirements.

The proven colour-coding system facilitates identification of the various bit qualities.

The XLSelector is extremely flat and compact and fits in every case.



The Wiha XSelector: bit removal couldn't be easier.

Protector with System Loop: for attaching the 11-piece XSelector to a belt or for wall-mounting.

Wiha XLSelector.

- Extremely flat and compact bit box, stocked with 30 bits and bit holder
- Bit box with soft zones for a non-slip grip and comfortable handling
- Removal of the bits couldn't be easier
- With dimensions of just 135 x 80 x 17.5 mm, it even fits into a shirt or trouser pocket
- Due to its compactness, it's ideal for storing in a toolbox

Wiha XSelector.

- Compact, smart, tidy!
- Equipped with 10 bits and bit holder
- Ingeniously simple bit removal via integrated bit clamp
- With dimensions of just 75 x 53 x 15 mm, it fits in every shirt or trouser pocket
- Together with the Protector, can be attached to a belt

Wiha XLSelector.

Couldn't be smaller: for 25 mm bits.

ZOT Torsion and Security bits.

7948-047 **XLSelector Torsion, mixed, 31 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm ZOT Torsion and Standard bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: ClicFix quick release holder, magnetic.
Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!
Extra: Soft zones for maximum working comfort.

Order-No.	Series						
29415 1	7948-047						5
	7010 ZOT	1x5.5	1x6.5	1x8.0			
	7011 ZOT	2xPH1	5xPH2	2xPH3			
	7012 ZOT	2xPZ1	5xPZ2	2xPZ3			
	7013 Z	1x4.0	1x5.0	1x6.0			
	7015 ZOT	1xT10	1xT15	1xT20	1xT25	1xT30	1xT40
	7149	ClicFix quick release holder, magnetic, style E 6.3					

HOT Torsion and Standard bits.

7948-005 **XLSelector Standard, mixed, 31 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: Soft zones for maximum working comfort.

Order-No.	Series						
29417 5	7948-005						5
	7010 Z	1x4.5	1x5.5	1x6.5			
	7011 Z	2xPH1	4xPH2	1xPH3			
	7012 Z	2xPZ1	5xPZ2	1xPZ3			
	7015 Z	2xT10	2xT15	2xT20	3xT25	2xT30	1xT40
	7113 S	Universal holder, magnetic, style E 6.3					

7948-927 **XLSelector Standard, Security, 31 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm ZOT Torsion and Standard bits.
Holder: ClicFix quick release holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: Soft zones for maximum working comfort. Bits for popular security screws.

Order-No.	Series						
29416 8	7948-927						5
	7019 ZOT TW	1x0	1x1	1x2	1x3	1x4	
	7019 Z SP	1x4	1x6	1x8	1x10		
	7013 Z TR	1xTR2.0	1xTR2.5	1xTR3.0	1xTR4.0	1xTR5.0	
		1xTR6.0					
	7019 ZOT TS	1x6	1x8	1x10			
	7015 Z TR	1xT8H	1xT9H	1xT10H	1xT15H	1xT20H	
	7018 Z	1xT25H	1xT27H	1xT30H	1xT40H		
		1x1	1x2	1x3			
	7149	ClicFix quick release holder, magnetic, style E 6.3					

7948-255 **XLSelector Torsion/ Standard, mixed, 31 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm HOT Torsion and Standard bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in wood and soft materials – it can't get any more compact!
Extra: Soft zones for maximum working comfort. Extra hard Wiha HOT Torsion bits for optimum wear properties with soft screw applications, ideal for turning screws in wood.

Order-No.	Series						
29418 2	7948-255						5
	7012 HOT	3xPZ1	10xPZ2	2xPZ3			
	7015 Z	2xT10	2xT15	3xT20	4xT25	2xT30	2xT40
	7113 S	Universal holder, magnetic, style E 6.3					

Wiha XLSelector.

Couldn't be smaller: for 25 and 50 mm bits.

Inkra and Standard bits.

7948-92801 **XLSelector, Standard, mixed, 21 pcs.**

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 50 mm Inkra bits and 25 mm Standard bits.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: Soft zones for maximum working comfort.

Order-No.	Series						
33664 6	7948-92801					5	
	7011 Z	1xPH1	1xPH2	1xPH3			
	7012 Z	1xPZ1	1xPZ2	1xPZ3			
	7015 Z	1xT10	1xT15	2xT20	1xT25	1xT30	1xT40
	7041 Inkra	1xPH1	1xPH2	1xPH3			
	7042 Inkra	1xPZ1	1xPZ2	1xPZ3			
	7010 Z	1x6.5					
	7148C	CentroFix quick release holder, style E 6.3					

7948-0502 **XLSelector, Standard, TORX®, 21 pcs.**

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm and 50 mm Standard bits.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: Soft zones for maximum working comfort The TORX® ball end enables fastening and unfastening at an angle of up to 25°.

Order-No.	Series						
32803 0	7948-0502					5	
	7045BE	1xT10	1xT15	1xT20	1xT25	1xT30	1xT40
	7015TT	1xT15	1xT20	1xT25	1xT30		
	7015 Z TR	1xT15H	2xT20H	2xT25H	1xT30H		
	7016 Z	1x15IP	1x20IP	1x25IP	1x30IP		
	7148C	CentroFix quick release holder, style E 6.3					

ZOT Torsion and Standard bits.

7948-0501 **XLSelector, Standard, TORX® ball end, 13 pcs.**

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 50 mm TORX® ball end Standard bits.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: Soft zones for maximum working comfort.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.

Order-No.	Series						
32802 3	7948-0501					5	
	7045BE	1xT9	1xT10	2xT15	2xT20		
		2xT25	1xT27	2xT30	1xT40		
	7148C	CentroFix quick release holder, style E 6.3					

7948-928 **XLSelector, Torsion, mixed, 13 pcs.**

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 50 mm ZOT Torsion bits.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!
Extra: Soft zones for maximum working comfort.

Order-No.	Series						
33663 9	7948-928					5	
	7041 ZOT	1xPH1	1xPH2	1xPH3			
	7042 ZOT	1xPZ1	1xPZ2	1xPZ3			
	7045 Z	1xT10	1xT15	1xT20	1xT25		
		1xT30	1xT40				
	7148C	CentroFix quick release holder, style E 6.3					

Wiha XSelector.

Couldn't be smaller!

DuraBits with torsion zone.

7944-0DR7 **XSelector Dura, mixed, 11 pcs.**

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm DuraBits with torsion zone.
Extremely wear-resistant Dura tip with hard-metal coating grips into the screw head and prevents the bit from slipping.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Hard-metal coating, extremely wear-resistant.
Holder: ClicFix quick release holder, magnetic.
Application: Bits for fatigue-free, safe work in demanding industrial applications and for sensitive surfaces – it can't get any more compact!

Order-No.	Series						
26974 6	7944-0DR7					10	
	7010 DR	1x5.5	1x6.5				
	7011 DR	1xPH1	2xPH2	1xPH3			
	7012 DR	1xPZ1	2xPZ2	1xPZ3			
	7149	ClicFix quick release holder, magnetic, style E 6.3					

Diamond bits and TiN Torsion bits.

7944-0D7 **XSelector Diamond, mixed, 11 pcs.**

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Diamond Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Holder: ClicFix quick release holder, magnetic.
Application: Bits for fatigue-free work; bits ideal for frequent fastening – it can't get any more compact!

Order-No.	Series						
26976 0	7944-0D7					10	
	7010 D	1x5.5	1x6.5				
	7011 D	1xPH1	2xPH2	1xPH3			
	7012 D	1xPZ1	2xPZ2	1xPZ3			
	7149	ClicFix quick release holder, magnetic, style E 6.3					

7944-9DR7 **XSelector Dura, mixed, 11 pcs.**

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm DuraBits with torsion zone.
Extremely wear-resistant Dura tip with hard-metal coating grips into the screw head and prevents the bit from slipping.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Hard-metal coating, extremely wear-resistant.
Holder: ClicFix quick release holder, magnetic.
Application: Bits for fatigue-free, safe work in demanding industrial applications and for sensitive surfaces – it can't get any more compact!

Order-No.	Series						
26975 3	7944-9DR7					10	
	7012 DR	1xPZ1	2xPZ2	2xPZ3			
	7015 DR	1xT15	1xT20	1xT25	1xT30	1xT40	
	7149	ClicFix quick release holder, magnetic, style E 6.3					

SB7944-9DR7 **XSelector Dura, mixed, 11 pcs.**
Blister packed for hanging.

Order-No.	Series	
27001 8	SB7944-9DR7	10

7944-065 **XSelector TiN, mixed, 11 pcs.**

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm TiN Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: TiN coating, extends the tool life.
Holder: Universal holder, magnetic.
Application: Bits for trade and industry, especially with series connections – it can't get any more compact!

Order-No.	Series						
26977 7	7944-065					10	
	7010 TiN	1x5.5	1x6.5				
	7011 TiN	1xPH1	2xPH2	1xPH3			
	7012 TiN	1xPZ1	2xPZ2	1xPZ3			
	7113 S	Universal holder, magnetic, style E 6.3					

SB7944-065 **XSelector TiN, mixed, 11 pcs.**
Blister packed for hanging.

Order-No.	Series	
27003 2	SB7944-065	10

Wiha XSelector.

Couldn't be smaller!

ZOT Torsion bits.

7944-045 **XSelector Torsion, mixed, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm ZOT Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Order-No.	Series				
26978 4	7944-045				10
	7010 ZOT	1x5.5	1x6.5		
	7011 ZOT	1xPH1	2xPH2	1xPH3	
	7012 ZOT	1xPZ1	2xPZ2	1xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3			

SB7944-045 **XSelector Torsion, mixed, 11 pcs.**
Blister packed for hanging.

Order-No.	Series	
27004 9	SB7944-045	10

ZOT Torsion bits and HOT Torsion bits.

7944-245 **XSelector Torsion, Pozidriv, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm ZOT Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Order-No.	Series				
26980 7	7944-245				10
	7012 ZOT	2xPZ1	6xPZ2	2xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3			

SB7944-245 **XSelector Torsion, Pozidriv, 11 pcs.**
Blister packed for hanging.

Order-No.	Series	
27006 3	SB7944-245	10

Standard bits.

7944-005 **XSelector Standard, mixed, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series				
26982 1	7944-005				10
	7010 Z	1x5.5	1x6.5		
	7011 Z	1xPH1	2xPH2	1xPH3	
	7012 Z	1xPZ1	2xPZ2	1xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3			

SB7944-005 **XSelector Standard, mixed, 11 pcs.**
Blister packed for hanging.

Order-No.	Series	
27008 7	SB7944-005	10

Standard bits.

7944-505TR **XSelector Standard, TORX® H, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Standard bits. Suitable for TORX® Tamper Resistant security screws.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series					
26984 5	7944-505TR					10
	7015 Z TR	1xT7H	1xT8H	1xT9H	1xT10H	1xT15H
		1xT20H	1xT25H	1xT27H	1xT30H	1xT40H
	7113 S	Universal holder, magnetic, style E 6.3				

SB7944-505TR **XSelector Standard, TORX® H, 11 pcs.**
Blister packed for hanging.

Order-No.	Series	
27010 0	SB7944-505TR	10

7944-145 **XSelector Torsion, Phillips, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm ZOT Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Order-No.	Series				
26979 1	7944-145				10
	7011 ZOT	2xPH1	6xPH2	2xPH3	
	7113 S	Universal holder, magnetic, style E 6.3			

7944-055 **XSelector Torsion, mixed, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm HOT Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in wood and soft materials – it can't get any more compact!

Order-No.	Series				
29412 0	7944-055				10
	7010 HOT	1x5.5	1x6.5		
	7011 HOT	1xPH1	2xPH2	1xPH3	
	7012 HOT	1xPZ1	2xPZ2	1xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3			

7944-505 **XSelector Standard, TORX®, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series					
26983 8	7944-505					10
	7015 Z	1xT7	1xT8	1xT9	1xT10	1xT15
		1xT20	1xT25	1xT27	1xT30	1xT40
	7113 S	Universal holder, magnetic, style E 6.3				

SB7944-505 **XSelector Standard, TORX®, 11 pcs.**
Blister packed for hanging.

Order-No.	Series	
27009 4	SB7944-505	10

7944-904 **XSelector Standard, mixed, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series					
26985 2	7944-904					10
	7011 Z	1xPH1	1xPH2	1xPH3		
	7012 Z	1xPZ1	1xPZ2	1xPZ3		
	7015 Z	1xT15	1xT20	1xT25	1xT30	
	7113 S	Universal holder, magnetic, style E 6.3				

SB7944-904 **XSelector Standard, mixed, 11 pcs.**
Blister packed for hanging.

Order-No.	Series	
27011 7	SB7944-904	10

Stiftung Warentest
test
GUT (1,7)
Im Test: 17 Bit-Sets mit unterschiedlichen Bit-Sorten Phillips / Pozidriv
Ausgabe 2/2007

Wiha XSelector.

Couldn't be smaller!

Standard bits.

7944-905 **XSelector Standard, mixed, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series			
26986 9	7944-905			10
	7012 Z	1xPZ1	2xPZ2	2xPZ3
	7015 Z	1xT15	1xT20	1xT25
		1xT30	1xT40	
	7113 S	Universal holder, magnetic, style E 6.3		

SB7944-905 **XSelector Standard, mixed, 11 pcs. Blister packed for hanging.**

Order-No.	Series	
27012 4	SB7944-905	10

Standard bits.

7944-902 **XSelector Standard, hex, 9 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: With hex bits up to size 8 mm.

Order-No.	Series				
27157 2	7944-902				10
	7013 Z	1x1.5	1x2.0	1x2.5	1x3.0
		1x4.0	1x5.0	1x6.0	1x8.0
	7113 S	Universal holder, magnetic, style E 6.3			

7944-906 **XSelector Standard, mixed, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series			
26987 6	7944-906			10
	7011 Z	1xPH1	2xPH2	2xPH3
	7015 Z	1xT15	1xT20	1xT25
		1xT30	1xT40	
	7113 S	Universal holder, magnetic, style E 6.3		

SB7944-906 **XSelector Standard, mixed, 11 pcs. Blister packed for hanging.**

Order-No.	Series	
27013 1	SB7944-906	10

7944-995 **XSelector Standard, SIT, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm SIT bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: With bits to fit ASSY® and Pias screws.

Order-No.	Series			
27321 7	7944-995			10
	7019 Z SIT	2xSIT 10	3xSIT 20	2xSIT 25
		2xSIT 30	1xSIT 40	
	7113 S	Universal holder, magnetic, style E 6.3		

Wiha XSelector and XLSelector.

Couldn't be smaller!

Inkra bits.

TEST WINNING BITS
Stiftung Warentest
test
GUT (1,6)
Im Test: 17 Bit-Sets mit unterschiedlichen Bit-Sorten Phillips / Pozidriv
Ausgabe 2/2007

7944-0I5 **XSelector Inkra, mixed, 11 pcs.**

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.
Bits: 25 mm Inkra bits. Turning screws is easy, even if screwdriver is at an angle.
Holder: Universal holder, magnetic.
Application: The ideal bits for all hard-to-reach places, especially suitable for wood screws – it can't get any more compact!

Order-No.	Series			
26988 3	7944-0I5			10
	7011 Inkra	1xPH1	3xPH2	1xPH3
	7012 Inkra	1xPZ1	3xPZ2	1xPZ3
	7113 S	Universal holder, magnetic, style E 6.3		

SB7944-0I5 **XSelector Inkra, mixed, 11 pcs. Blister packed for hanging.**

Order-No.	Series	
27014 8	SB7944-0I5	10

7944 **Protector with System-Loop. Customised holder for the XSelector.**

Material: High quality, impact resistant plastic.
Application: For wall mounting or as a belt attachment when combined with the System Loop.

Order-No.	
27026 1	10

Sales counter display XSelector and XLSelector.

7948 VB1 **XLSelector Standard, display. 6 XLSelectors 7948-005.**

Order-No.						
29541 7	6 XLSelectors 7948-005					
	7010 Z	1x4.5	1x5.5	1x6.5		
	7011 Z	2xPH1	4xPH2	1xPH3		
	7012 Z	2xPZ1	5xPZ2	1xPZ3		
	7015 Z	2xT10	2xT15	2xT20	3xT25	2xT30	1xT40
	7113 S	Universal holder, magnetic, style E 6.3					

7944 VB5 **XSelector Standard, display. 12 XSelectors 7944-005.**

Order-No.				
27048 3	12 XSelectors 7944-005			
	7010 Z	1x5.5	1x6.5	
	7011 Z	1xPH1	2xPH2	1xPH3
	7012 Z	1xPZ1	2xPZ2	1xPZ3
	7113 S	Universal holder, magnetic, style E 6.3		

Wiha Collector.

Everything in one box.

A completely new look, and outstandingly equipped: the new Wiha Collector sets standards for convenient application of the bits.

The first impression convinces: the box is compact, solid and surprises with an innovative opening mechanism. The Collector opens up like a book with the easy-to-use button. The bits are clearly laid out, easy to remove and yet so firmly held that they cannot fall out if the box is accidentally knocked over. And talking of bits: the assortment is designed perfectly for all applications. Whether for special work in safety areas or for everyday tasks in trade and industry, the Wiha Collector is ready and waiting.

Versatile: for up to 60 bits as well as universal and quick release holders.

Innovative opening, and lots of space: the new Collector.

Wiha Collector.

- **Tough**
  Compact form, tough polycarbonate
- **Easy to open**
  With practical unlocking button – for when only one hand is free
- **Lots of space**
  30 premium bits with bit holder and hand-held screwdriver or 60 premium bits with bit holder
- **Diverse**
  Security bits or tried-and-true Standard bits for all applications
- **Optimal seating of bits**
  Easy to remove and yet still firmly held

Security-bits.

NEW

7928-928 **Bit Collector Security, mixed, 27 pcs.**

Housing: Robust box of high quality plastic with innovative opening mechanism.
Handle: Wiha SoftFinish® multi-component handle, magnetic, with 1/4" bit mount.
Bits: 25 mm Standard bits and Torsion bits, TORX® Tamper Resistant, Tri-Wing®, Torq-Set®, Spanner, hex Tamper Resistant.
Holder: Universal holder, magnetic.
Application: Bit cassette with bits for all popular security screws.

Order-No.	Series				
09393 8	7928-928				5
	7015 Z TR	1xT8H	1xT10H	1xT15H	1xT20H
		1xT25H	1xT27H	1xT30H	1xT40H
	7019 ZOT TS	1x6	1x8	1x10	
	7019 ZOT TW	1x1	2x2	1x3	1x4
	7019 Z SP	1x4	1x6	1x8	1x10
	7013 Z TR	1xTR5/64	1xTR3/32	1xTR7/64	1xTR1/8
		1xTR9/64	1xTR5/32		
	7113 S	Universal holder, magnetic, style E 6.3			
	281-02	Bit holder with handle, magnetic, 1/4"			

Standard bits.

NEW

7928-913 **Bit Collector Standard, mixed, 32 pcs.**

Housing: Robust box of high quality plastic with innovative opening mechanism.
Handle: Wiha SoftFinish® multi-component handle, magnetic, with 1/4" bit mount.
Bits: 25 mm Standard bits.
Holder: ClicFix quick release holder, magnetic.
Application: Can be used immediately for both machine and hand operation with handle and bit holder.

Order-No.	Series				
34686 7	7928-913				5
	7010 Z	1x4.5	1x5.5	1x6.5	
	7011 Z	2xPH1	5xPH2	2xPH3	
	7012 Z	2xPZ1	5xPZ2	2xPZ3	
	7015 Z	1xT10	1xT15	1xT20	1xT25
		1xT30	1xT40		
	7013 Z	1x4.0	1x5.0	1x6.0	
	7149	ClicFix quick release holder, magnetic, style E 6.3			
	281-02	Bit holder with handle, magnetic, 1/4"			

NEW

7928-923 **Bit Collector Standard, mixed, 61 pcs.**

Housing: Robust box of high quality plastic with innovative opening mechanism.
Bits: 25 mm Standard bits.
Holder: ClicFix quick release holder, magnetic.
Application: The complete assortment for every professional.

Order-No.	Series				
07943 7	7928-923				5
	7010 Z	1x4.5	1x5.5	1x6.5	1x8.0
	7011 Z	7xPH1	13xPH2	3xPH3	
	7012 Z	7xPZ1	13xPZ2	3xPZ3	
	7015 Z	1xT10	1xT15	1xT20	1xT25
		1xT30	1xT40		
	7013 Z	1x3.0	1x4.0	1x5.0	1x6.0
	7149	ClicFix quick release holder, magnetic, style E 6.3			

Wiha bit cassette and bulk packs.

Bit cassette.

7979-01 **Standard bit case, mixed, 31 pcs.**

Housing: Practical, rugged plastic box.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.

Order-No.	Series							
26252 5	7979-01							6
	7010 Z	1x4.5	1x5.5	1x6.5				
	7011 Z	2xPH1	6xPH2	1xPH3				
	7012 Z	2xPZ1	6xPZ2	1xPZ3				
	7015 Z	1xT10	1xT15	1xT20	1xT25	1xT30	1xT40	
	7013 Z	1x4,0	1x5,0	1x6,0				
	7113 S	Universal holder, magnetic, style E 6.3						

7979-02 **Standard bit case, mixed, 31 pcs.**

Housing: Practical, rugged plastic box.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.

Order-No.	Series						
26253 3	7979-02						6
	7012 Z	5xPZ1	10xPZ2	3xPZ3			
	7015 Z	2xT10	2xT15	2xT20	2xT25	2xT30	2xT40
	7113 S	Universal holder, magnetic, style E 6.3					

Bit bulk pack TiN.

7929 TiN **Bit bulk pack TiN, 25 mm, 50 pcs.**

Packaging: Practical cardboard box.
Can be used as a dispenser in the workplace.
Bits: 25 mm TiN Torsion bits.
Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Titanium nitride for extended tool life.
Application: Especially for professional needs.

Order-No.	Content	Quantity	
08053 2	7011 TiN	50	PH1 x 25
08054 9	7011 TiN	50	PH2 x 25
08055 6	7011 TiN	50	PH3 x 25
08062 4	7012 TiN	50	PZ1 x 25
08063 1	7012 TiN	50	PZ2 x 25
08064 8	7012 TiN	50	PZ3 x 25
33672 1	7015 TiN	50	T10 x 25
33673 8	7015 TiN	50	T15 x 25
33674 5	7015 TiN	50	T20 x 25
33675 2	7015 TiN	50	T25 x 25
33676 9	7015 TiN	50	T30 x 25

Bit bulk pack HOT.

7929 HOT **Bit bulk pack HOT, 25 mm, 50 pcs.**

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm HOT Torsion bits.
Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Application: Especially for professional needs.

Order-No.	Content	Quantity	
08050 1	7011 HOT	50	PH1 x 25
08051 8	7011 HOT	50	PH2 x 25
08052 5	7011 HOT	50	PH3 x 25
08059 4	7012 HOT	50	PZ1 x 25
08060 0	7012 HOT	50	PZ2 x 25
08061 7	7012 HOT	50	PZ3 x 25
33677 6	7015 HOT	50	T20 x 25
33678 3	7015 HOT	50	T25 x 25
33679 0	7015 HOT	50	T30 x 25

Bit bulk pack Inkra.

7929 Inkra **Bit bulk pack Inkra, 25 mm, 50 pcs.**

Packaging: Practical cardboard box.
Can be used as a dispenser in the workplace.
Bits: 25 mm Inkra bits.
Unmixed, available in the standard Phillips and Pozidriv sizes.
Geometry: The ideal bit for areas that are difficult to access,
particularly suitable for wood screws.
Coating: Non-corrosive coating.
Application: Especially for professional needs.

Order-No.	Content	Quantity	
31990 8	7011 Inkra	50	PH1 x 25
31991 5	7011 Inkra	50	PH2 x 25
31992 2	7011 Inkra	50	PH3 x 25
31993 9	7012 Inkra	50	PZ1 x 25
31994 6	7012 Inkra	50	PZ2 x 25
31995 3	7012 Inkra	50	PZ3 x 25

Bit bulk pack ZOT.

7929 ZOT **Bit bulk pack ZOT, 25 mm, 50 pcs.**

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm ZOT Torsion bits.
Unmixed, available in the standard Phillips and Pozidriv sizes.
Geometry: Patented torsion zone to prevent premature breaking of the bit
when under stress.
Application: Especially for professional needs.

Order-No.	Content	Quantity	
29875 3	7011 ZOT	50	PH1 x 25
29876 0	7011 ZOT	50	PH2 x 25
29877 7	7011 ZOT	50	PH3 x 25
29878 4	7012 ZOT	50	PZ1 x 25
29879 1	7012 ZOT	50	PZ2 x 25
29880 7	7012 ZOT	50	PZ3 x 25

Bit bulk pack Standard.

7929 Z **Bit bulk pack Standard, 25 mm, 50 pcs.**

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm Standard bits.
Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Application: Especially for professional needs.

Order-No.	Content	Quantity	
08047 1	7011 Z	50	PH1 x 25
08048 8	7011 Z	50	PH2 x 25
08049 5	7011 Z	50	PH3 x 25
08056 3	7012 Z	50	PZ1 x 25
08057 0	7012 Z	50	PZ2 x 25
08058 7	7012 Z	50	PZ3 x 25
08065 5	7015 Z	50	T10 x 25
08066 2	7015 Z	50	T15 x 25
08067 9	7015 Z	50	T20 x 25
08068 6	7015 Z	50	T25 x 25
29544 8	7015 Z	50	T27 x 25
08069 3	7015 Z	50	T30 x 25
08070 9	7015 Z	50	T40 x 25

Wiha SB bit programme.

Full programme range in outstanding quality.

You can display the bits effectively in the practical Wiha plastic boxes.

The bits are easily recognisable in the dust-repellent, transparent packaging. In addition, the labels provide all necessary information and at the same time ensure protection against theft. Contents, EAN code, article number and order number – everything can be seen at a glance with the large-format symbols.

A comprehensive range:
the Wiha SB bit range includes more than 100 different articles.

Wiha SB bit programme.

- Full-surface label with viewing window allows a view of box contents
- Large, clearly laid out presentation of quality, size and quantity
- Reusable plastic box
- Full assortment
- Slotted, Phillips, Pozidriv, hexagonal and TORX® outputs, various bit holders and tool shafts
- In qualities Dura, Diamond, TiN, HOT, ZOT, Inkra and Standard
- 1-pc, 2-pcs, 3-pcs, 6-pcs and 10-pcs

Style C 6.3 (1/4").

Wiha DuraBit
Wiha TiN Torsions bit
Wiha ZOT Torsions bit
Wiha Standard bit

701 **Slotted bits 25 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity				
Wiha DuraBit						
24713 3	7010 DR	**3**	4,5x25	5,5x25	6,5x25	
Wiha TiN Torsions bit						
08455 4	7010 TiN	**3**	4,5x25	5,5x25	6,5x25	
Wiha ZOT Torsions bit						
08454 7	7010 ZOT	**3**	4,5x25	5,5x25	6,5x25	
09496 6	7010 ZOT	**6**	5,5x25	6,5x25		
			PH1x25	PH2x25		
			PZ1x25	PZ2x25		
Wiha Standard bit						
07863 8	7010 Z	**2**	4,5x25	5,5x25		
07864 5	7010 Z	**2**	6,5x25	8,0x25		
08453 0	7010 Z	**3**	4,5x25	5,5x25	6,5x25	
09495 9	7010 Z	**6**	5,5x25	6,5x25		
			PH1x25	PH2x25		
			PZ1x25	PZ2x25		

Style C 6.3 (1/4").

Wiha DuraBit
Wiha Diamond bit
Wiha TiN Torsions bit
Wiha HOT Torsions bit
Wiha ZOT Torsions bit
Wiha Inkra bit
Wiha stainless steel bit
Wiha Standard bit

701 **Phillips bits 25 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity					
Wiha DuraBit							
33855 8	7011 DR	**2**	PH1x25				
24267 1	7011 DR	**2**	PH2x25				
33856 5	7011 DR	**2**	PH3x25				
24269 5	7011 DR	**3**	PH1x25	PH2x25	PH3x25		
Wiha Diamond bit							
22107 2	7011 D	**2**	PH1x25				
22109 6	7011 D	**2**	PH2x25				
22111 9	7011 D	**2**	PH3x25				
22113 3	7011 D	**3**	PH1x25	PH2x25	PH3x25		
Wiha TiN Torsions bit							
07821 8	7011 TiN	**2**	PH1x25				
07828 7	7011 TiN	**2**	PH2x25				
07846 1	7011 TiN	**2**	PH3x25				
07847 8	7011 TiN	**3**	PH1x25	PH2x25	PH3x25		
Wiha HOT Torsions bit							
20814 1	7011 HOT	**2**	PH2x25				
20818 9	7011 HOT	**3**	PH1x25	PH2x25	PH3x25		
Wiha ZOT Torsions bit							
07876 8	7011 ZOT	**2**	PH1x25				
07877 5	7011 ZOT	**2**	PH2x25				
07878 2	7011 ZOT	**2**	PH3x25				
07879 9	7011 ZOT	**3**	PH1x25	PH2x25	PH3x25		
24752 2	7011 ZOT	**10**	PH2x25				
Wiha Inkra bit							
22318 2	7011 Inkra	**2**	PH1x25				
22320 5	7011 Inkra	**2**	PH2x25				
22322 9	7011 Inkra	**2**	PH3x25				
22649 7	7011 Inkra	**3**	PH1x25	PH2x25	PH3x25		
Wiha stainless steel bit							
34483 2	7011ST	**2**	PH1x25				**NEW**
34484 9	7011ST	**2**	PH2x25				**NEW**
34485 6	7011ST	**2**	PH3x25				**NEW**
Wiha Standard bit							
07855 3	7011 Z	**3**	PH1x25				
07856 0	7011 Z	**3**	PH2x25				
07857 7	7011 Z	**3**	PH3x25				
07858 4	7011 Z	**3**	PH1x25	PH2x25	PH3x25		
24733 1	7011 Z	**10**	PH2x25				

Wiha SB bit programme.

Full programme range in outstanding quality.

Style C 6.3 (1/4").

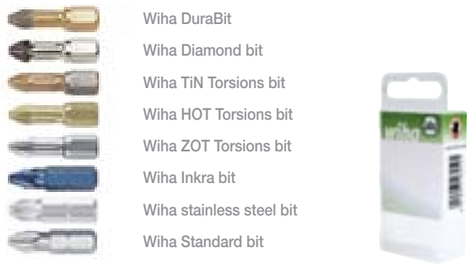

701 **Pozidriv bits 25 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity				
Wiha DuraBit						
33857 2	7012 DR	**2**	PZ1x25			
24271 8	7012 DR	**2**	PZ2x25			
33858 9	7012 DR	**2**	PZ3x25			
24273 2	7012 DR	**3**	PZ1x25	PZ2x25	PZ3x25	
Wiha Diamond bit						
22115 7	7012 D	**2**	PZ1x25			
22117 1	7012 D	**2**	PZ2x25			
22119 5	7012 D	**2**	PZ3x25			
22121 8	7012 D	**3**	PZ1x25	PZ2x25	PZ3x25	
Wiha TiN Torsions bit						
07848 5	7012 TiN	**2**	PZ1x25			
07849 2	7012 TiN	**2**	PZ2x25			
07850 8	7012 TiN	**2**	PZ3x25			
07851 5	7012 TiN	**3**	PZ1x25	PZ2x25	PZ3x25	
Wiha HOT Torsions bit						
20820 2	7012 HOT	**2**	PZ1x25			
20822 6	7012 HOT	**2**	PZ2x25			
20824 0	7012 HOT	**2**	PZ3x25			
20827 1	7012 HOT	**3**	PZ1x25	PZ2x25	PZ3x25	
Wiha ZOT Torsions bit						
07880 5	7012 ZOT	**2**	PZ1x25			
07881 2	7012 ZOT	**2**	PZ2x25			
07882 9	7012 ZOT	**2**	PZ3x25			
07883 6	7012 ZOT	**3**	PZ1x25	PZ2x25	PZ3x25	
Wiha Inkra bit						
22324 3	7012 Inkra	**2**	PZ1x25			
22326 7	7012 Inkra	**2**	PZ2x25			
22328 1	7012 Inkra	**2**	PZ3x25			
22647 3	7012 Inkra	**3**	PZ1x25	PZ2x25	PZ3x25	
Wiha stainless steel bit						
34486 3	7012ST	**2**	PZ1x25			**N E W**
34487 0	7012ST	**2**	PZ2x25			**N E W**
34488 7	7012ST	**2**	PZ3x25			**N E W**
Wiha Standard bit						
07859 1	7012 Z	**3**	PZ1x25			
07860 7	7012 Z	**3**	PZ2x25			
07861 4	7012 Z	**3**	PZ3x25			
20542 3	7012 Z	**1**	PZ4x32			
07862 1	7012 Z	**3**	PZ1x25	PZ2x25	PZ3x25	
24742 3	7012 Z	**10**	PZ2x25			

Style C 6.3 (1/4").

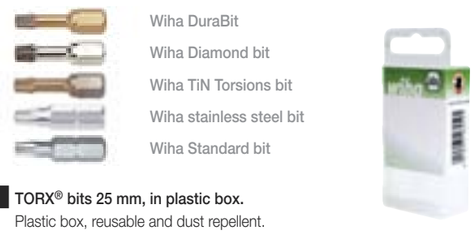

701 **TORX® bits 25 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity				
Wiha DuraBit						
33859 6	7015 DR	**1**	T10x25			
33860 2	7015 DR	**1**	T15x25			
33861 9	7015 DR	**1**	T20x25			
33862 6	7015 DR	**1**	T25x25			
33863 3	7015 DR	**1**	T30x25			
33864 0	7015 DR	**1**	T40x25			
Wiha Diamond bit						
22123 2	7015 D	**1**	T10x25			
22125 6	7015 D	**1**	T15x25			
22127 0	7015 D	**1**	T20x25			
22129 4	7015 D	**1**	T25x25			
22131 7	7015 D	**1**	T30x25			
22133 1	7015 D	**1**	T40x25			
Wiha TiN Torsions bit						
34747 5	7015 TiN	**2**	T10x25			**N E W**
34748 2	7015 TiN	**2**	T15x25			**N E W**
34749 9	7015 TiN	**2**	T20x25			**N E W**
34750 5	7015 TiN	**2**	T25x25			**N E W**
34751 2	7015 TiN	**2**	T30x25			**N E W**
34752 9	7015 TiN	**2**	T40x25			**N E W**
Wiha stainless steel bit						
34489 4	7015ST	**2**	T10x25			**N E W**
34490 0	7015ST	**2**	T15x25			**N E W**
34491 7	7015ST	**2**	T20x25			**N E W**
34492 4	7015ST	**2**	T25x25			**N E W**
34493 1	7015ST	**2**	T30x25			**N E W**
34494 8	7015ST	**2**	T40x25			**N E W**
Wiha Standard bit						
22640 4	7015 Z	**2**	T7x25	T8x25		
22641 1	7015 Z	**2**	T9x25	T10x25		
22643 5	7015 Z	**2**	T15x25	T20x25		
22645 9	7015 Z	**2**	T25x25	T27x25		
08421 9	7015 Z	**2**	T10x25			
08422 6	7015 Z	**2**	T15x25			
08423 3	7015 Z	**2**	T20x25			
08424 0	7015 Z	**2**	T25x25			
26451 2	7015 Z	**2**	T27x25			
08425 7	7015 Z	**2**	T30x25			
08426 4	7015 Z	**2**	T40x25			
07870 6	7015 Z	**3**	T7x25	T8x25	T9x25	
07871 3	7015 Z	**3**	T10x25	T15x25	T20x25	
31913 7	7015 Z	**3**	T15x25	T20x25	T25x25	
07872 0	7015 Z	**3**	T25x25	T30x25	T40x25	
07873 7	7015 Z	**6**	T10x25	T15x25	T20x25	
			T25x25	T30x25	T40x25	
34746 8	7015 Z	**10**	T15x25			**N E W**
24746 1	7015 Z	**10**	T20x25			
24748 5	7015 Z	**10**	T25x25			
24750 8	7015 Z	**10**	T30x25			

Style C 6.3 (1/4").

Wiha Standard bit

701 **Hex bits 25 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity			
25681 4	7013 Z	**2**	4,0x25		
25679 1	7013 Z	**2**	5,0x25		
07865 2	7013 Z	**3**	2,0x25	2,5x25	3,0x25
07866 9	7013 Z	**3**	4,0x25	5,0x25	6,0x25

Wiha Standard bit

701 **Hexagon ball end bits 38 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity			
22651 0	7017 Z	**3**	2,0x38	2,5x38	3,0x38
22653 4	7017 Z	**3**	3,0x38	4,0x38	5,0x38
22655 8	7017 Z	**3**	4,0x38	5,0x38	6,0x38

Style E 6.3 (1/4").

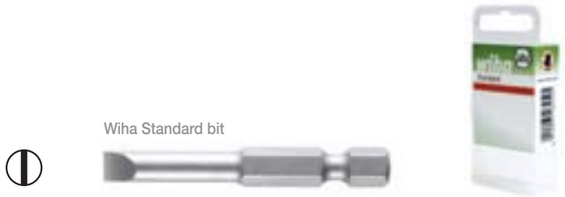

Wiha Standard bit

704 **Slotted bits 50 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity			
08419 6	7040 Z	**3**	3,0x50	3,5x50	4,0x50
08420 2	7040 Z	**3**	5,5x50	6,5x50	8,0x50

Wiha DuraBit

Wiha ZOT Torsions bit

704 **Phillips bits 50 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity			
24727 0	7041 DR	**2**	PH2x50		
07887 4	7041 ZOT	**3**	PH1x50	PH2x50	PH3x50

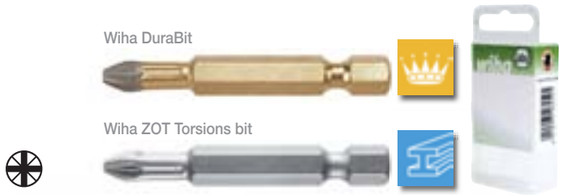

Wiha DuraBit

Wiha ZOT Torsions bit

704 **Pozidriv bits 50 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity			
24738 6	7042 DR	**2**	PZ2x50		
07888 1	7042 ZOT	**3**	PZ1x50	PZ2x50	PZ3x50

Wiha SB bit programme.

Full programme range in outstanding quality.

Style E 6.3 (1/4").

Wiha Standard bit

7045 **TORX® bits 50 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity			
07874 4	7045 Z	**3**	T10x50	T15x50	T20x50
07875 1	7045 Z	**3**	T25x50	T30x50	T40x50

Wiha Standard bit

7045B **TORX® ball end bits 50 mm, in plastic box.**
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.	Content	Quantity	
32805 4	7045BE	**1**	T20x50
32808 5	7045BE	**1**	T20x70
32810 8	7045BE	**1**	T20x90
32806 1	7045BE	**1**	T25x50
32809 2	7045BE	**1**	T25x70
33252 5	7045BE	**1**	T25x90
32811 5	7045BE	**1**	T30x90
32807 8	7045BE	**3**	T20x50 T25x50 T30x50

Quick release holder.

NEW

7148CM **CentroFix quick release holder, magnetic, style E 6.3.**
Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold.
Optimised for the use of drill bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive.
The play between bit and holder is reduced to a minimum.
Real single-handed operation for fast bit exchange.

Order-No.				
35386 5	**1/4**	**1/4**	60	1

714 **ClicFix quick release holder, magnetic, style E 6.3.**
Sleeve: Aluminium anodized.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: For applications where the bit must be held tight e.g. assembly lines.
Extra: Real single-handed operation for fast bit exchange.

Order-No.				
24778 2	**1/4**	**1/4**	60	1

Universal holder.

7113 **Universal holder, magnetic, style E 6.3.**
Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.				
07869 0	**1/4**	**1/4**	58	1

Tool shaft.

7240 **Tool shaft, style E 6.3.**
Standards: Adapter DIN 7428.
Suitable for: DIN 3121, ISO 1174, style F 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For machine used nut driver sockets.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.				
08427 1	**1/4**	**1/4**	50	1

Wiha pliers.

Quality and ergonomics for professionals.

Pliers range

Quality features of good pliers. ..... 174 – 175

Wiha pliers matrix.
Discover real pliers quality. ..... 176 – 177

Wiha Inomic®.
Pliers reinvented. ..... 178 – 179

Wiha Professional.
Quality down to the last detail. ..... 180 – 184

Wiha Industrial.
Comfortable in your hand, versatile in application. ..... 185 – 188

Wiha Basic.
The complete workshop range. ..... 189 – 199

Wiha Electronic.
Precision for made-to-measure work. ..... 200 – 203

Note:
The new Wiha pliers design shown in the catalogue is available from May 2010.

Wiha VDE pliers.
See VDE tool range, page 244 – 249

Wiha ESD pliers.
See ESD tool range, page 282 – 285

Wiha ESD tweezers.
See ESD tool range, page 286 – 289

Wiha pliers.

▶ *See VDE tools, page 244 – 245*

▶ *See VDE tools, page 246 – 249*

▶ *See ESD tools, page 282 – 285*

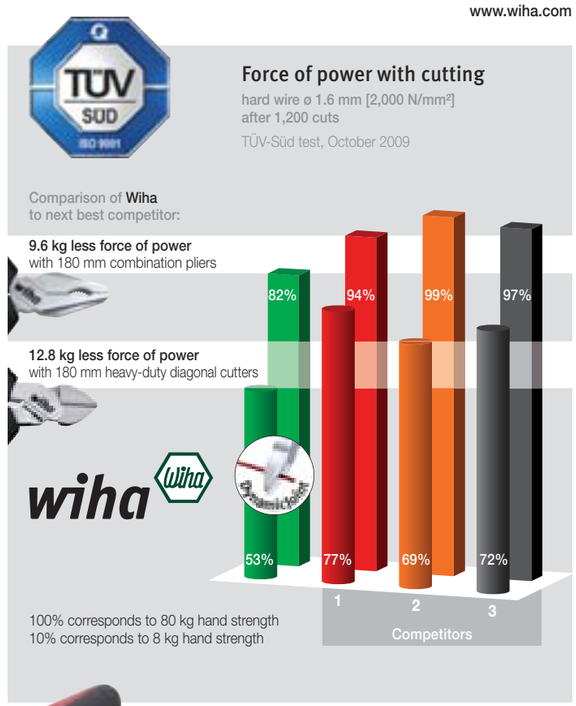

product design award 2007

reddot design award winner 2007

Quality in all aspects from stripping to gripping

Maximum quality for all products – in this way Wiha meets the high demands of the user. This also holds true for the pliers assortment.

First class material, tried-and-true processes

Selected, premium grade steel, pleasant plastic application on the handle and a manufacturing process for all aspects according to state-of-the-art quality management directives – this forms the basis for the tried-and-trusted Wiha quality. A special heat treatment and inductive hardening of highly stressed parts ensure a long service life.

Even more precise? Yes!

"Functionality": this somewhat sober yet important phrase represents a host of clever ideas. As such Wiha pays attention to a precise interplay of joints and an exact processing of cutting edges and gripping surfaces.

Focus Energy Silber 2006

Ergonomics: "grippy" in the best sense of the word!

Wiha pliers are consistently designed according to the requirements of users. Proof of this is the innovative and angled form of the Wiha Inomic® pliers series. And the multi-component pliers handles have also been designed according to the latest findings from the field of ergonomics. With extra wide handle backs and a well thought-out distribution of soft and hard zones they are both comfortable and easy on the hands.

Not only new, but innovative as well

Current examples in the further development of the Wiha pliers series clearly demonstrate what the power of innovation can achieve for users:

– Wiha has perfected the interplay of technology and natural movement with the Inomic® pliers generation.
– More "bite", meaning greater cutting performance with less expenditure of effort: that's what **Wiha DynamicJoint** represents. The optimised joint construction reduces the force needed for cutting by up to 40 % !
– **MagicTips,** the precision tips made from high performance steel create an added plus in terms of stability and safety with the Basic series circlip pliers. The special latching function that prevents a jumping away of the safety rings is as unique as it is useful!

Because that is and has always been the aim of Wiha innovations making work with pliers safer, more energy-saving and with greater comfort. For absolutely professional results.

Wiha quality management

The Wiha quality assurance system in accordance with ISO 9001:2008 ensures with pliers as well that only first-class products leave our factory. Continuously monitored production processes and documented organisational procedures form the basis for the excellent quality for which Wiha products are renowned.

product design award 2007

reddot design award winner 2007

*For ergonomic and qualitative design, the **Wiha Inomic® pliers** were awarded not only the "iF – product design award" but the "red dot design award" as well. In addition to the red dot award, organised as part of the world's largest show for contemporary design, the iF product design award is one of the oldest and most renowned design accolades.*

Inomic® distinctions:
The levels of innovation, functionality, ergonomics and service life speak for themselves.

Focus Energy Silber 2006

***Wiha Professional pliers** have won the "Focus in Silver" award for outstanding design. The Stuttgart Design Center awarded the 2006 international design prize in a special energy category. Energy also determines the reference level – the key to success.*

"Focus in Silver" award:
Convincing ergonomics, surface feel and clean design lines.

Wiha pliers matrix.

Discover real pliers quality.

	Wiha Inomic®		Wiha Inomic® VDE		Wiha Professional		Wiha Professional electric		Wiha Industrial		Wiha Basic	
	Typ		Typ		Typ		Typ		Typ		Typ	
Combination pliers	180	179	180	245	160	181	160	247	160	186	160	190
					180	181	180	247	180	186	180	190
					200	181	200	247	200	186	200	190
High leverage combination pliers					200	181	200	247	200	186	200	190
					225	181			225	186	225	190
Needle nose pliers	160	179	160	245	160	182	160	247	160	187	160	190
					200	182	200	247	200	187	200	190
Needle nose pliers, angled					160	182	160	247	160	187	160	190
					200	182	200	247	200	187	200	190
Long-flat nose pliers					160	181	160	247	160	186	160	190
Long-round nose pliers					160	181	160	248	160	186	160	191
Diagonal cutters	160	179	160	245	140	182	140	248	140	187	140	191
					160	182	160	248	160	187	160	191
					180	182	180	248	180	187	180	191
Heavy duty diagonal cutters					160	182	160	248	160	187	160	191
					180	182	180	248	180	187	180	191
					200	182	200	248	200	187	200	191
Electrician's diagonal cutters							160	248				
Cable cutters							160	248			160	191
							200	248			200	191
Stripping pliers					160	181	160	247	160	188	160	191
Crimping pliers for end sleeves											145	191
											180	191
Revolving punch and loop pliers					225	183						
Revolving punch pliers					225	183						
Water pump pliers					250	183			250	188	180	192
											250	192
											300	192
Water pump pliers					250	183			250	188	180	192
with push button setting											250	192
											300	192
QuickFix water pump pliers					250	183					250	192
End cutting nippers											160	193
											180	193
											200	193
Pincers (carpenter's pincers)											180	193
											200	193
Concretors pincers											200	193
with handle coating											250	193
											280	193
											300	193
Concretors pincers											200	193
											250	193
											280	193
											300	193
Pipe wrenches swedish style, S-jaw											320	196
											420	196
											535	196
Pipe wrenches swedish style, 45°											315	196
											420	196
											570	196
Pipe wrenches swedish style, 90°											320	196
											415	196
											555	196
Grip pliers with wire cutter											180	197
											250	197
											300	197
Welding grip pliers											280	197
Pipe welding grip pliers											280	197
Profile welding grip pliers											280	197
Cable shears											●	250
Crimp tools											●	250
											●	251
Automatic stripping pliers											●	251

	for boreholes			for shafts			for boreholes			for shafts		
	Typ			Typ			Typ			Typ		
Circlip pliers for bores	J 0	8 - 13	195	A 0	7 - 10	195	J 0	8 - 13	194	A 0	3 - 10	194
– Straight shape	J 1	12 - 25	195	A 1	10 - 25	195	J 1	12 - 25	194	A 1	10 - 25	194
	J 2 •	19 - 60	195	A 2 •	19 - 60	195	J 2	19 - 60	194	A 2	19 - 60	194
	J 3 •	40 -100	195	A 3 •	40 -100	195	J 3	40 -100	194	A 3	40 -100	194
	J 4 •	85 -140	195	A 4 •	85 -140	195	J 4	85 -140	194	A 4	85 -140	194
Circlip pliers for shafts	J 01	8 - 13	195	A 01	7 - 10	195	J 01	8 - 13	194	A 01	3 - 10	194
– Shape D: 90° angled shape	J 11	12 - 25	195	A 11	10 - 25	195	J 11	12 - 25	194	A 11	10 - 25	194
	J 21 •	19 - 60	195	A 21 •	19 - 60	195	J 21	19 - 60	194	A 21	19 - 60	194
	J 31 •	40 -100	195	A 31 •	40 -100	195	J 31	40 -100	194	A 31	40 -100	194
	J 41 •	85 -140	195	A 41 •	85 -140	195	J 41	85 -140	194	A 41	85 -140	194

• with safety latching function

	Wiha Professional ESD						Wiha Electronic					
				with wire trapping spring	Typ					with wire trapping spring	Typ	
Diagonal cutter	●				115	283	●				118	202
– Narrow, pointed head		●			115	283	●			●	120	202
			●		115	283						
Diagonal cutter	●				115	283	●				138	201
– Wide, pointed head		●		●	115	283	●			●	138	201
			●		115	283		●			138	201
Diagonal cutter												
– Narrow, semi-circular head		●			115	284						
Diagonal cutter		●			115	284						
– Wide, semi-circular head			●		115	284						
Oblique cutting nippers												
– Wide, pointed head							●				138	202
Oblique end cutting nippers												
– Narrow head							●				118	202
– Extra narrow head, cutting edges angled at 40°		●			110	284						
– Wide head, angled at 29°		●			110	284						
End cutting nippers												
– Extra narrow, slim shape		●			110	284						
– Wide head		●			115	285						
Needle nose pliers					120	285						
– Straight head					145	285						
Needle nose pliers												
– Angled					120	285						
Round nose pliers					120	285						
Flat nose pliers					120	285						
Pointed pliers											135	203
Stripping pliers												
– 20 18 16 14 12 10 AWG, ø 0.81 - 2.59 mm											180	203
– 26 24 22 20 18 16 AWG, ø 0.4 - 1.3 mm											180	203

Wiha Inomic®.

Pliers – reinvented.

▶ See VDE tools, page 244 – 245

Locking mechanism: Pliers should be transported and stored in closed position

Head of pliers made of high quality tool steel, cutting edges additionally induction hardened

Metal parts with all-round, corrosion resistant surface

Handle with ergonomic soft-grip zone made of thermoplastic elastomer (TPE) in the pressure area around the ball of the thumb

The areas in the arm of the pliers that move and press against each other feature hard plastic: low abrasion

Impact-resistant tool body made of fibre-glass reinforced plastic: Low weight

product design award 2007

reddot design award winner 2007

Innovative technology and as ergonomic as nature: descriptions that fit Wiha Inomic® pliers perfectly.

Firstly as an extension of the hand: firm and secure when gripping, and with a natural movement that is easy on the joints. And then progressive know-how: with high quality materials that feel soft but are relentless with components being worked upon.

Pliers have been around for ages. But never with so many ideas and intelligent details as the Wiha Inomic® pliers.

The relaxed hold when using Inomic® ensures fatigue-free work.

Fraunhofer Institut Arbeitswirtschaft und Organisation

In collaboration with the IAO Stuttgart (Institute for Industrial Engineering), a wide variety of shapes and variants for this new generation of pliers was investigated during the course of extensive studies and user tests. Gripping system, hand closure forces, jaw shapes and geometries are just a few of the points examined.

Wiha Inomic®.

- **Gentle**
  The angled form is easy on muscles, tendons and joints
- **Powerful**
  All fingers grip at the same time.
- **Robust and durable**
  Strong pliers jaws, complete zinc-nickel coating, impact resistant construction
- **Sensitive**
  Greater control with grasping via opening spring with fine resistance
- **Ergonomic**
  Like the extension of a hand: grasping is simple, firm and safe
- **Attractive**
  An appealing design

Combination pliers.

Z 01 0 15 **Combination pliers Inomic®.**

Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws.
Cutting edges additionally induction hardened to approx. 64 HRC.
Arms of the pliers move in parallel: +25% force transfer.
Angled shape (23°) for fatigue-free work.
With opening spring and locking mechanism.
Material: Pliers head of high-quality tool steel.
Handles made of tough fibre-glass reinforced plastic, ergonomic soft grip zone in the handle.
Application: For gripping, holding and cutting.
With improved access to the objects to be processed.

Order-No.	Typ				
33260 0	180	3.3	2.2	155	5

Needle nose pliers and diagonal cutters.

Z 05 0 15 **Needle nose pliers Inomic®.**

Head shape: Straight form with extra-long cutting edge.
Design: Ridged gripping surfaces.
Cutting edges additionally induction hardened to approx. 64 HRC.
Arms of the pliers move in parallel: +25% force transfer.
Angled shape (23°) for fatigue-free work.
With opening spring and locking mechanism.
Material: Pliers head of high-quality tool steel.
Handles made of tough fibre-glass reinforced plastic, ergonomic soft grip zone in the handle.
Application: For gripping, holding and cutting.
With improved access to the objects to be processed.

Order-No.	Typ				
33256 3	160	2.5	1.6	150	5

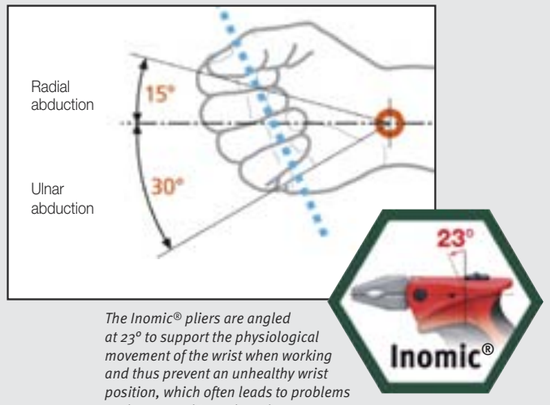

The Inomic® pliers are angled at 23° to support the physiological movement of the wrist when working and thus prevent an unhealthy wrist position, which often leads to problems such as carpal tunnel syndrome.

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	Soft wire	Copper, aluminium	220 - 250
○	Medium hard wire	Iron nail	750 - 800
○	Hard wire	Spring wire, steel nails	1.600 - 1.800
●	Piano wire	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Z 12 0 15 **Diagonal cutters Inomic®.**

Head shape: Semi-circular, swedish style.
Design: Arms of the pliers move in parallel: +25% force transfer.
Angled shape (23°) for fatigue-free work.
With opening spring and locking mechanism.
Material: Pliers head of high-quality tool steel.
Handles made of tough fibre-glass reinforced plastic, ergonomic soft grip zone in the handle.
Application: For soft and hard wires.
With improved access to the objects to be processed.

Order-No.	Typ				
33254 9	160	2.8	2.0	140	5

Wiha Professional.

Quality down to the last detail.

▶ See VDE tools, page 246 – 249

Focus Energy Silber 2006

Wiha received the "Focus in Silber" award for outstanding design.

Hard, comfortable elastomer zones ensure low friction in the movement range of the fingers

The stops on the ends of the arms prevent the hands from slipping

The robust, ergonomic handle is carefully fixed to the pliers

Valuable chrome plating for long lasting corrosion protection

Extra broad arms made of soft, non-slip elastomer are gentle on the parts of the hand that are sensitive to pressure

Harmonious design of the front part of the handle for an optimum finger hold when applying force

Functionality, quality and comfort: only three of the many features that professionals fundamentally demand of their tools.
Wiha Professional implements these in a consistent manner.

With a new dimension in terms of functionality: DynamicJoint, the progressive development of the joint construction, ensures precise cuts with simultaneously up to 40% less force of power. Cutting performance is still as high even after thousands of applications!

And in addition Wiha Professional pliers are characterised by manufacture from selected, multi-hardened steel with quality chrome plating. The elastic, shock absorbing plastic handles guarantee comfortable, fatigue-free work.

Wiha Professional carries on where average tools give up the ghost. For thoroughly professional results every time.



Wiha's professional combination pliers offer a secure hold when gripping, bending and cutting both soft and hard wires.
The extra wide arms of the new, ergonomic, multi-component handle sleeves offer maximum comfort, even when applying larger amounts of force.

The low expenditure of energy thanks to DynamicJoint is especially advantageous when cutting a large number of hard objects.

Wiha Professional.

- **Powerful**
  With DynamicJoint, the high quality joint construction for simple, long-term cutting efficiency
- **As hard as steel**
  Pliers head drop forged from high quality steels
- **Robust and durable**
  Cutting edges are individually tempered and additionally induction hardened to approx. 64 HRC; joints are extremely wear resistant and withstand high stresses, with high-quality riveting
- **Ergonomic**
  Extra wide handle backs, with soft and hard zones perfectly distributed across the handle
- **Attractive**
  Award-winning design with high quality chrome-plated head

Combination and high leverage combination pliers.

NEW

Z 01 0 05 **Combination pliers Professional.**

Standards: DIN ISO 5746.
Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws.
Cutting edges additionally induction hardened to approx. 62 HRC.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, tempered.
Application: General purpose pliers for gripping and holding as well as cutting soft and hard wires and cables.

Order-No.	mm	"				
26704 9	**160**	**6 ½**	3.0	2.0	195	5
26707 0	**180**	**7**	3.4	2.2	245	5
26710 0	**200**	**8**	3.6	2.5	325	5

NEW

Z 02 0 05 **High leverage combination pliers Professional.**

Standards: DIN ISO 5746.
Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws.
Particularly powerful leverage results in 40% less effort being required for cutting tasks compared with standard combination pliers.
Cutting edges additionally inductively hardened to approx. 64 HRC, therefore also appropriate for cutting piano wire.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, specially tempered.
Application: Power assisted general purpose pliers for gripping and holding as well as cutting wires and cables ranging in hardness from soft to extremely hard.

Order-No.	mm	"					
26713 1	**200**	**8**	3.8	2.8	2.3	315	5
26716 2	**225**	**9**	4.4	3.0	2.5	370	5

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	**Soft wire**	Copper, aluminium	220 - 250
○	**Medium hard wire**	Iron nail	750 - 800
○	**Hard wire**	Spring wire, steel nails	1.600 - 1.800
●	**Piano wire**	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Stripping, long-flat and round nose pliers.

Z 55 0 05 **Stripping pliers Professional.**

Standards: DIN ISO 5743.
Head shape: Precision cutting edge prism for even cutting of cable insulation.
Design: An easy to use adjusting screw allows the stripping diameter to be set.
Opening spring for effortless and sensitive handling of pliers.
Material: High-quality tool steel, tempered.
Application: Simple stripping of cables and strands of up to ø 5 mm = 10 mm² conductor cross-section.

Order-No.	mm	"		
26846 6	**160**	**6 ½**	155	5

Z 07 0 05 **Long-flat nose pliers Professional.**

Standards: DIN ISO 5745.
Head shape: Extra long head.
Design: Ridged gripping surfaces.
Material: High-quality tool steel, tempered.
Application: Gripping and right-angled bending of wires and sheet metal parts.

Order-No.	mm	"		
26731 5	**160**	**6 ½**	160	5

Z 09 0 05 **Long-round nose pliers Professional.**

Standards: DIN ISO 5745.
Head shape: Extra long head.
Design: Ridged gripping surfaces.
Material: High-quality tool steel, tempered.
Application: Gripping and bending of wires and sheet metal parts.

Order-No.	mm	"		
26734 6	**160**	**6 ½**	140	5

Wiha Professional.

Quality down to the last detail.

▶ *See VDE tools, page 246 – 249*

Needle nose pliers with cutting edge (snipe nose pliers).

Z 05 0 05 **Needle nose pliers Professional with cutting edge.**

Standards: DIN ISO 5745.
Head shape: Straight shape.
Design: Extra long cutting edge for flat and round cables.
Gripping surfaces serrated in parts.
Cutting edges additionally induction hardened to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Gripping and holding as well as cutting soft and hard wires and cables.
Preferred choice in the mechanical sector.

Order-No.	mm	"				
26719 3	**160**	**6 ½**	2.5	1.8	155	5
26722 3	**200**	**8**	2.8	2.0	200	5

Z 05 1 05 **Needle nose pliers Professional with cutting edge.**

Standards: DIN ISO 5745.
Head shape: Angled, approx. 40°.
Design: Extra long cutting edge for flat and round cables.
Gripping surfaces serrated in parts.
Cutting edges additionally induction hardened to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Gripping and holding as well as cutting soft and hard wires and cables.
Preferred choice in the mechanical sector.

Order-No.	mm	"				
26724 7	**160**	**6 ½**	2.5	1.8	155	5
26726 1	**200**	**8**	2.8	2.0	200	5

Diagonal cutters and heavy duty diagonal cutters.

NEW

Z 12 0 05 **Diagonal cutters Professional.**

Standards: DIN ISO 5749.
Head shape: Semi-circular, swedish style.
Design: Low wear lap joint, riveted and able to withstand high loads.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Lightweight action, clean cutting achieved by specially milled precision cutting edges. Durable cutting edges due to additional induction hardening to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: For soft and hard wires.

Order-No.	mm	"					
26736 0	**140**	**5 ½**	4.0	2.5	1.8	160	5
26740 7	**160**	**6 ½**	4.0	2.8	2.0	200	5
26743 8	**180**	**7**	4.0	3.0	2.5	250	5

NEW

Z 16 0 05 **Heavy duty diagonal cutters Professional.**

Standards: DIN ISO 5749.
Head shape: Semi-circular.
Design: Low wear lap joint, riveted and able to withstand high levels of load.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges. Lightweight action, clean cutting achieved by specially milled precision cutting edges. Long term cutting is achieved through additional inductive hardening to approx. 64 HRC.
Material: High-quality tool steel, specially tempered.
Application: Power assisted, all round diagonal cutter for soft wire as well as the most stringent of demands made by piano wires.

Order-No.	mm	"					
26747 6	**160**	**6 ½**	3.5	2.5	2.0	190	5
26750 6	**180**	**7**	3.8	2.7	2.3	260	5
26753 7	**200**	**8**	4.2	3.0	2.5	315	5

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	**Soft wire**	Copper, aluminium	220 - 250
○	**Medium hard wire**	Iron nail	750 - 800
○	**Hard wire**	Spring wire, steel nails	1.600 - 1.800
●	**Piano wire**	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Wiha Info

NEW

Wiha DynamicJoint – Top of their class

- **Innovative:** Unique joint construction, patent applied for
- **Effective:** Low loss of force means **less force needed for cutting** – up to 40%
- **Permanent:** Optimal performance even after thousands of cuts



*Up to **40% less force** for cutting*

Water pump pliers.

Z 21 0 05 **Water pump pliers Professional, box type.**

Standards: DIN ISO 8976.
Head shape: Narrow head, therefore also appropriate for work in small spaces.
Design: Precision adjustment joint, box type, providing optimum adaptation to object to be gripped.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome vanadium tool steel, tempered.
Application: For gripping and holding pipes and angular profiles such as hex nuts in the installation area.

Order-No.	mm	"				
26762 9	**250**	**10**	2	50	380	5

Z 22 0 05 **Water pump pliers Professional with push button setting.**

Standards: DIN ISO 8976.
Head shape: Extra narrow head, therefore also appropriate for work in difficult to access areas.
Design: Precision adjustment joint, box type, providing optimum adaptation to object to be gripped.
Rapid and simple push button setting and locking.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome vanadium tool steel, tempered.
Application: For gripping and holding pipes and angular profiles such as hex nuts in the installation area.

Order-No.	mm	"				
26766 7	**250**	**10**	2	50	400	5

Z 23 0 05 **QuickFix water pump pliers Professional, box type.**

Standards: DIN ISO 8976.
Head shape: Narrow head, therefore also appropriate for work in small spaces.
Design: Fast and easy-to-adjust water pump pliers, with automatic adjustment of the box type, precision-stepped joint.
Optimum adjustment to the object to be gripped.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome vanadium tool steel, tempered.
Application: For rapid and optimum gripping and holding of pipes and angular profiles such as hex nuts in the installation area.

Order-No.	mm	"				
26769 8	**250**	**10**	1 ½	40	380	5

Revolving punch pliers.





Z 65 2 05 **Professional revolving punch and loop pliers.**

Head shape: Alternate equipping of perforating tubes and loop punches.
Design: Locking lever and rotatable magazine with hole sizes 4.0 / 4.5 and 5.0 mm and corresponding loop punches.
Ergonomic plastic handle.
Material: Body of pliers made of high-resistance special steel, nickel-plated.
Application: For perforating and pressing of loops in three sizes with only one tool.

Order-No.	mm	"	Ø		
29550 9	**225**	**9**	4.0-5.0	325	5

Z 65 0 05 **Professional revolving punch pliers.**

Head shape: Size designation of perforating tubes in viewing window.
Design: Locking mechanism and 6 exchangeable punching tools, diameter: 2.0 / 2.5 / 3.0 / 3.5 / 4.0 / 4.5 mm.
With opening spring and locking mechanism for real single-handed operation.
Material: Body of pliers made of high-resistance special steel, nickel-plated.
Application: Perforation of a wide variety of different materials in trade, industry and DIY.

Order-No.	mm	"	Ø		
28402 2	**225**	**9**	2.0-4.5	325	5

Opening width of water pump pliers.

Maximum gripper width across flats [mm]
Maximum gripper pipe diameter ["]

Wiha Professional.

Quality down to the last detail.

▶ *See VDE tools, page 246 – 249*

Pliers set and tool bag.

Z 99 0 002 05 **Pliers set Professional Plus, 3 pcs.**

Design: All pliers made of high quality tool steel, hardened, polished and chrome-plated. Multi-component handles with slip guard for safe and comfortable operation. Cutting pliers are also suited for extremely hard wires. QuickFix water pump pliers with "automatic" rapid adjustment. Weight 1120 g.

Content: **High leverage combination pliers,** series Z 02 0 05, 200 mm – with Wiha DynamicJoint
High leverage diagonal cutters, series Z 16 0 05, 180 mm – with Wiha DynamicJoint
QuickFix water pump pliers series Z 23 0 05, 250 mm

Application: Power assisted pliers for providing craftsmen or industrial mechanics with a basic set of pliers.

Order-No.	Series	
26854 1	Z 99 0 002 05	1

9300-001 **Mechanic's tool bag, 11 pcs.**

Design: High-quality tools in practical tool bag with carrying handle. Bag format approx. 33 x 27 x 5.5 cm. Weight 2170 g.

Content: **Wiha SoftFinish® screwdriver:**
– slotted screwdriver, series 302: 3x100 / 5,5x125
– Phillips screwdriver, series 311: PH1x80 / PH2x100
Bit holder with SoftFinish® handle, series 386 (1/4")
XSelector 7944-904 (PH / PZ / TORX®)
PocketStar 351 PG7 (hex assortment)
QuickFix water pump pliers series Z 23 0 05, 250 mm
Combination pliers series Z 01 0 05, 180 mm
Plastic folding metre rule 1 m 41010002
Plastic folding metre rule 2 m 41020002

Application: Selected stock for most common applications.

Order-No.	Series	
28142 7	9300-001	1

Tool set.

Z 99 0 003 05 **Tool set Professional Mix, 5 pcs.**

Design: Pliers made of high quality tool steel, hardened, polished and chrome plated. Multi-component handles with slip guard for safe and comfortable operation. Wiha SoftFinish® screwdriver with round blade and ChromTop® blade tip. Weight 720 g.

Content: **Diagonal cutters,** series Z 12 0 05, 160 mm – with Wiha DynamicJoint
Needle nose pliers series Z 05 0 05, 200 mm
Wiha SoftFinish® screwdriver:
– slotted screwdriver, series 302: 3.5x100 / 5.5x125
– Phillips screwdriver, series 311: PH2x100

Application: The compact basic set of pliers and screwdrivers for demanding craftsmen and industrial mechanics.

Order-No.	Series	
26856 5	Z 99 0 003 05	1

Symbols.

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	Soft wire	Copper, aluminium	220 - 250
○	Medium hard wire	Iron nail	750 - 800
○	Hard wire	Spring wire, steel nail	1.600 - 1.800
●	Piano wire	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Dimensions.

- Maximum gripper width across flats
- Maximum gripper pipe diameter
- Opening width, flat
- Clamping range
- Retaining ring, external
- Retaining ring, internal

Jaw style:	Cutter style:
Flat jaws	Cutter without bevel
Half round jaws	Cutter with small bevel
Round jaws	Cutter with bevel
	Center cutter
	Scissors cutter
	Anvil cutter
	Stripper

Wiha Industrial.

Comfortable in your hand, versatile in application.

Focus Energy Silber 2006

Wiha received the "Focus in Silber" award for outstanding design.

The interior is made of harder material for less friction

Multi-polished plier heads

The exterior of the handle is made of soft, non-slip elastomer

Functional gripping surfaces and exact closing, induction hardened cutting edges

For industrial applications in particular, the diversity of tools and the demands made upon them have increased dramatically.
Here the Wiha Industrial pliers series has proven to be ideal. It combines the advantages of the Wiha Professional and Basic series: pleasant handling, a concise shape and a flexible range.

With DynamicJoint, Wiha Industrial implements the new generation of precision joints: cuts are powerful and at the same time more energy-saving than ever before. Tests have proven: up to 40% less expenditure of effort is a convincing argument.

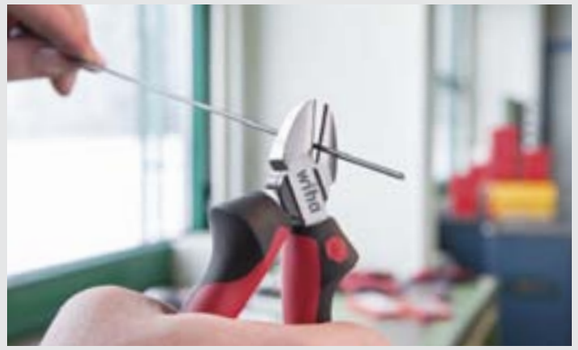



Wiha Industrial pliers offer a secure hold when gripping, bending and cutting soft and hard wire.

*Up to **40% less force** for cutting. The low expenditure of energy thanks to DynamicJoint is especially advantageous when cutting a large number of hard objects.*

Wiha Industrial.

- **Powerful**
  With DynamicJoint, the high quality joint construction for simple, long-term cutting efficiency
- **As hard as steel**
  Pliers head drop forged from high quality steels
- **Robust and durable**
  Cutting edges are individually tempered and additionally induction hardened, joints are extremely wear resistant and can withstand high stresses, and with high-quality riveting
- **Ergonomic**
  Extra wide handle backs, with soft and hard zones perfectly distributed across the handle
- **Attractive**
  Award-winning design with high quality chrome-plated head

Wiha Industrial.

Comfortable in your hand, versatile in application.

Combination and high leverage combination pliers.

NEW

Z 01 0 02 **Combination pliers Industrial.**

Standards: DIN ISO 5746.
Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws.
Cutting edges additionally induction hardened to approx. 62 HRC.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, tempered.
Application: General purpose pliers for gripping and holding as well as cutting soft and hard wires and cables.

Order-No.	mm	"	○	◎	●		
30979 4	160	6 ½	3.0	2.0		195	5
30826 1	180	7	3.4	2.2		245	5
30978 7	200	8	3.6	2.5		325	5

NEW

Z 02 0 02 **High-leverage combination pliers Industrial.**

Standards: DIN ISO 5746.
Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws.
Particularly powerful leverage results in 40% less effort being required for cutting tasks compared with standard combination pliers.
Cutting edges additionally inductively hardened to approx. 64 HRC, therefore also appropriate for cutting piano wire.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, specially tempered.
Application: Power assisted general purpose pliers for gripping and holding as well as cutting wires and cables ranging in hardness from soft to extremely hard.

Order-No.	mm	"	○	◎	●		
32319 6	200	8	3.8	2.8	2.3	315	5
32320 2	225	9	4.4	3.0	2.5	370	5

Flat and round-nose pliers.

Z 07 0 02 **Long flat-nose pliers Industrial.**

Standards: DIN ISO 5745.
Head shape: Extra long head.
Design: Gripping surfaces serrated and inductively hardened.
Material: High-quality tool steel, tempered.
Application: Gripping and right-angled bending of wires and sheet metal parts.

Order-No.	mm	"		
32330 1	160	6 ½	160	5

Z 09 0 02 **Long round-nose pliers Industrial.**

Standards: DIN ISO 5745.
Head shape: Extra long head.
Design: Gripping surfaces serrated and inductively hardened.
Material: High-quality tool steel, tempered.
Application: Gripping and bending of wires and sheet metal parts.

Order-No.	mm	"		
32332 5	160	6 ½	140	5

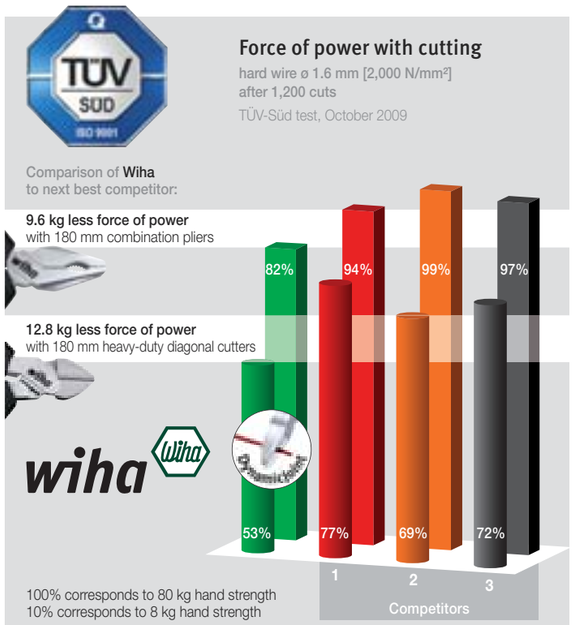

Needle nose pliers with cutting edge (snipe nose pliers).

Z 05 0 02 **Needle nose pliers Industrial with cutting edge.**

Standards: DIN ISO 5745.
Head shape: Straight shape.
Design: Extra long cutting edge for flat and round cables.
Gripping surfaces serrated in parts.
Cutting edges additionally induction hardened to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Gripping and holding as well as cutting soft and hard wires and cables.
Preferred choice in the mechanical sector.

Order-No.	mm	"	○	◎		
32322 6	160	6 ½	2.5	1.8	155	5
32323 3	200	8	2.8	2.0	200	5

Z 05 1 02 **Needle nose pliers Industrial with cutting edge.**

Standards: DIN ISO 5745.
Head shape: Angled, approx. 40°.
Design: Extra long cutting edge for flat and round cables.
Gripping surfaces serrated in parts.
Cutting edges additionally induction hardened to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Gripping and holding as well as cutting soft and hard wires and cables.
Preferred choice in the mechanical sector.

Order-No.	mm	"	○	◎		
32324 0	160	6 ½	2.5	1.8	155	5
32328 8	200	8	2.8	2.0	200	5

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	Soft wire	Copper, aluminium	220 - 250
○	Medium hard wire	Iron nail	750 - 800
◎	Hard wire	Spring wire, steel nails	1.600 - 1.800
●	Piano wire	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Diagonal cutters and heavy duty diagonal cutters.

NEW

Z 12 0 02 **Diagonal cutters Industrial.**

Standards: DIN ISO 5749.
Head shape: Semi-circular, swedish style.
Design: Low wear lap joint, riveted and able to withstand high loads.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Lightweight action, clean cutting achieved by specially milled precision cutting edges.
Durable cutting edges due to additional induction hardening to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: For soft and hard wires.

Order-No.	mm	"	○	◎	●		
30975 6	140	5 ½	4.0	2.5	1.8	160	5
30827 8	160	6 ½	4.0	2.8	2.0	200	5
30976 3	180	7	4.0	3.0	2.5	250	5

NEW

Z 16 0 02 **Heavy-duty diagonal cutters Industrial.**

Standards: DIN ISO 5749.
Head shape: Semi-circular.
Design: Low wear lap joint, riveted and able to withstand high levels of load.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Lightweight action, clean cutting achieved by specially milled precision cutting edges.
Long term cutting is achieved through additional inductive hardening to approx. 64 HRC.
Material: High-quality tool steel, tempered.
Application: Power assisted, all round diagonal cutter for soft wire as well as the most stringent of demands made by piano wires.

Order-No.	mm	"	○	◎	●		
32333 2	160	6 ½	3.5	2.5	2.0	190	5
32339 4	180	7	3.8	2.7	2.3	260	5
32341 7	200	8	4.2	3.0	2.5	315	5

Wiha Industrial.

Comfortable in your hand, versatile in application.

Stripping and water pump pliers.

Z 55 0 02 **Stripping pliers Industrial.**

Standards: DIN ISO 5743.
Head shape: Precision cutting edge prism for even cutting of cable insulation.
Design: An easy to use adjusting screw allows the stripping diameter to be set. Opening spring for effortless and sensitive handling of pliers.
Material: High-quality tool steel, tempered.
Application: Simple stripping of cables and strands of up to ø 5 mm = 10 mm² conductor cross-section.

Order-No.	mm	"			
32345 5	160	6 ½	155		5

Z 21 0 02 **Water pump pliers Industrial.**

Standards: DIN ISO 8976.
Head shape: Narrow head, therefore also appropriate for work in small spaces.
Design: Precision adjustment joint, box type, providing optimum adaptation to object to be gripped.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome vanadium tool steel, tempered.
Application: For gripping and holding pipes and angular profiles such as hex nuts in the installation area.

Order-No.	mm	"				
32342 4	250	10	2	50	380	5

Z 22 0 02 **Water pump pliers Industrial with push button adjustment.**

Standards: DIN ISO 8976.
Head shape: Extra narrow head, therefore also appropriate for work in difficult to access areas.
Design: Precision adjustment joint, box type, providing optimum adaptation to object to be gripped.
Rapid and simple push button setting and locking.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome vanadium tool steel, tempered.
Application: For gripping and holding pipes and angular profiles such as hex nuts in the installation area.

Order-No.	mm	"				
32352 3	250	10	2	50	400	5

Tool set.

Z 99 0 006 02 **Tool set Industrial Mix, 5 pcs.**

Design: Pliers of high quality tool steel, hardened and polished.
Multi-component handles with slip guard for safe and comfortable operation.
Wiha SoftFinish® screwdriver with round blade and ChromTop® blade tip:
Weight 755 g.

Content:
Diagonal cutters, series Z 12 0 02, 160 mm – with Wiha DynamicJoint
Combination pliers, series Z 01 0 02, 180 mm – with Wiha DynamicJoint
Wiha SoftFinish® screwdriver:
– slotted screwdriver, series 302: 3.5x100 / 5.5x125
– Phillips screwdriver, series 311: PH2x100

Application: The professional set of pliers and screwdrivers for demanding craftsmen and industrial mechanics.

Order-No.	Series	
30824 7	Z 99 0 006 02	1

Opening width of water pump pliers.
Maximum gripper width across flats [mm]
Maximum gripper pipe diameter ["]

Wiha Basic.

The complete workshop range.

Pipe, wire, sheet metal parts, cable, springs, nails, bolts and screws, safety rings, wire-end sleeves: the tool needs to be as diverse as the materials and tasks it faces in everyday work.

The most suitable prerequisites are supplied by the Wiha Basic range of pliers: over 80 pliers have been tested in all possible application scenarios. And Wiha continues to perfect them: DynamicJoint for example, the progressive development of the joint construction, ensures significantly easier cutting. And the precise Wiha MagicTips stabilise and protect the circlip pliers.

Wiha Basic – tried-and-true quality at a competitive price, with an appealing design.

Power assisted, all round end cutting nippers for soft wires as well as demanding piano wires.

*Up to **40% less force** for cutting.*
The low expenditure of energy thanks to DynamicJoint is especially advantageous when cutting a large number of hard objects.

Wiha Basic.

- **Powerful**
  With DynamicJoint, the high quality joint construction for simple, long-term cutting efficiency
- **Extra rugged, right up to the tips**
  With Wiha MagicTips, the precision tips that ensure a firm hold with unexcelled stability
- **As hard as steel**
  Pliers head drop forged from high quality steels
- **Robust and durable**
  Cutting edges are individually tempered and additionally induction hardened to approx. 64 HRC; joints are extremely wear resistant and withstand high stresses, with high-quality riveting
- **Ergonomic**
  An ergonomic handle shape for optimal handling
- **Attractive**
  An appealing design, with a multi-polished head

Wiha Basic.

The complete workshop range.

Combination, high leverage combination and stripping pliers.

NEW

Z 01 0 01 **Combination pliers Basic.**

Standards: DIN ISO 5746.
Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws.
Cutting edges additionally induction hardened to approx. 62 HRC.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, tempered.
Application: General purpose pliers for gripping and holding as well as cutting soft and hard wires and cables.

Order-No.	mm	"				
26703 2	160	6 ½	3.0	2.0	160	5
26706 3	180	7	3.4	2.2	205	5
26709 4	200	8	3.6	2.5	280	5

NEW

Z 02 0 01 **High leverage combination pliers Basic.**

Standards: DIN ISO 5746.
Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws.
Particularly powerful leverage results in 40% less effort being required for cutting tasks compared with standard combination pliers.
Cutting edges additionally inductively hardened to approx. 64 HRC, therefore also appropriate for cutting piano wire.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, specially tempered.
Application: Power assisted general purpose pliers for gripping and holding as well as cutting wires and cables ranging in hardness from soft to extremely hard.

Order-No.	mm	"					
26712 4	200	8	3.8	2.8	2.3	275	5
26715 5	225	9	4.2	3.0	2.5	330	5

Z 55 0 01 **Stripping pliers Basic.**

Standards: DIN ISO 5743.
Head shape: Precision cutting edge prism for even cutting of cable insulation.
Design: An easy to use adjusting screw allows the stripping diameter to be set.
Opening spring for effortless and sensitive handling of pliers.
Material: High-quality tool steel, tempered.
Application: Simple stripping of cables and strands of up to ø 5 mm = 10 mm² conductor cross-section.

Order-No.	mm	"		
26845 9	160	6 ½	125	5

Long-flat and needle nose pliers.

Z 07 0 01 **Long-flat nose pliers Basic.**

Standards: DIN ISO 5745.
Head shape: Extra long head.
Design: Ridged gripping surfaces.
Material: High-quality tool steel, tempered.
Application: Gripping and right-angled bending of wires and sheet metal parts.

Order-No.	mm	"		
26730 8	160	6 ½	130	5

Z 05 0 01 **Needle nose pliers Basic with cutting edge.**

Standards: DIN ISO 5745.
Head shape: Straight shape.
Design: Extra long cutting edge for flat and round cables.
Gripping surfaces serrated in parts.
Cutting edges additionally induction hardened to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Gripping and holding as well as cutting soft and hard wires and cables.
Preferred choice in the mechanical sector.

Order-No.	mm	"				
26718 6	160	6 ½	2.5	1.8	120	5
26721 6	200	8	2.8	2.0	165	5

Z 05 1 01 **Needle nose pliers Basic with cutting edge.**

Standards: DIN ISO 5745.
Head shape: Angled, approx. 40°.
Design: Extra long cutting edge for flat and round cables.
Gripping surfaces serrated in parts.
Cutting edges additionally induction hardened to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Gripping and holding as well as cutting soft and hard wires and cables.
Preferred choice in the mechanical sector.

Order-No.	mm	"				
26723 0	160	6 ½	2.5	1.8	120	5
26725 4	200	8	2.8	2.0	165	5

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	Soft wire	Copper, aluminium	220 - 250
○	Medium hard wire	Iron nail	750 - 800
○	Hard wire	Spring wire, steel nails	1.600 - 1.800
●	Piano wire	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Round-nose pliers and power/diagonal cutters.

Z 09 0 01 **Long-round nose pliers Basic.**

Standards: DIN ISO 5745.
Head shape: Extra long head.
Design: Ridged gripping surfaces.
Material: High-quality tool steel, tempered.
Application: Gripping and bending of wires and sheet metal parts.

Order-No.	mm	"		
26733 9	160	6 ½	110	5

NEW

Z 12 0 01 **Diagonal cutters Basic.**

Standards: DIN ISO 5749.
Head shape: Semi-circular, swedish style.
Design: Low wear lap joint, riveted and able to withstand high loads.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Lightweight action, clean cutting achieved by specially milled precision cutting edges. Durable cutting edges due to additional induction hardening to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: For cutting of soft and hard wire.

Order-No.	mm	"					
26738 4	140	5 ½	4.0	2.5	1.8	130	5
26739 1	160	6 ½	4.0	2.8	2.0	170	5
26742 1	180	7	4.0	3.0	2.5	220	5

NEW

Z 16 0 01 **Heavy duty diagonal cutters Basic.**

Standards: DIN ISO 5749.
Head shape: Semi-circular.
Design: Low wear lap joint, riveted and able to withstand high levels of load.
The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Lightweight action, clean cutting achieved by specially milled precision cutting edges. Long term cutting is achieved through additional inductive hardening to approx. 64 HRC.
Material: High-quality tool steel, specially tempered.
Application: Power-assisted all-round diagonal cutter for cutting soft to extremely hard wires and cables.

Order-No.	mm	"					
26746 9	160	6 ½	3.5	2.5	2.0	160	5
26749 0	180	7	3.8	2.7	2.3	220	5
26752 0	200	8	4.2	3.0	2.5	275	5

Cable cutter and crimping pliers.

NEW

Z 50 1 01 **Cable cutters Basic.**

Head shape: Classic cutting form.
Design: Light, energy-saving and clean cutting with specially ground precision cutting edges.
Durable cutting edges due to additional induction hardening to approx. 62 HRC.
Safety stop prevents finger injuries after cutting.
Material: High-quality tool steel, tempered.
Application: Cable cutter for cutting of copper and aluminium cables without crushing, also suitable for stripping.
Not for steel cable, wires and copper conductors with hard coatings.

Order-No.	mm	"	Ø	mm²		
34729 1	160	6 ½	16	50	150	5
34730 7	200	8	20	60	270	5

Z 60 0 01 **Crimping pliers for end sleeves Basic.**

Standards: DIN ISO 5743.
Head shape: Fixed profile grooves for the relevant conductor cross-sections.
Design: Trapezoidal or semi-circular profiles for a secure connection between end sleeve and conductor.
Sleeve and conductor inserted from the side.
Material: High-quality tool steel, tempered.
Application: For crimping end sleeves acc. to DIN 46228 parts 1 + 4.

Order-No.	mm	"	mm²		
28330 8	145	5 ¾	0.25-2.5	130	5
30066 1	180	7	0.25-16	250	5

Wiha Info

NEW

Wiha DynamicJoint – Top of their class

- **Innovative:** Unique joint construction, patent applied for
- **Effective:** Low loss of force means **less force needed for cutting** – up to 40%
- **Permanent:** Optimal performance even after thousands of cuts

*Up to **40% less force** for cutting*

Wiha Basic.

The complete workshop range.

Water pump pliers.

Z 21 0 01 **Water pump pliers Basic, box type.**

Standards: DIN ISO 8976.
Head shape: Narrow head, therefore also appropriate for work in small spaces.
Design: Precision adjustment joint, box type, providing optimum adaptation to object to be gripped.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome vanadium tool steel, tempered.
Application: For gripping and holding pipes and angular profiles such as hex nuts in the installation area.

Order-No.	mm	"				
26760 5	180	7	1	30	145	5
26761 2	250	10	2	50	345	5
26763 6	300	12	2 ½	63	555	5

Water pump pliers.

Z 23 0 01 **QuickFix water pump pliers Basic, box type.**

Standards: DIN ISO 8976.
Head shape: Narrow head, therefore also appropriate for work in small spaces.
Design: Fast and easy-to-adjust water pump pliers, with automatic adjustment of the box type, precision-stepped joint.
Optimum adjustment to the object to be gripped.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome vanadium tool steel, tempered.
Application: For rapid and optimum gripping and holding of pipes and angular profiles such as hex nuts in the installation area.

Order-No.	mm	"				
26768 1	250	10	1 ½	40	360	5

Z 22 0 01 **Water pump pliers Basic with push button setting.**

Standards: DIN ISO 8976.
Head shape: Extra narrow head, therefore also appropriate for work in difficult to access areas.
Design: Precision adjustment joint, box type, providing optimum adaptation to object to be gripped.
Rapid and simple push button setting and locking.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome vanadium tool steel, tempered.
Application: For gripping and holding pipes and angular profiles such as hex nuts in the installation area.

Order-No.	mm	"				
26764 3	180	7	1	30	150	5
26765 0	250	10	2	50	365	5
26767 4	300	12	2 ½	63	570	5

Opening width of water pump pliers.

- Maximum gripper width across flats [mm]
- Maximum gripper pipe diameter ["]

Symbols.

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	**Soft wire**	Copper, aluminium	220 - 250
○	**Medium hard wire**	Iron nail	750 - 800
○	**Hard wire**	Spring wire, steel nail	1.600 - 1.800
●	**Piano wire**	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Dimensions.

- Maximum gripper width across flats
- Maximum gripper pipe diameter
- Opening width, flat
- Clamping range
- Retaining ring, external
- Retaining ring, internal

Jaw style:	Cutter style:
Flat jaws	Cutter without bevel
Half round jaws	Cutter with small bevel
Round jaws	Cutter with bevel
	Center cutter
	Scissors cutter
	Anvil cutter
	Stripper

End cutting nippers and pincers.

Z 17 0 01 **Basic end cutting nippers.**

Standards: DIN ISO 5748.
Head shape: Classic style.
Design: Low wear lap joint, riveted and able to withstand high levels of load.
Striking high quality cutting edge with high cutting performance and low application of force due to highly precise processing.
Good durability due to additional induction hardening of cutting edges to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Power assisted, all round diagonal cutter for soft wires as well as demanding piano wires.
Also appropriate for binding (plaiting) and cutting wire netting in reinforced concrete structures.

Order-No.	mm	"				
26757 5	160	6 ½	3.5	2.5	180	5
26758 2	180	7	3.8	2.8	200	5
26759 9	200	8	4.0	3.0	220	5

Z 30 0 01 **Pincers (carpenter's pincers) Basic.**

Standards: DIN ISO 9243.
Head shape: Classic style.
Design: Low wear lap joint, riveted and able to withstand high levels of load.
Striking high quality cutting edge with high cutting performance and low application of force due to highly precise processing.
Good durability due to additional induction hardening of cutting edges to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: For withdrawing and cutting nails and wire pins.

Order-No.	mm	"		
26771 1	180	7	265	5
26772 8	200	8	350	5

Monier pliers (rabitz pliers).

Z 31 0 01 **Concretors pincers Basic.**

Standards: DIN ISO 9242.
Head shape: Classic style.
Design: Low wear lap joint, riveted and able to withstand high levels of load.
High quality cutting edge with high cutting performance and low application of force due to highly precise processing.
Good durability due to additional induction hardening of cutting edges to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: For binding (plaiting) and cutting wire netting in reinforced concrete structures in a single operation.

Order-No.	mm	"				
26774 2	220	8 ¾	3.2	2.0	360	5
26776 6	250	10	3.5	2.2	425	5
26778 0	280	11	3.8	2.4	460	5
26780 3	300	12	3.8	2.4	485	5

Z 31 0 00 **Concretors pincers Basic.**

Standards: DIN ISO 9242.
Head shape: Classic style.
Design: High quality cutting edge with high cutting performance and low application of force due to highly precise processing.
Good durability due to additional induction hardening of cutting edges to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: For binding (plaiting) and cutting wire netting in reinforced concrete structures in a single operation.

Order-No.	mm	"				
26773 5	220	8 ¾	3.2	2.0	350	5
26775 9	250	10	3.5	2.2	415	5
26777 3	280	11	3.8	2.4	450	5
26779 7	300	12	3.8	2.4	475	5

Wiha Info

Since pliers have moving parts and sometimes have bright steel parts, they require a certain amount of care:

Therefore keep the joints of the pliers as clean as possible and occasionally give them and the bright surfaces a drop of low viscosity oil which does not contain acid or resin.

You will then be able to enjoy your Wiha quality pliers for a long time to come.

Wiha Basic.

The complete workshop range.

Circlip pliers for bores (internal).

Z 33 0 01 **Internal circlip pliers Basic (for boreholes).**

Standards: DIN ISO 5256.
Head shape: Straight shape.
Design: Drop forged, cylindrical precision tips.
Material: Chrome-vanadium tool steel.
Application: For inserting / removing circlips from inside bores.

Order-No.	Typ	mm	ⅡⅡ	○		
26781 0	J 0	139	5	8-13	95	5
26782 7	J 1	140	5	12-25	95	5
26783 4	J 2	180	7	19-60	155	5
26784 1	J 3	225	9	40-100	245	5
29425 0	J 4	310	12	85-140	410	5

Z 33 1 01 **Internal circlip pliers Basic (for boreholes).**

Standards: DIN ISO 5256.
Head shape: Shape D: 90° angled shape.
Design: Drop forged, cylindrical precision tips.
Material: Chrome-vanadium tool steel.
Application: For inserting / removing circlips from inside bores.

Order-No.	Typ	mm	ⅡⅡ	○		
26785 8	J 01	139	5	8-13	95	5
26786 5	J 11	140	5	12-25	95	5
26787 2	J 21	180	7	19-60	155	5
26788 9	J 31	225	9	40-100	245	5
29427 4	J 41	310	12	85-140	410	5

Circlip pliers for shafts (external).

Z 34 0 01 **External circlip pliers Basic (for shafts).**

Standards: DIN ISO 5254.
Head shape: Straight shape.
Design: Drop forged, cylindrical precision tips.
Material: Chrome-vanadium tool steel.
Application: For fitting / removing circlips externally to / from shafts or axles.

Order-No.	Typ	mm	ⅡⅡ	○		
26789 6	A 0	139	5	3-10	90	5
26790 2	A 1	140	5	10-25	90	5
26791 9	A 2	180	7	19-60	155	5
26792 6	A 3	225	9	40-100	260	5
29428 1	A 4	310	12	85-140	455	5

Z 34 1 01 **External circlip pliers Basic (for shafts).**

Standards: DIN ISO 5254.
Head shape: Shape D: 90° angled shape.
Design: Drop forged, cylindrical precision tips.
Material: Chrome-vanadium tool steel.
Application: For fitting / removing circlips externally to / from shafts or axles.

Order-No.	Typ	mm	ⅡⅡ	○		
26794 0	A 01	139	5	3-10	90	5
26795 7	A 11	140	5	10-25	90	5
26796 4	A 21	180	7	19-60	155	5
26797 1	A 31	225	9	40-100	260	5
29429 8	A 41	310	12	85-140	455	5

Wiha Info

NEW

Wiha MagicTips –
Top of their class

- **Maximum grip:** The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique
- **Hard as steel:** Additional hardening of tips means high wear resistance and therefore excellent durability
- **Surface refined:** Protected against rust
- **Precise:** Precision tips of special high performance steel for maximum grip and high stability

Special latching function prevents jumping away of the safety rings

Circlip pliers for bores (internal).

NEW

Z 33 4 01 **Internal circlip pliers Basic (for boreholes).**

Standards: DIN ISO 5256.
Head shape: Straight shape.
Design: Wiha MagicTips – highly resilient precision tips manufactured from special high performance steel.
With special surface finish to protect against rust and with a unique latching function that effectively prevents jumping away of the safety rings.
High wear resistance with additional hardening of tips.
Slim plier head for optimal access and a good view of the workpiece.
Material: Chrome vanadium tool steel, tempered.
Application: For inserting / removing circlips from inside bores.

Order-No.	Typ	mm	ⅡⅡ	○		
34688 1	J 0	140	5	8-13	95	5
34689 8	J 1	140	5	12-25	95	5
34690 4	J 2 •	180	7	19-60	155	5
34691 1	J 3 •	220	9	40-100	245	5
34692 8	J 4 •	305	12	85-140	410	5

• with latching function

NEW

Z 33 5 01 **Internal circlip pliers Basic (for boreholes).**

Standards: DIN ISO 5256.
Head shape: Angled form.
Design: Wiha MagicTips – highly resilient precision tips manufactured from special high performance steel.
With special surface finish to protect against rust and with a unique latching function that effectively prevents jumping away of the safety rings.
High wear resistance with additional hardening of tips.
Slim plier head for optimal access and a good view of the workpiece.
Spring protected in the joint, cannot be lost.
Material: Chrome vanadium tool steel, tempered.
Application: For inserting / removing circlips from inside bores.

Order-No.	Typ	mm	ⅡⅡ	○		
34693 5	J 01	140	5	8-13	95	5
34694 2	J 11	140	5	12-25	95	5
34695 9	J 21 •	180	7	19-60	155	5
34696 6	J 31 •	220	9	40-100	245	5
34697 3	J 41 •	305	12	85-140	410	5

• with latching function

Circlip pliers for shafts (external).

NEW

Z 34 4 01 **External circlip pliers Basic (for shafts).**

Standards: DIN ISO 5254.
Head shape: Straight shape.
Design: Wiha MagicTips – highly resilient precision tips manufactured from special high performance steel.
With special surface finish to protect against rust and with a unique latching function that effectively prevents jumping away of the safety rings.
High wear resistance with additional hardening of tips.
Slim plier head for optimal access and a good view of the workpiece.
Material: Chrome vanadium tool steel, tempered.
Application: For fitting / removing circlips externally to / from shafts or axles.

Order-No.	Typ	mm	ⅡⅡ	○		
34698 0	A 0	140	5	7-10	90	5
34699 7	A 1	140	5	10-25	90	5
34700 0	A 2 •	185	7	19-60	155	5
34701 7	A 3 •	240	9	40-100	260	5
34702 4	A 4 •	300	12	85-140	455	5

• with latching function

NEW

Z 34 5 01 **External circlip pliers Basic (for shafts).**

Standards: DIN ISO 5254.
Head shape: Angled form.
Design: Wiha MagicTips – highly resilient precision tips manufactured from special high performance steel.
With special surface finish to protect against rust and with a unique latching function that effectively prevents jumping away of the safety rings.
High wear resistance with additional hardening of tips.
Slim plier head for optimal access and a good view of the workpiece.
Spring protected in the joint, cannot be lost.
Material: Chrome vanadium tool steel, tempered.
Application: For fitting / removing circlips externally to / from shafts or axles.

Order-No.	Typ	mm	ⅡⅡ	○		
34703 1	A 01	140	5	7-10	90	5
34704 8	A 11	140	5	10-25	90	5
34705 5	A 21 •	185	7	19-60	155	5
34706 2	A 31 •	240	9	40-100	260	5
34707 9	A 41 •	300	12	85-140	455	5

• with latching function

Wiha Basic.

The complete workshop range.

Pipe wrenches swedish style.

Z 26 0 00 **Pipe wrenches swedish style Basic, S-jaw.**

Standards: DIN 5234.
Head shape: S-jaw shape angled 45°.
Design: Self-clamping gripping of pipes and hex nuts at 3 points.
Torsion-free handle profile.
Adjusting nut secured to prevent loss.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome-vanadium steel, tempered.
Application: Safe and secure grip on pipes and hex nuts.

Order-No.	mm				
29435 9	**320**	**1**	0-40	750	1
29436 6	**420**	**1 ½**	0-55	1350	1
29437 3	**535**	**2**	0-67	2450	1

Pipe wrenches swedish style.

Z 26 2 00 **Pipe wrenches swedish style Basic, 90°.**

Standards: DIN 5234.
Head shape: Swedish shape angled 90°.
Design: Safe and secure grip due to teeth that are offset against the direction of rotation. Torsion-free handle profile.
Adjusting nut secured to prevent loss.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome-vanadium steel, tempered.
Application: Safe and secure grip on pipes, flat workpieces and nuts.

Order-No.	mm				
29441 0	**320**	**1**	0-40	750	1
29442 7	**415**	**1 ½**	0-55	1250	1
29443 4	**555**	**2**	0-67	2450	1

Z 26 1 00 **Pipe wrenches swedish style Basic, 45°.**

Standards: DIN 5234.
Head shape: Swedish shape angled 45°.
Design: Safe and secure grip due to teeth that are offset against the direction of rotation.
Torsion-free handle profile.
Adjusting nut secured to prevent loss.
Long durability achieved by additional inductive hardening of gripper jaws.
Material: Chrome-vanadium steel, tempered.
Application: Safe and secure grip on pipes, flat workpieces and nuts.

Order-No.	mm				
29438 0	**315**	**1**	0-40	750	1
29439 7	**420**	**1 ½**	0-55	1240	1
29440 3	**570**	**2**	0-67	2500	1

Symbols.

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	**Soft wire**	Copper, aluminium	220 - 250
○	**Medium hard wire**	Iron nail	750 - 800
○	**Hard wire**	Spring wire, steel nail	1.600 - 1.800
●	**Piano wire**	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Dimensions.

- Maximum gripper width across flats
- Maximum gripper pipe diameter
- Opening width, flat
- Clamping range
- Retaining ring, external
- Retaining ring, internal

Jaw style:	Cutter style:
Flat jaws	Cutter without bevel
Half round jaws	Cutter with small bevel
Round jaws	Cutter with bevel
	Center cutter
	Scissors cutter
	Anvil cutter
	Stripper

Grip pliers.

Z 66 0 00 **Grip pliers Basic with wire cutter.**

Head shape: Bent gripper jaws with wire cutter.
Design: Single-handed operation with quick-release lever, adjusting screw and integrated wire cutter.
Material: Forged jaws made of chrome-vanadium-steel.
Body of pliers made of high-resistance special steel, nickel-plated.
Application: Clamping and gripping of round and flat material.
Wire cutter for cutting welded wires.

Order-No.	mm	"				
29485 4	**180**	**7**	8-30	0-20	360	5
29486 1	**250**	**10**	8-40	0-20	530	5
29487 8	**300**	**12**	8-65	0-30	1000	5

Grip pliers.

Z 67 1 00 **Pipe welding grip pliers Basic.**

Head shape: U-shaped, with two supporting surfaces.
Design: Single-handed operation with quick-release lever and adjusting screw.
Material: Clamping jaw made of robust and heat-resistant cast iron.
Body of pliers made of high-resistance special steel, nickel-plated.
Application: Clamping and gripping of adjacent round materials during welding.

Order-No.	mm	"			
29489 2	**280**	**11**	10-72	912	2

Z 67 0 00 **Welding grip pliers Basic.**

Head shape: U-shaped, with two supporting surfaces.
Design: Single-handed operation with quick-release lever and adjusting screw.
Material: Clamping jaw made of robust and heat-resistant cast iron.
Body of pliers made of high-resistance special steel, nickel-plated.
Application: Clamping and gripping of adjacent profiled or flat materials during welding.

Order-No.	mm	"				
29488 5	**280**	**11**	35-65	0-25	900	2

Z 67 2 00 **Profile welding grip pliers Basic (clamp grip pliers).**

Head shape: C-shaped, with rounded supporting surface.
Design: Single-handed operation with quick-release lever and adjusting screw.
Material: Forged jaws made of chrome-vanadium-steel.
Body of pliers made of high-resistance special steel, nickel-plated.
Application: Clamping and gripping of awkward-shaped workpieces or sections with high ridges.
Profile height up to 40 mm, profile depth up to 50 mm.

Order-No.	mm	"			
29490 8	**280**	**11**	0-90	660	2

Opening width of grip pliers.

- Maximum gripper width across flats [mm]
- Maximum opening width at jaw flats [mm]

Wiha Basic.

The complete workshop range.

Pliers sets.

Z 99 0 001 0 **Pliers set Basic, 3 pcs.**

Design: All pliers made of high-quality tool steel, hardened.
Head of pliers polished several times and non-slip,
oil- and solvent-resistant handle coating.
Weight 630 g.

Content: **Combination pliers,** series Z 01 0 01, 180 mm
– with Wiha DynamicJoint
Diagonal cutters, series Z 12 0 01, 160 mm
– with Wiha DynamicJoint
Needle nose pliers series Z 05 0 01, 160 mm

Application: Standard set of pliers for the basic set of tools.

Order-No.	Series	
26850 3	Z 99 0 001 01	1

Z 99 0 002 01 **Pliers set Basic Plus, 3 pcs.**

Design: All pliers in proven basic quality.
Cutting pliers also suitable for piano wire.
QuickFix water pump pliers with "automatic" rapid adjustment.
Weight 1025 g.

Content: **High leverage combination pliers,** series Z 02 0 01, 200 mm
– with Wiha DynamicJoint
High leverage diagonal cutters, series Z 16 0 01, 180 mm
– with Wiha DynamicJoint
QuickFix water pump pliers series Z 23 0 01, 250 mm

Application: Power-assisted set of pliers as part of basic set of tools.

Order-No.	Series	
26853 4	Z 99 0 002 01	1

Tool set.

Z 99 0 003 01 **Tool set Basic Mix, 5 pcs.**

Design: All pliers made of high-quality tool steel, hardened.
Head of pliers polished several times and non-slip,
oil- and solvent-resistant handle coating.
Screwdrivers with round blades, chrome-plated,
tips with Wiha ChromTop®.
Multi-component handles with slip guard for safe and comfortable operation.
Weight 745 g.

Content: **Combination pliers** Z 01 0 01, 180 mm
– with Wiha DynamicJoint
Diagonal cutters, series Z 12 0 01, 160 mm
– with Wiha DynamicJoint Wiha
SoftFinish® screwdriver with round blade and ChromTop® blade tip:
– slotted screwdriver, series 302: 5,5x125
– Phillips screwdriver, series 311: PH1x80 / PH2x100

Application: The basic set of pliers and screwdrivers for demanding craftsmen and industrial mechanics.

Order-No.	Series	
26855 8	Z 99 0 003 01	1

Pliers set.

Z 99 0 004 01 **Pliers set Basic Circlip, 4 pcs.**

Design: All pliers in proven basic quality.
Particularly precise tips due to high-speed turning,
cylindrical with defined flat cone point.
Tightened with great dimensional accuracy and not subsequently curved.
Weight 680 g.

Content: **Circlip pliers for bores,**
series Z 33 0 01, **J10**
Circlip pliers for bores,
series Z 33 0 01, **J20**
Circlip pliers for shafts,
series Z 34 0 01, **A10**
Circlip pliers for shafts,
series Z 34 0 01, **A20**

Application: Set of pliers as basic set of tools for attaching retaining rings to and removing them from shafts and boreholes.

Order-No.	Series	
26793 3	Z 99 0 004 01	1

Pliers set.

NEW

Z 99 0 007 01 **Pliers set Basic Circlip, 4 pcs.**

Design: Wiha MagicTips – highly resilient precision tips manufactured
from special high performance steel.
High wear resistance with additional hardening of tips.
Slim plier head for optimal access and a good view of the workpiece.
Weight 650 g.

Content: **Circlip pliers for bores,** series Z 33 4 01, **J10**
– with Wiha MagicTips
Circlip pliers for bores, series Z 33 4 01, **J20**
– with Wiha MagicTips
Circlip pliers for shafts, series Z 34 4 01, **A10**
– with Wiha MagicTips
Circlip pliers for shafts, series Z 34 4 01, **A20**
– with Wiha MagicTips

Application: Set of pliers as basic set of tools for attaching retaining rings to and removing them from shafts and boreholes.

Order-No.	Series	
34708 6	Z 99 0 007 01	1

Wiha Info

NEW

Wiha MagicTips –
Top of their class

- **Maximum grip:** The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique
- **Hard as steel:** Additional hardening of tips means high wear resistance and therefore excellent durability
- **Surface refined:** Protected against rust
- **Precise:** Precision tips of special high performance steel for maximum grip and high stability

Special latching function prevents jumping away of the safety rings

Wiha Electronic.

Precision for made-to-measure work.

A calm hand is essential for working with electronic components.
The Wiha Electronic pliers optimally support the user in this respect.

The sophisticated details are conspicuous: ground, razor-sharp cutting edges for smooth cuts.
A handle shape that correctly positions the hand of the user.
A glare-free, finely pressed pliers head for precise, safe grasping and holding.

And all with an excellent quality and at a competitive price to which both professionals and demanding handymen will not be able to say no to.

The Electronic long-nose pliers from Wiha hold small components and bend wires.

Wiha Electronic.

- **Specially for fine work**
  Glare-free, phosphate coated head, applied precision joint
- **Precise**
  Precisely ground cutting edges
- **As hard as steel**
  Finely pressed from high grade C70 steel
- **Robust and durable**
  Cutting edges are additionally hardened up to 63 HRC
- **Sensitive**
  Greater control with grasping via opening spring with fine resistance
- **Ergonomic**
  An innovative handle shape for optimal handling

Diagonal cutters, wide shape.

Z 41 1 03 **Diagonal cutters Electronic.**

Head shape: Wide, pointed head.
Design: Cutting edge with full flush cutter function.
With opening spring.
Material: C 70 special tool steel.
Application: For an absolutely flush cut of soft wires in the electronics industry.

Order-No.	mm	″	○			
26818 3	**138**	**5 ½**	1.3	70		5

Z 41 3 03 **Diagonal cutters Electronic.**

Standards: DIN ISO 9654.
Head shape: Wide, pointed head.
Design: Cutting edge with semi-flush cutter function, thus also appropriate for medium hard wires.
Strong design for soft wires up to ø 2.0 mm.
With opening spring.
Material: C 70 special tool steel.
Cutting edges > 60 HRC.
Application: Universal small diagonal cutter for cutting soft and medium hard wires in the electronics and precision mechanical engineering industries.

Order-No.	mm	″	○			
26815 2	**138**	**5 ½**	2.0	0.8	80	5

Diagonal cutters, wide shape with wire trapping spring.

Z 41 6 03 **Diagonal cutters Electronic with wire trapping spring.**

Head shape: Wide, pointed head.
Design: Cutting edge with full flush cutter function.
With opening spring and fixture for collecting ends of wires that have been cut off.
Material: C 70 special tool steel.
Cutting edges approx. 56 HRC.
Application: For an absolutely flush cut of soft wires in the electronics industry.

Order-No.	mm	″	○		
26825 1	**138**	**5 ½**	1.3	80	5

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	**Soft wire**	Copper, aluminium	220 - 250
○	**Medium hard wire**	Iron nail	750 - 800
○	**Hard wire**	Spring wire, steel nails	1.600 - 1.800
●	**Piano wire**	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Wiha Info

Electronics pliers with cutting edges are designed especially for cutting soft to medium hard wires.

The diameters of materials which your electronics pliers are able to cut depend not only on the material selected and the hardness of the cutting edges but also depend greatly on the geometry of the cutting edges:

- Pliers with the full flush cutter function may cut off wires smoothly and flushly but are only appropriate for soft copper wires (99.85% pure copper)
- Pliers with the semi-flush and normal bevelled cutting edges function on the other hand may not cut in a totally flush manner but can cut thin iron wires or even medium hard steel wire
- You will find details of precise cutting results in the individual figures of pliers

Wiha Electronic.

Precision for made-to-measure work.

Diagonal cutters, narrow shape.

Z 40 0 03 **Micro diagonal cutter Electronic.**

Head shape: Extra narrow, short head for working in particularly restricted spaces.
Design: Cutting edge with full flush cutter function.
With opening spring.
Material: C 70 special tool steel.
Application: For absolutely flush cutting of soft wires in places which are difficult to access in the electronics industry.

Order-No.	mm	″	○		
26812 1	**118**	**4 ½**	0.8	60	5

Z 40 1 03 **Diagonal cutters Electronic with wire trapping spring.**

Head shape: Narrow, pointed head.
Design: Cutting edge with full flush cutter function.
With opening spring and fixture for collecting ends of wires that have been cut off.
Material: C 70 special tool steel.
Application: For absolutely flush cutting of soft wires in places which are difficult to access in the electronics industry.

Order-No.	mm	″	○		
26813 8	**128**	**5**	1.0	70	5

Diagonal cutters.

Z 46 0 03 **Oblique cutting nippers Electronic.**

Head shape: Wide, pointed head.
Design: Cutting edge with full flush cutter function.
With cutting edge at 48° for cutting obliquely from above or from the side.
Material: C 70 special tool steel.
Application: For absolutely flush cutting of soft wires in places which are difficult to access in the electronics industry.

Order-No.	mm	″	○		
26833 6	**138**	**5 ½**	1.3	70	5

Z 46 0 03 **Micro oblique cutting nippers Electronic.**

Head shape: Extremely narrow, short head for working in particullarly restricted spaces.
Design: Cutting edge with full flush cutter function.
Edge at 30° to face end of pliers for cutting obliquely from above or from the side.
Material: C 70 special tool steel.
Application: For absolutely flush cutting of soft wires in places which are difficult to access in the electronics industry.

Order-No.	mm	″	○		
26830 5	**118**	**4 ½**	0.6	60	5

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	**Soft wire**	Copper, aluminium	220 - 250
◯	**Medium hard wire**	Iron nail	750 - 800
◉	**Hard wire**	Spring wire, steel nails	1.600 - 1.800
●	**Piano wire**	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Needle nose pliers

Z 36 0 03 **Pointed pliers Electronic.**

Head shape: Narrow, short head.
Design: With plain inside jaws.
Width at tip is only 1.2 mm.
Material: C 70 special tool steel.
Application: For holding small components as well as for holding and angling wires.

Order-No.	mm	″		
26801 5	**135**	**5 ½**	70	5

Stripping pliers.

Z 49 2 03 **Electronic stripping pliers.**

Head shape: Wide, long head with ridged gripping surface, shears blade and firm wire stripping stations.
Design: Wire stripping stations:
0.8 / 1.0 / 1.3 / 1.6 / 2.0 / 2.6 mm,
AWG 20 / 18 / 16 / 14 / 12 / 10.
With opening spring and locking mechanism.
Material: C 70 special tool steel.
Application: For gripping, cutting and stripping of wires with diameter.

Order-No.	mm	″	Ø mm	AWG		
33471 0	**180**	**7**	0.81 - 2.59	20 - 10	70	5

Z 49 7 03 **Electronic stripping pliers.**

Head shape: Wide, long head with ridged gripping surface, shears blade and firm wire stripping stations.
Design: Wire stripping stations:
0,4 / 0.5 / 0.6 / 0.8 / 1.0 / 1.3 mm,
AWG 26 / 24 / 22 / 20 / 18 / 16.
With opening spring and locking mechanism.
Material: C 70 special tool steel.
Application: For gripping, cutting and stripping of wires with diameter.

Order-No.	mm	″	Ø mm	AWG		
33472 7	**180**	**7**	0.4 - 1.3	26 - 16	70	5

Wiha Info

A variety of different pliers are required for electronics applications.

Simply contact us if you require different models for other applications.

Wiha soft-face hammers.

Wiha makes it possible: Optimum power transmission even in confined spaces.

Soft-face hammers range

Wiha Safety soft-face hammer.

Perfect safety in every detail. ..... 206 – 211

Wiha dead-blow hammer.

A star in the world of recoilless tools. ..... 212 – 213

All Wiha soft-face hammers carry the GS Mark.

Wiha Info

Explanation of the colour-code system

Wiha makes it easy to differentiate between different levels of hammer face hardness with it's colour coding system.

Application	Material	Hammer face
For sensitive materials: Window construction, light metal construction, furniture and interior fittings industry, light assembly, tradeshow construction	Elastomer	**soft**
For sturdy applications: Tile laying, paving, curbstone setting, prefabricated house construction, light gardening and landscaping setting tasks	Rubber	**medium-soft**
For universal applications: Tool and machine construction, metal working, automobile repairs, panel beating, sheet metal and assembly work.	Polyurethane	**medium-hard**
For heavy-duty: Assembly and disassembly, sheet metal work, building and construction work, workshop tasks	Cellulose acetate	**hard**
For striking power: Building and construction industry, foundry, mould making, road work, forestry and agriculture, gardening and landscaping	Polyamide	**very hard**

○ = Round face
□ = Square face

Wiha Safety soft-face hammer.

Perfect safety in every detail.

Safety Concept:
All parts are interlocked and clamped together by means of a nut and bolt assembly.

The specialty of the Safety Programme lies in the multitude of different colour coded hammer faces. These can, for different applications, be selected to suit your size and hardness requirements. This tool allows you to use single strikes on softer materials such as soft woods, plastics or aluminium as well as allowing for powerful repeated strikes required in foundries and tough industry applications.

Depending on the size and weight of the tool there are different hammer face options available.

All Safety Tools are equiped with hardwood Hickory handles.
Due to it's high strength properties, Hickory has proven itself over the years as the ideal handle material.

The ergonomic outline of the handle in combination with the oval shape and special finish ensure that even with sweaty or slippery hands, the handle will not rotate or slip.

The Wiha Safety soft-head hammer with black/white faces is the professional helper for garden and landscaping work.

The powder-coated safety shells made from malleable cast iron clamp the head and handle securely together.
The 840 mm long sledge hammer is the ideal length for special applications, e.g. for rail-track construction.

Wiha Safety soft-face hammer.

- Safety hammer with interchangeable faces of different hardnesses makes it the most suited hammer for all applications
- Nuts in the face and grooves in the shell provide a secure connection of the hammer housing
- High strength hickory handle guarantees longer tool life
- Each hammer piece is also available as a spare part

Wear safety glasses and protective gloves when working with soft head hammers.

In addition, observe the national standards and regulations.

Hammers with identical faces.

832-33 **Safety soft-face hammer, black/ black.**

Faces: Black: Medium soft, wear-resistant caoutchouc (rubber).
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Tile laying, paving, curbstone setting, dry wall construction, light gardening and landscaping setting tasks.

Order-No.					
26509 0	**30**	**300**	87	290	5
26431 4	**40**	**640**	110	325	5
26432 1	**50**	**1100**	131	360	2
26433 8	**60**	**1700**	150	400	2
26439 0	**80**	**3200**	185	490	2

Hammers with identical faces.

832-99 **Safety soft-face hammer, white/ white.**

Faces: White: Very hard, colourfast and wear-resistant polyamide (nylon®).
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Building and construction industries, foundry, mould making, road work, forestry and agriculture, gardening and landscaping.

Order-No.					
26644 8	**30**	**300**	87	290	5
26645 5	**40**	**640**	110	325	5
26646 2	**50**	**1100**	131	360	2
26647 9	**60**	**1700**	150	400	2
26648 6	**80**	**3000**	185	490	2

832-55 **Safety soft-face hammer, yellow/ yellow.**

Faces: Yellow: Medium hard, colourfast and wear-resistant polyurethane.
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Tool and machine construction, metal working, automobile repairs, panel beating, sheet metal and assembly work.

Order-No.					
26640 0	**30**	**300**	87	290	5
26641 7	**40**	**640**	110	325	5
26642 4	**50**	**1100**	131	360	2
26643 1	**60**	**1700**	150	400	2

Wiha Info

Explanation of the colour-code system

Material		Hammer face: Round face	Hammer face: Square face
Elastomer	**soft**	●	■
Rubber	**medium-soft**	●	
Polyurethane	**medium-hard**	●	■
Cellulose acetate	**hard**	●	
Polyamide	**very hard**	○	

Wiha Safety soft-face hammer.

Perfect safety in every detail.

Hammers with combined faces.

832-15 **Safety soft-face hammer, blue/ yellow.**

Faces: Blue: Soft, colourfast and wear-resistant elastomer.
Yellow: Medium hard, colourfast and wear-resistant polyurethane.
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Window construction, light metal construction, furniture and interior fittings industries, light assembly, tradeshow construction. Tool and machine construction, metal working, automobile repairs, panel beating, sheet metal and assembly work.

Order-No.					
26653 0	30	300	87	290	5
26654 7	40	640	110	325	5
26655 4	50	1100	131	360	2
26656 1	60	1700	150	400	2

Hammers with combined faces.

832-13 **Safety soft-face hammer, blue/ black.**

Faces: Blue: Soft, colourfast and wear-resistant elastomer.
Black: Medium soft, wear-resistant caoutchouc (rubber).
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Window construction, light metal construction, furniture and interior fittings industries, light assembly, tradeshow construction. Tile laying, paving, curbstone setting, dry wall construction, light gardening and landscaping setting tasks.

Order-No.					
26649 3	30	300	87	290	5
26650 9	40	640	110	325	5
26651 6	50	1100	131	360	2
26652 3	60	1700	150	400	2

834-15 **Safety soft-face hammer, blue/ yellow, square face.**

Faces: Blue: Soft, colourfast and wear-resistant elastomer.
Yellow: Medium hard, colourfast and wear-resistant polyurethane.
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Window construction, light metal construction, furniture and interior fittings industries, light assembly, tradeshow construction. Tool and machine construction, metal working, automobile repairs, panel beating, sheet metal and assembly work.
Extra: Square face can be turned by 90° for optimum working on edges and borders.

Order-No.					
26662 2	40	650	110	325	5

832-35 **Safety soft-face hammer, black/ yellow.**

Faces: Black: Medium soft, wear-resistant caoutchouc (rubber).
Yellow: Medium hard, colourfast and wear-resistant polyurethane.
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Tile laying, paving, curbstone setting, dry wall construction, light gardening and landscaping setting tasks.
Tool and machine construction, metal working, automobile repairs, panel beating, sheet metal and assembly work.

Order-No.					
26434 5	30	300	87	290	5
26435 2	40	640	110	325	5
26436 9	50	1100	131	360	2
26437 6	60	1700	150	400	2

Hammers with combined faces.

832-38 **Safety soft-face hammer, black/ transparent orange.**

Faces: Black: Medium soft, wear-resistant caoutchouc (rubber).
Transparent orange: Hard, colourfast and wear-resistant cellulose acetate.
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Tile laying, paving, curbstone setting, dry wall construction, light gardening and landscaping setting tasks.
Assembly and disassembly, sheet metal work, building and construction work, workshop tasks.

Order-No.					
26611 0	30	300	87	290	5
26612 7	40	640	110	325	5
26613 4	50	1100	131	360	2
26614 1	60	1700	150	400	2

Sledge hammers.

832-99 **Safety sledge hammer, white/ white.**

Faces: White: Very hard, colourfast and wear-resistant polyamide (nylon®).
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Building and construction industries, foundry, mould making, road work, forestry and agriculture, gardening and landscaping.

Order-No.					
26674 5	80L	3450	185	840	2

832-39 **Safety soft-face hammer, black/ white.**

Faces: Black: Medium soft, wear-resistant caoutchouc (rubber).
White: Very hard, colourfast and wear-resistant polyamide (nylon®).
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Tile laying, paving, curbstone setting, dry wall construction, light gardening and landscaping setting tasks.
Building and construction industries, foundry, mould making, road work, forestry and agriculture, gardening and landscaping.

Order-No.					
26657 8	30	300	87	290	5
26658 5	40	640	110	325	5
26659 2	50	1100	131	360	2
26660 8	60	1700	150	400	2
26582 3	80	3000	185	490	2

832-39 **Safety sledge hammer, black/ white.**

Faces: Black: Medium soft, wear-resistant caoutchouc (rubber).
White: Very hard, colourfast and wear-resistant polyamide (nylon®).
Housing: Powder coated safety shells made from malleable cast iron with grooves to clamp faces and handle in place.
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Application: Stone laying, paving, curbstone setting, gardening and landscape setting tasks.
Building and construction industries, foundry, mould making, road work, forestry and agriculture, gardening and landscaping.

Order-No.					
26661 5	80L	3450	185	840	2

Wiha Safety soft-face hammer.

Perfect safety in every detail.

Substitute faces.

831-1 **Hammer face, blue, for Safety soft-face hammer.**
Material: Soft elastomer, colourfast and wear-resistant.
Application: Window construction, light metal construction, furniture and interior fittings industries, light assembly, tradeshow construction.

Order-No.	●		
26663 9	30	17	5
26664 6	40	39	5
26665 3	50	85	2
26666 0	60	135	2

833-1 **Square hammer face, blue, for Safety soft-face hammer.**
Material: Soft elastomer, colourfast and wear-resistant.
Application: Window construction, light metal construction, furniture and interior fittings industries, light assembly, tradeshow construction.
Extra: Square face can be turned by 90° for optimum working on edges and borders.

Order-No.	■		
26673 8	40	47	5

831-3 **Hammer face, black for Safety soft-face hammer.**
Material: Medium soft caoutchouc (rubber), wear-resistant.
Application: Tile laying, paving, curbstone setting, dry wall construction, light gardening and landscaping setting tasks.

Order-No.	●		
26422 2	30	27	5
26423 9	40	62	5
26424 6	50	111	2
26425 3	60	192	2
26426 0	80	410	also for sledge hammers 2

Substitute faces.

831-5 **Hammer face, yellow, for Safety soft-face hammer.**
Material: Medium hard polyurethane, colourfast and wear-resistant.
Application: Tool and machine construction, metal working, automobile repairs, panel beating, sheet metal and assembly work.

Order-No.	●		
26427 7	30	27	5
26428 4	40	57	5
26429 1	50	116	2
26430 7	60	190	2

833-5 **Square hammer face, yellow for Safety soft-face hammer.**
Material: Medium hard polyurethane, colourfast and wear-resistant.
Application: Tool and machine construction, metal working, automobile repairs, panel beating, sheet metal and assembly work.
Extra: Square face can be turned by 90° for optimum working on edges and borders.

Order-No.	■		
26438 3	40	65	5

831-8 **Hammer face, transparent orange, for Safety soft-face hammer.**
Material: Hard cellulose acetate, colourfast and wear-resistant.
Application: Assembly and disassembly, sheet metal work, building and construction work, workshop tasks.

Order-No.	●		
26615 8	30	27	5
26616 5	40	57	5
26618 9	50	118	2
26620 2	60	195	2

831-9 **Hammer face, white, for Safety soft-face hammer.**
Material: Very hard polyamide (Nylon®), colourfast and wear-resistant.
Application: Building and construction industries, foundry, mould making, road work, forestry and agriculture, gardening and landscaping.

Order-No.	●		
26510 6	30	24	5
26511 3	40	56	5
26512 0	50	110	2
26513 7	60	187	2
26514 4	80	400	also for sledge hammers 2

Wiha Info

Wiha square hammer heads offer **a 27% greater striking surface** than round hammer heads with the same diameter.

They are thus particularly suitable for working on corners and edges.

Substitute housing and substitute handles.

829-0 **Housing set for Safety soft-face hammer.**
Material: Powder-coated malleable cast-iron shells, 2 pieces, with screw and counternut.
Properties: Elastic malleable cast iron, crack resistant.

Order-No.	●			
26668 4	30	170		1
26669 1	40	390		1
26670 7	50	670		1
26671 4	60	1040		1
26672 1	80	1900	also for sledge hammers	1

830-0 **Hickory handle for Safety soft-face hammer.**
Material: Carefully selected hickory with non-slip surface.
Properties: Over the years, hickory, an extremely hard wood, has proven to be the best material for hammer handles.

Order-No.	●				
26417 8	30	260	90		5
26418 5	40	280	130		5
26419 2	50	310	190		2
26420 8	60	340	250		2
26421 5	80	400	310		2
26667 7	80L	800	650	for sledgehammer	1

Hammer set.

832 B8 **Safety hammer set, 8 pcs.**
Shaft: Hickory handle with ergonomic profile and non-slip surface.
Standards: GS-mark: Tested safety.
Design: Hammer size 40 with 6 exchangeable hammer heads in metal case, incl. hex keys for simple exchange.
Content: 832-38 Safety soft-face hammer orange/black
831-1 soft hammer face, blue
831-3 medium soft hammer face, black
831-5 medium hard hammer face, yellow
831-9 very hard hammer face, white
833-1 soft square hammer face, blue
833-5 medium hard square hammer face, yellow
352 size 6 hex L-key, long made of chrome-vanadium steel, through hardened, nickel-plated.
Application: Practical set with different faces for every application.

Order-No.	Series	
28050 5	832 B8	1

Wiha Info

Explanation of the colour-code system

Material		Hammer face: Round face	Hammer face: Square face
Elastomer	**soft**	●	■
Rubber	**medium-soft**	●	
Polyurethane	**medium-hard**	●	■
Cellulose acetate	**hard**	●	
Polyamide	**very hard**	○	

Wiha Info

When replacing heads or handles, please note the following torques:

size 30 = 20 Nm
size 40 = 40 Nm
size 50 = 70 Nm
size 60 = 70 Nm
size 80 = 80 Nm

Wiha dead-blow hammer.

A star in the world of recoilless tools.

Wiha has now put an end to the familiar problems associated with the stress on joints and muscles when working with recoiling hammers. The Wiha dead-blow hammer has a special filling in the hammer casing to prevent recoil. Professionals who use these hammers on a continuous basis, for example, in tool and die shops or in body maintenance and sheet-metal work, appreciate the benefits of this recoilless hammer from Wiha.

The face is made of medium-hard polyurethane for full blows and protects delicate surfaces and edges.



The special metal filling in the hammer casing enables recoilless working.

Simple exchange of worn hammer faces:
1. Grip the hammer in the vice, lift to remove old hammer face.
2. Press the new hammer face into the handle until it locks into position.

Wiha dead-blow hammer.

- Recoilless working due to special metal filling in the hammer casing
- The hammer weight is increased by about 25% for additional power
- Easy on delicate surfaces and edges as a result of its comfort cushing surface
- Available with hickory wood handle or steel tube shaft
- Faces and wooden handles available as spare parts

Wear safety glasses and protective gloves when working with soft head hammers.

In addition, observe the national standards and regulations.

Hammers.

800 **Dead-blow hammer with hickory handle.**

Faces: Both yellow: Medium hard, colourfast and wear-resistant polyurethane.
Housing: Manufactured from precision steel tubing with welded on shaft, powder coated.
Shaft: Hickory handle coated with ergonomic profile and high quality surface.
Standards: GS-mark: Tested safety.
Application: Controlled strikes e.g. on workpieces being held by vices or assembly work.
Extra: With cast iron balls inside the hammer head for recoilless work.

Order-No.					
02092 7	25	320	108	320	5
02093 4	30	460	115	350	5
02094 1	35	580	118	355	5
02095 8	40	760	125	375	5
02096 5	45	1000	130	380	2
02097 2	50	1250	135	385	2
02098 9	60	2000	165	420	2
02099 6	70	2600	165	430	2

802 **Dead-blow hammer with steel tube shaft.**

Faces: Both yellow: Medium hard, colourfast and wear-resistant polyurethane.
Housing: Manufactured from precision steel tubing, powder coated.
Shaft: Welded, powder coated steel tube with ergonomic rubber handle.
Standards: GS-mark: Tested safety.
Application: Controlled strikes e.g. on workpieces being held by vices or assembly work.
Extra: With cast iron balls inside the hammer head for recoilless work.

Order-No.					
02122 1	25	520	108	288	5
02123 8	30	600	115	290	5
02124 5	35	700	118	300	5
02125 2	40	850	125	305	5
02126 9	45	1060	130	310	2
02127 6	50	1400	135	365	2
02128 3	60	2050	165	375	2
02129 0	70	2750	165	385	2

Sledgehammers. Spare parts.

800 **Dead-blow sledge hammer with hickory handle.**

Faces: Both yellow: Medium hard, colourfast and wear-resistant polyurethane.
Housing: Manufactured from precision steel tubing with welded on shaft, powder coated.
Shaft: Hickory handle coated with ergonomic profile and high quality surface.
Standards: GS-mark: Tested safety.
Application: Controlled positioning strikes in assembly and disassembly, straightening.
Extra: With cast iron balls inside the hammer head for recoilless work.

Order-No.					
02101 6	80	4550	205	880	1
02091 0	100	6860	210	1000	1

800S **Hickory handle for dead-blow hammer.**

Material: Carefully selected hickory with high quality surface.
Properties: Over the years, hickory, an extremely hard wood, has proven to be the best material for hammer handles.

Order-No.					
02113 9	25	295	69		10
02114 6	30/35	320	113		10
02115 3	40/45	335	123		10
02116 0	50	335	133		10
02117 7	60/70	360	165		5
28051 2	80	800	550	VPA GS-mark	1
28052 9	100	900	860	VPA GS-mark	1

800K **Hammer face, yellow for dead-blow hammer.**

Material: Medium hard polyurethane, colourfast and wear-resistant.

Order-No.			
02103 0	25	16	10
02104 7	30	22	10
02105 4	35	30	10
02106 1	40	45	10
02107 8	45	63	5
02108 5	50	86	5
02109 2	60	130	5
02110 8	70	178	5
02111 5	80	250	2
02102 3	100	449	2

Wiha measurement tools/articulated hose systems.

Wiha makes it possible: Measure and cooling with Swiss precision.

Measurement tools range

Wiha fibre-glass-reinforced folding rulers.
2 m of perfection. 216

Longlife All in One, Longlife Plus and Longlife. 217

Wiha fibre-glass-reinforced callipers.
Precision made in Switzerland. 218

digiMax, caliMax, dialMax and dialMax ESD. 219

Wiha advertising articles.
Your name on every measurement tool. 220

Articulated hose range

Wiha articulated hose system.
The universal pipe system. 221

maxiflex system ø ¼" 222

maxiflex system ø ½" 223

Wiha ESD callipers.
Wiha dialMax ESD page 219 + 290
See also the ESD tool range, page 260 – 291

Wiha fibre-glass-reinforced folding rulers.

2 m of perfection.

Often emulated but never surpassed – the Longlife Plus folding metre rule: has a long service life and is accurate and easy to use.

The world's first folding ruler made of high-quality fibre-glass material was developed and manufactured in 1968 and, since then, has been successfully marketed under the "Longlife" name.

Its characteristic joint with perfect long-life characteristics is still unique.

The Polyamide reinforced with 30% fibre-glass makes the Longlife ruler water resistant and scratch and score-proof.

Compared to wooden folding rulers a substantially higher service life is attained.

A deep embossed, precise scale on each segment contributes to the excellent performance characteristics.



Joints

Metal ends



Backwards running scale

Angle gauge

Wiha fibre-glass-reinforced folding rulers.

Permanent – Longlife
- no swelling from contact with water!
- distinctly longer service life compared to wooden folding ruler
- resistant to chemicals, washable

Longlife Plus
- red joint bodies for improved legibility
- wear-resistant metal ends
- backwards running scale

Longlife All in One
- angle measurement function
- depth measurement function

Exact
- CE conformity and Swiss precision for all rulers

Longlife All in One and Longlife Plus. Displays.

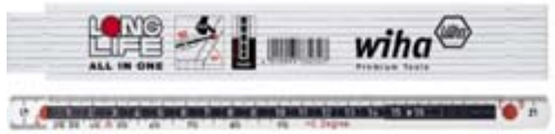

410 2007 **Longlife All in One folding ruler, 2 m metric, 10 segments.**

Material: Glass fibre reinforced polyamide. Scratch, weather and chemical resistant.
Joints: Play free, wear resistant and maintenance free joint with steel spring pin for constant tension. Usefull 90° snap-in position.
Scale: Deep embossed black scale in 1 mm increments. Every 10 cm is marked in red.
Accuracy: CE conformity, EU standard accuracy class III.
Extra: Readable from both sides through a second, backwards running scale (Recto Verso). Depth measurement with push-out depth gauge. Angle measurement with anchoring of depth gauge in fixation hole.

Order-No.				
33232 7	**15**	**135**	white	10

410 2001 **Longlife Plus folding metre rule, 2 m, metric, 10 segments. With metal ends.**

Material: Glass fibre reinforced polyamide. Scratch, weather and chemical resistant.
Joints: Play free, wear resistant and maintenance free joint with steel spring pin for constant tension. Usefull 90° snap-in position.
Scale: Deep embossed black scale in 1 mm increments. Every 10 cm is marked in red.
Accuracy: CE conformity, EU standard accuracy class III.
Extra: Wear resistant metal ends on the first and last segments. Readable from both sides through a second, backwards running scale (Recto Verso).

Order-No.				
27055 1	**15**	**140**	yellow	10
27059 9	**15**	**140**	white	10
27060 5	**15**	**140**	yellow/white	10

NEW

410 … VH **Sales counter display for Longlife folding rulers. Card display with 20 pcs. (2 m) or 54 pcs. (1 m).**

Order-No.	Art.-No.	Content		
33660 8	410 2007 **2** VH	**20 x 41020072**	Longlife All in One, 2 m	1
33945 6	410 2001 **1** VH	**20 x 41020011**	Longlife Plus, 2 m, yellow	1
34495 5	410 2000 **2** VH	**20 x 41020002**	Longlife, 2 m, white	1
33946 3	410 1000 **2** VH	**54 x 41010002**	Longlife, 1 m, white	1

Longlife.

410 2000 **Longlife folding metre rule, 2 m, metric, 10 segments.**

Material: Glass fibre reinforced polyamide. Scratch, weather and chemical resistant.
Joints: Play free, wear resistant and maintenance free joint with steel spring pin for constant tension. Usefull 90° snap-in position.
Scale: Deep embossed black scale in 1 mm increments. Every 10 cm is marked in red.
Accuracy: CE conformity, EU standard accuracy class III.

Order-No.				
27058 2	**15**	**140**	yellow	10
27057 5	**15**	**140**	white	10

410 1000 **Longlife folding metre rule, 1 m, metric, 10 segments.**

Material: Glass fibre reinforced polyamide. Scratch, weather and chemical resistant.
Joints: Play free, wear resistant and maintenance free joint with steel spring pin for constant tension. Usefull 90° snap-in position.
Scale: Deep embossed black scale in 1 mm increments. Every 10 cm is marked in red.
Accuracy: CE conformity, EU standard accuracy class III.

Order-No.				
27061 2	**13**	**45**	yellow	10
27062 9	**13**	**45**	white	10

410 1010 **Longlife folding metre rule, 1 m, metric, 5 segments.**

Material: Glass fibre reinforced polyamide. Scratch, weather and chemical resistant.
Joints: Play free, wear resistant and maintenance free joint with steel spring pin for constant tension. Usefull 90° snap-in position.
Scale: Deep embossed black scale in 1 mm increments. Every 10 cm is marked in red.
Accuracy: CE conformity, EU standard accuracy class III.

Order-No.				
27063 6	**15**	**65**	yellow	20

Sale only in pack quantities!
Special scales available on request.

Wiha fibre-glass-reinforced callipers.

Precision made in Switzerland.



Play free motion of the sliding components components through precision design for precise measurement results:
1. Fixed position
2. Flexible spring component

The Wiha callipers from the "max" range are manufactured since 1965 with Swiss precision. Due to the unique advantages made available by the non-metal, high-tech material with 50% fibre-glass component, the callipers have found new applications where their advantages are distinct when compared to the more heavy metal designs.
They are particularly suitable for measuring high-quality and highly sensitive objects.
These measuring tools are also ideal for all metal, wood and plastic-processing applications, for field staff and service engineers.
Thanks to their antimagnetic properties, Wiha callipers prevent measuring surfaces from becoming soiled by metal filings, which could impair the accuracy of measurements. Since they are made of non-corrosive material, Wiha callipers can also be used in damp working environments.
With the Wiha dialMax ESD callipers, measuring at ESD workstations and in ESD protection zones is now possible for the first time.

The dialMax ESD calliper can be used for measuring delicate electronic components.

The measuring jaw of the fibre-glass reinforced calliper enables scratch-free measurement of even very delicate, shiny surfaces.

Wiha fibre-glass-reinforced callipers.

Permanent
– very rigid with 50% fibre-glass component

High tech material
– non-metallic
– non-corrosive
– non-magnetic
– minimum thermal conductivity
– electrically insulating
– resistant to chemicals
– temperature resistant measuring surfaces: temporarily to 180°, permanently at 100-120°

Versatile applications
– highly sensitive measurement objects
– electronic components
– sensitive surfaces
– model making and prototype production
– food industry
– ESD protective zones

Precise
– practical ratchet guarantees equally balanced clamping force of the measurement jaws

digiMax and caliMax.

411 170 1 **Digital calliper digiMax, reading 0.01 mm.**

Material:	Non-metallic high-tech material with 50% fibre-glass content.
Scale:	5-digit digital display with 7.5 mm numeral height for easy reading.
Reading:	0.01 mm as well as 0.0005 inch.
Packaging:	Plastic box with hanging attachment.
Standards:	CE compliant.
Application:	For outside, inside and depth measurements.
Extra:	Switches off automatically after 5 minutes of non-use.
	Zero setting possible in every position for quick comparison measurements.
	Battery with approx. 2-year service life included.

Order-No.				
29422 9	150	6	48	5

411 320 3 **Vernier calliper caliMax, reading 0.1 mm.**

Material:	Non-metallic high-tech material with 50% fibre-glass content.
Scale:	Vernier for millimetre and inch display.
Reading:	0.1 mm as well as 1/64 inch.
	Accuracy as per DIN 862.
Packaging:	Blister packed.
Application:	For outside, inside and depth measurements.
Extra:	Almost parallax-free reading of the measurement value.
	Neon green vernier scale in with strong contrast for optimal reading.

Order-No.				
27083 4	150	6	45	10

dialMax and dialMax ESD.

411 210 2 **Analog calliper dialMax, reading 0.1 mm.**

Material:	Non-metallic high-tech material with 50% fibre-glass content.
Scale:	Dial, diameter 35 mm.
Reading:	0.1 mm; 1 dial rotation represents 10 mm.
	Accuracy as per DIN 862.
Packaging:	Blister packed.
Application:	For outside, inside and depth measurements.
Extra:	Impact resistant dial can be recalibrated to zero.

Order-No.				
27082 7	150	6	45	5

Further ESD tools on page 260 – 291

411 210 8 **Dial calliper dialMax ESD, reading 0.1 mm.**

Material:	Calliper made of ESD-safe material.
	Non-metallic high-tech material with 60% fibre-glass content.
	Surface resistance 10^6 - 10^9 ohms.
Scale:	Dial, diameter 35 mm.
Reading:	0.1 mm; 1 dial rotation represents 10 mm.
	Accuracy as per DIN 862.
Packaging:	Blister packed.
Standards:	IEC 61340-5-1.
Application:	For all work with electrostatically endangered components.
	For outside, inside and depth measurements.
Extra:	Measurements in ESD protection zones and at ESD workstations.
	Impact resistant dial can be recalibrated to zero.

Order-No.				
31439 2	150	6	45	5

Wiha Info



Outside measuring



Inside measuring



Depth measuring

Wiha advertising articles.

Your name on every measurement tool.

Because of their excellent characteristics the Wiha measuring tools make perfect advertising products for you and your customers.
Do you place value on high quality advertising products with a long service life? Then the folding rulers of the Longlife series with their perfect long-life properties are the perfect solution. The water resistant and scratch and score-proof fibre-glass reinforced plastic makes the Longlife ruler the best advertising product for all applications, with a distinctly longer advertising duration than a wooden folding ruler.

Whether 2 m, 1 m, yellow or white, the Wiha folding rulers embellished with your imprint give you and your customers the ideal surface for long-term advertising effects. Advertise your imprint on the side surfaces of the folding rulers or on the measuring jaws of the Wiha callipers.

A limited advertising space is available for your design:

2 m folding metre rule with max. advertising space of 160 x 25 m



New: with digital printing (complete surface of side)!



1 m folding metre rule with max. advertising space of 75 x 17 mm

Calliper with max. advertising space A = 32 x 10 mm or B = 45 x 18 mm



Price on request.
Please specify your desired product, quantity and the number of colours to be printed.

Wiha advertising articles.

Permanent advertising – Longlife
– distinctly longer service life of Longlife rulers compared to wooden folding rulers because of water resistance

Versatile – your name on the ruler
– 2 m, 1 m, white, yellow, further colours on request

Versatile – your name on the callipers
– special colours on request

Top product
– Swiss precision with all folding rulers and callipers

Wiha articulated hose system.

The universal pipe system.

The Wiha maxiflex® universal articulatedhose system is dimensionally stable, individually adjustable and has a long service life.

Wiha maxiflex® is a universal articulated hose system with maximum flexibility.

The broad range of hose joints, nozzles, connections, junctions and stop valves supply perfect solutions for every cooling or lubrication task.

A high quality and indestructible plastic, extensive design knowledge and precise manufacturing of all components ensures that this articulated hose system can be adapted for each individual application in day-to-day practice. With tight fitting components, maxiflex® is dimensionally stable, meaning no altering under pressure or via machine vibrations.



Unrestricted flow design



Assembly pliers and separation wedge

Wiha articulated hose system.

Permanent
– high quality, indestructible, dimensionally stable plastic
– resistant to chemicals and solvents
– is not an electrical conductor

Universal use
– cooling and lubrication for sawing, drilling, milling, grinding and machining processes
– blowing out and drawing in of air
– conducting of solvents
– positioning of auxiliary aids (so-called third hands)

Flexible
– adapter solutions for other hose systems

Precise
– Swiss precision with articulated hose assortment

Wiha articulated hose system.

The universal pipe system.

maxiflex® ¼"

maxiflex® programme ø ¼" (6.35 mm).

Order-No.	Article-No.	
27085 8	412 2030	1
	Pack with 22 segments, assembled	
	Length: 280 mm	
27086 5	412 2060	1
	Pack with 80 segments, assembled	
	Length: 1000 mm	
27087 2	412 2220	1
	Pack with 4 cylindrical nozzles ø 1.6 mm	
27088 9	412 2240	1
	Pack with 4 cylindrical nozzles ø 3.2 mm	
27089 6	412 2260	1
	Pack with 4 cylindrical nozzles ø 5.6 mm	
27090 2	412 2280	1
	Pack with 2 flat nozzles, 7 holes (ø 1.5 mm)	
	24 mm wide	
27091 9	412 2330	1
	Pack with 2 flat nozzles	
	24 mm wide	
27092 6	412 2420	1
	Pack with 4 angular nozzles ø 1.6 mm	
27093 3	412 2440	1
	Pack with 4 angular nozzles ø 3.2 mm	
27094 0	412 2460	1
	Pack with 4 angular nozzles ø 5.6 mm	
27095 7	412 2480	1
	Pack with 2 multi-hole angular nozzles,	
	7 holes (ø 2 mm)	
27096 4	412 2640	1
	Pack with 4 adapters for LOC-LINE® Flexi	
	and ARIANA Cool-Line	
27097 1	412 2650	1
	Pack with 4 spherical double socket	
	segments	
27098 8	412 2660	1
	Pack with 4 double nipples	
27099 5	412 2710	1
	Pack with 4 threaded nipples R 1/8"	
27100 8	412 2720	1
	Pack with 4 threaded nipples R 1/4"	
27101 5	412 2740	1
	Pack with 2 Y-junctions	
27102 2	412 2770	1
	Pack with 2 regulating valves	
27103 9	412 2780	1
	Pack with 2 segment clips	
28006 2	412 2020	1
	6 short nozzles, assembled, with:	
	1 threaded nipple R 1/8"	
	1 segment	
	1 short cylindrical nozzle ø 2.5 mm	
29446 5	412 2760	1
	Ball valve with threaded outlet G 1/4"	

maxiflex® programme ø ¼" (6.35 mm).

Order-No.	Article-No.	
27084 1	412 2010	1
	maxiflex®-set, assembled	
	1 threaded nipple R 1/4"	
	22 segments	
	1 cylindrical nozzle ø 3.2 mm	
	Total length: 320 mm	
27108 4	412 2920	1
	Separation wedge	
27109 1	412 2930	1
	Assembly pliers	
27104 6	412 2810	1
	Set with magnetic foot and ball valve,	
	assembled	
	1 threaded nipple R 1/4"	
	22 segments	
	1 cylindrical nozzle ø 3.2 mm	
	Magnetic foot with hose nozzle ø 11 mm	
Extra:	Magnetic adhesion 80 N	
27105 3	412 2820	1
	Set with magnetic foot, assembled	
	2 threaded nipples R 1/4"	
	44 segments, length: 2 x 320 mm	
	2 cylindrical nozzles ø 3.2 mm	
	Magnetic foot with hose nozzle ø 11 mm	
Extra:	Magnetic adhesion 80 N	
27106 0	412 2830	1
	Set with magnetic foot and ball valve,	
	assembled	
	1 threaded nipple R 3/8" for hose diameter 1/2"	
	1 reduction of hose diameter from 1/2" to 1/4"	
	22 segments	
	1 cylindrical nozzle ø 3.2 mm	
	Magnetic foot with hose nozzle ø 11 mm	
Extra:	Magnetic adhesion 150 N	
27107 7	412 2850	1
	Distribution block with 3 ball valves	
	Ball valves with threaded outlets R 1/4"	
	Hose nozzle ø 11 mm	
Extra:	Magnetic adhesion 4 x 95 N	
30518 5	412 2000	1
	maxiflex® basic set	
	3 tubes à 280 mm	
	2 cylindrical nozzles ø 1.6 mm	
	3 cylindrical nozzles ø 3.2 mm	
	2 cylindrical nozzles ø 5.6 mm	
	1 flat nozzle 24 mm	
	1 flat nozzle 24 mm, 7 holes ø 1.5 mm	
	2 Y-junctions	
	1 spherical double socket segment	
	2 threaded nipples R 1/8"	
	3 threaded nipples R 1/4"	
	1 adapter for LOC-LINE®	
	1 assembly pliers	
	1 separation wedge	

maxiflex® ½"

maxiflex® programme ø ½" (12.7 mm).

Order-No.	Article-No.	
27111 4	412 4030	1
	Pack with 12 segments, assembled	
	Length: 265 mm	
27112 1	412 4060	1
	Pack with 48 segments, assembled	
	Length: 1000 mm	
27113 8	412 4130	1
	Pack with 4 jointed pipe segments	
	Length: 440 mm	
27114 5	412 4160	1
	Pack with 4 segment clamps incl. screws	
27115 2	412 4220	1
	Pack with 4 cylindrical nozzles ø 10 mm	
27116 9	412 4240	1
	Pack with 2 flat nozzles, 6 holes (ø 10 mm)	
	30 mm wide	
27117 6	412 4330	1
	Pack with 2 flat nozzles 30 mm wide	
27118 3	412 4360	1
	Pack with 2 flat nozzles 60 mm wide	
27119 0	412 4420	1
	Pack with 4 angular nozzles ø 7 mm	
27120 6	412 4440	1
	Pack with 4 angular nozzles ø 10 mm	
27121 3	412 4460	1
	Pack with 2 multi-hole angular nozzles,	
	8 holes (ø 3.5 mm)	
27122 0	412 4620	1
	Pack with 2 reducers,	
	1/2" to 1/4" system	
27123 7	412 4640	1
	Pack with 4 adapters for LOC-LINE® Flexi	
	and ARIANA Cool-Line	
27124 4	412 4650	1
	Pack with 4 spherical double socket	
	segments	
27125 1	412 4660	1
	Pack with 4 double nipples	
27126 8	412 4720	1
	Pack with 4 threaded nipples R 3/8"	
27127 5	412 4730	1
	Pack with 4 threaded nipples R 1/2"	
27128 2	412 4740	1
	Pack with 2 Y-junctions	
27129 9	412 4750	1
	Pack with 2 Y reducer junctions	
	1/2" to 1/4" system	
27130 5	412 4770	1
	Pack with 2 regulating valves	
27131 2	412 4780	1
	Pack with 2 segment clips	

maxiflex® programme ø ½" (12.7 mm).

Order-No.	Article-No.	
29447 2	412 4760	1
	Ball valve with	
	threaded outlet G 3/8"	
27110 7	412 4010	1
	maxiflex®-set, assembled	
	1 threaded nipple R 1/2"	
	12 segments	
	1 cylindrical nozzle ø 10 mm	
	Total length: 320 mm	
27134 3	412 4920	1
	Separation wedge	
27135 0	412 4930	1
	Assembly pliers	
27132 9	412 4820	1
	Set with magnetic foot and ball valve,	
	assembled	
	1 threaded nipple R 3/8"	
	12 segments	
	1 cylindrical nozzle ø 10 mm	
	Magnetic foot with hose nozzle ø 13 mm	
Extra:	Magnetic adhesion 150 N	
27133 6	412 4860	1
	Distribution block with 3 ball valves	
	Ball valve with threaded outlet R 3/8"	
Extra:	Magnetic adhesion 4 x 95 N	
30519 2	412 4000	1
	maxiflex® basic set	
	3 tubes à 265 mm	
	3 cylindrical nozzles ø 10 mm	
	1 flat nozzle 30 mm	
	1 flat nozzle 60 mm	
	1 flat nozzle 30 mm, 6 holes ø 3.3 mm	
	1 Y-junction	
	1 Y reducer junction	
	1 reduction of hose diameter from 1/2" to 1/4"	
	3 threaded nipples R 1/2"	
	2 threaded nipples R 3/8"	
	1 adapter for LOC-LINE®	
	1 assembly pliers	
	1 separation wedge	

Wiha Info

You currently use a different system?
No problem!

System	Information
LOC-LINE®	Compatible with help of maxiflex® adapter order no. 27096 (**¼"**) and 27123 (**½"**).
Snap-Loc®	Compatible on both sides (external and internal ball) without adapter.
ARIANA Cool-Line	Compatible with help of maxiflex® adapter order no. 27096 (**¼"**) and 27123 (**½"**).
LEGROM-VARIO-System®	Small version **¼"** is compatible with help of maxiflex adapter (order no. 27096) when using Varios outer ball and adapters inner ball.

Wiha VDE tools.

Wiha makes it possible: absolute safety when working with live parts.

	Drive										
	Slotted	Phillips PH	Pozidriv PZ	Xeno PH	Xeno PZ	TORX®	For internal hex screws	For hex nuts	For internal square screws		
SoftFinish® electric screwdriver	229, 232–233	229, 232–233	229, 232			230, 233	230	231, 233	230		
SoftFinish® electric slimFix	229, 232	229, 232	232								
VDE T-handle							232	232			
SoftFinish® electric slimVario	235	235			235						
SoftFinish® electric Xeno				237	237						
Classic electric screwdriver	238	238									
Voltage testers	239–240										
Magazine bit holder	241	241	241								
Torque VDE screwdrivers	243	243	243	243	243	243					

VDE assortment

Available from 1. June 2010

New design: available from May 2010

Wiha VDE tools.
For safety and quality. ..... 226 – 227

Wiha SoftFinish® electric.
The safe and comfortable insulated VDE screwdriver. ..... 228 – 233

Wiha SoftFinish® electric slimFix.
slimTECHNOLOGY: The innovation for VDE fastening tools. ..... 229 + 232

Wiha VDE T-handle.
Ideal for applying high torques. 231

Wiha SoftFinish® electric slimVario.
Maximum safety with minimal format. ..... 234 – 235

Wiha SoftFinish® electric Xeno.
For terminal screws. ..... 236 – 237

Wiha Classic electric.
The space-saving insulated VDE screwdriver. 238

Wiha single-pole voltage tester.
For both DIY and professional users. ..... 239 – 240

Wiha SoftFinish® as single-pole voltage tester.
Professional screwdriver with testing function. 239

Wiha magazine bit holder.
Eight screwdrivers in one. 241

Wiha Torque VDE screwdrivers.
Precise and high repeat accuracy. ..... 242 – 243

Wiha Inomic® VDE.
Completely relaxed. ..... 244 – 245

Wiha Professional electric.
Completely reliable. ..... 246 – 249

Wiha cable shears. 250

Wiha crimp tools. ..... 251 – 252

Wiha stripping pliers. 252

Wiha VDE application sets.
The right tool for any application. ..... 253 – 259

Wiha VDE tools.

For safety and quality.

What is VDE?

The VDE Testing and Certification Institute is a nationally and internationally accredited institution in the field of testing and certification of electrical engineering devices, components and systems. These electrical products are tested for safety, electromagnetic compatibility and other product properties.

Why Wiha VDE tools?

The focus is on absolute safety for the user when working in the area of life parts. Here Wiha VDE tools meet all requirements for working in systems with up to 1,000 V alternating current (AC) or 1,500 V direct current (DC). In various extremely strict quality tests of the insulation, and therefore of the user protection, the Wiha VDE tools demonstrate their particular classiness.

AC 1000V
IEC 60900:2004

AC 1000V

IEC 60900:2004

VDE-GS mark

Technical working equipment and consumable materials subject to the applicable device and product safety laws bear the VDE-GS mark. This stands for the safety of the product with respect to electrical, mechanical, thermal, toxicological, radiological and other dangers. In addition, tools with the VDE-GS mark conform to the VDE regulations or European or internationally harmonised standards, i.e. they confirm the compliance with the safety requirements of the respective guidelines.

Double triangle and voltage range

If insulated tools or aids are marked with the symbol of the double triangle and the assigned voltage or voltage range specification or the class, they are suitable for working on energised parts.

IEC 60900:2004

An international standard which, among other things, describes the design of insulated tools in detail. For example, the thickness of the protective insulation is specified. In addition, the standard defines individual tests (piece tests) as well as series and random sample tests for checking the electrical safety of the protective insulation.

Wiha VDE tools are subjected to extremely demanding safety test methods.

Safety test method according to IEC using the example of a pair of Wiha pliers



Voltage test (piece test)
Wiha VDE tools are tested individually. All tools with the special marking were tested with 10,000 VAC and are therefore approved for 1,000 VAC (and 1,500 VDC). That means: ten-fold safety.

Cold shock test
The tools are cooled down to -25 °C. The insulating material must retain its toughness in the process so that it does not break when subjected to impacts and jolts.

Testing the electrical insulating properties
The tools are stored in water for 24 hours. Then they are tested at 10,000 VAC for three minutes. Neither a sparkover nor a disruptive discharge through the insulation may occur.



Testing the adhesion of the insulating material coating
To test the adhesion of the insulating coating, the adhesion is tested with a tensile force of 500 N following storage for 168 hours at 70 °C. When doing so, the insulating material must continue to be firmly connected to the basic tool.



Pressure tests
At a pressure load of 20 N, a temperature of 70 °C and a test voltage of 5,000 VAC. No disruptive discharge may occur.

Testing the combustion behaviour
A flame is pointed at the tool for ten seconds. The insulating material may then not continue to burn, but instead must extinguish.

Wiha SoftFinish® electric.

The safe and comfortable insulated VDE screwdriver.

The right tool at a glance, thanks to the printed screw symbol on the handle end.

Applications on live equipment are subject to very special requirements. The focus is on absolute user safety and Wiha demonstrates this with a wealth of details.

The high quality blade insulation is moulded directly onto the blade and therefore guarantees safety when working on live equipment up to 1500 V DC or 1000 V AC.
To maintain this safety, each screwdriver of the SoftFinish® electric series is individually tested in a water bath at 10000 Volts according to IEC 60900:2004.

The roll-off protection and the special handle geometry offer optimum handling and electrical safety, even in critical applications.

slimTECHNOLOGY:
Up to 33% reduction of the blade diameter in the critical working area allows effortless access to low-lying fastening/ spring elements.

AC 1000V IEC 60900:2004

When working with VDE tools, observe the national safety and accident prevention regulations.

Wiha SoftFinish® electric.

- Safety when working with live equipment up to 1000 V AC and 1500 V DC
- Each screwdriver is individually tested in a water bath at 10.000 Volts according to IEC 60900:2004
- Awarded the GS symbol for tested safety
- Multi-component SoftFinish® handle provides maximum user comfort

Wiha SoftFinish® electric slimFix.

- Unlimited access
- Blades up to 33% narrower due to integrated insulation
- Actuating tool for spring clips (wedge-profiled output geometry)

For slotted, Phillips and Pozidriv screws.

AC 1000V IEC 60900:2004

NEW

3201 **SoftFinish® electric slimFix slotted screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Protective insulation spray-coated directly onto the blade and completely integrated into the blade in the lower area.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.
Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.

Order-No.						
35446 6	**3.5**	**100**	0.6	204	23	10
35390 2	**4.0**	**100**	0.8	211	30	10
35391 9	**5.5**	**125**	1.0	243	36	10
35392 6	**6.5**	**150**	1.2	268	36	10

AC 1000V IEC 60900:2004

NEW

3211 **SoftFinish® electric slimFix Phillips screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Protective insulation spray-coated directly onto the blade and completely integrated into the blade in the lower area.
Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2004.
Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.

Order-No.					
35393 3	**PH1**	**80**	191	30	10
35394 0	**PH2**	**100**	218	36	10

AC 1000V IEC 60900:2004

NEW

324 **SoftFinish® electric slimFix Pozidriv screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Protective insulation spray-coated directly onto the blade and completely integrated into the blade in the lower area.
Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2004.
Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.

Order-No.					
35395 7	**PZ1**	**80**	191	30	10
35396 4	**PZ2**	**100**	218	36	10

Products on this page are VDE-tested

For slotted, Phillips and Pozidriv screws.

AC 1000V IEC 60900:2004

320N **SoftFinish® electric slotted screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.						
00819 2	**2.0**	**60**	0.4	164	23	10
00820 8	**2.5**	**75**	0.4	179	23	10
00821 5	**3.0**	**100**	0.5	204	23	10
00822 2	**3.5**	**100**	0.6	204	23	10
00823 9	**4.0**	**100**	0.8	211	30	10
00824 6	**4.5•**	**125**	1.0	236	30	10
00825 3	**4.5•**	**175**	1.0	286	30	5
31863 5	**4.5•**	**200**	1.0	311	30	10
00826 0	**5.5**	**125**	1.0	243	36	10
00827 7	**5.5•**	**175**	1.0	293	36	5
00828 4	**6.0•**	**150**	1.2	268	36	10
00829 1	**6.5**	**150**	1.2	268	36	10
00830 7	**8.0**	**175**	1.2	299	41	10
00831 4	**8.0**	**175**	1.6	299	41	10
00832 1	**10.0**	**200**	1.6	324	41	10

• Additional dimension. Non-DIN size

AC 1000V IEC 60900:2004

321N **SoftFinish® electric Phillips screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2004.

Order-No.					
00846 8	**PH0**	**60**	164	23	10
00847 5	**PH1**	**80**	191	30	10
00848 2	**PH2**	**100**	218	36	10
00849 9	**PH3**	**150**	268	41	10
00850 5	**PH4**	**200**	318	41	5

AC 1000V IEC 60900:2004

324 **SoftFinish® electric Pozidriv screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2004.

Order-No.					
00877 2	**PZ0**	**60**	164	23	10
00878 9	**PZ1**	**80**	191	30	10
00879 6	**PZ2**	**100**	218	36	10
00880 2	**PZ3**	**150**	324	41	5

Wiha SoftFinish® electric.

The safe and comfortable insulated VDE screwdriver.

For Pozidriv screws.

AC 1000V IEC 60900:2004

325 **SoftFinish® electric TORX® screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.					
03760 4	T5	60	164	23	10
03761 1	T6	60	164	23	10
03762 8	T7	60	164	23	10
00881 9	T8	60	164	23	10
00882 6	T9	60	164	23	10
00883 3	T10	60	164	23	10
00884 0	T15	80	191	30	10
00885 7	T20	80	191	30	10
00886 4	T25	80	198	36	10
00887 1	T27	100	218	36	10
00888 8	T30	100	218	36	10
00889 5	T40	150	274	41	5
03763 5	T45	150	274	41	5

For Allen screws and internal square-drive screws.

AC 1000V IEC 60900:2004

323N **SoftFinish® electric hex screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For internal hex screws.

Order-No.					
30361 7	2.5	75	179	23	10
30362 4	3.0	75	179	23	10
30363 1	4.0	75	186	30	10
30364 8	5.0	75	186	30	10
30365 5	6.0	100	218	36	10
30366 2	8.0	100	218	36	10

AC 1000V IEC 60900:2004

358N **SoftFinish® electric square-drive (Robertson) screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For fastening and unfastening internal square-drive (Robertson) screws.

Order-No.						
32396 7	Robertson 1	2.3	100	211	30	10
32397 4	Robertson 2	2.8	150	268	36	10

Products on this page are VDE-tested

For hex nuts.

AC 1000V IEC 60900:2004

322 **SoftFinish® electric hex nut driver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Deep drawn socket.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: DIN 3125. Manufactured acc. to IEC 60900:2004.
Application: For external hex screws and hex nuts.

Order-No.						
00853 6	4	125	236	30	10.2	10
00855 0	5	125	236	30	11.2	10
00856 7	5.5	125	236	30	11.2	10
00857 4	6	125	236	30	12.2	10
00858 1	7	125	243	36	14.5	10
00859 8	8	125	243	36	15.2	10
00860 4	9	125	243	36	16.0	10
00861 1	10	125	243	36	17.2	10
00862 8	11	125	243	41	19.2	5
00863 5	12	125	243	41	20.2	5
00864 2	13	125	243	41	22.2	5
00865 9	14	125	243	41	23.2	5
00866 6	15	125	243	41	25.2	5
00867 3	16	125	243	41	25.2	5
00868 0	17	125	243	41	27.2	5

For hex nuts and hex socket screws.

AC 1000V IEC 60900:2004

334N **VDE T-handle hex screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: VDE-insulated T-handle.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For internal hex screws.

Order-No.						
27928 8	4	150	176	80	26	5
27929 5	5	150	182	100	32	5
27930 1	6	150	182	100	32	5
27931 8	8	150	182	100	32	5

AC 1000V IEC 60900:2004

336N **VDE T-handle hex nut driver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Deep drawn socket.
Handle: VDE-insulated T-handle.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For external hex screws and hex nuts.

Order-No.						
27932 5	8	200	232	100	32	5
27933 2	10	230	262	100	32	5
27934 9	13	230	262	100	32	5
27935 6	17	230	268	120	38	5

Products on this page are VDE-tested

Wiha SoftFinish® electric.

The safe and comfortable insulated VDE screwdriver.

Slotted/Phillips set.

AC 1000V IEC 60900:2004

NEW

3201 K6 **SoftFinish® electric slimFix slotted/ Phillips screwdriver set, 6 pcs. Insulation 1000 V AC, VDE-tested and with GS mark.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Protective insulation spray-coated directly onto the blade and completely integrated into the blade in the lower area.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.
Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.

Order-No.	Series					
35389 6	3201 K6					1
⦶	3201	3.5x100	4.0x100	5.5x125	6.5x150	
⊕	3211	PH1x80	PH2x100			

Slotted/Phillips and slotted/Pozidriv sets.

AC 1000V IEC 60900:2004

320N K6 **SoftFinish® electric slotted/ Phillips screwdriver set, 6 pcs. Insulation 1000 V AC, VDE-tested and with GS mark.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	Series					
00833 8	320N K6					1
⦶	320N	3.0x100	4.0x100	5.5x125	6.5x150	
⊕	321N	PH1x80	PH2x100			

AC 1000V IEC 60900:2004

320N ZK6 SO **SoftFinish® electric slotted/ Pozidriv screwdriver set, 6 pcs. Insulation 1000 V AC, VDE-tested and with GS mark.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	Series					
25477 3	320N ZK6 SO					1
⦶	320N	2.5x75	3.5x100	4.5x125	5.5x125	
⊕	324	PZ1x80	PZ2x100			

Products on this page are VDE-tested

Slotted/Phillips set.

AC 1000V IEC 60900:2004

320N K7 **SoftFinish® electric slotted/ Phillips screwdriver set, 7 pcs. Insulation 1000 V AC, VDE-tested and with GS mark.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	Series					
00834 5	320N K7					1
⦶	320N	2.5x75	4.0x100	5.5x125	6.5x150	
⊕	321N	PH1x80	PH2x100			
⦶	255-11	3.0x65				

TORX® and nut driver set.

AC 1000V IEC 60900:2004

325N K6 01 **SoftFinish® electric TORX® screwdriver set, 6 pcs. Insulation 1000 V AC, VDE-tested and with GS mark.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	Series					
29465 6	325N K6 01					1
✱	325	T8x60	T9x60	T10x60		
		T15x80	T20x80	T25x80		

AC 1000V IEC 60900:2004

322 K5 **SoftFinish® electric hex nut driver set, 5 pcs. Insulation 1000 V AC, VDE-tested and with GS mark.**

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Deep drawn socket.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	Series					
29466 3	322 K5					1
○	322	5.5x125	7x125	8x125		
		10x125	13x125			

Products on this page are VDE-tested

Wiha SoftFinish® electric slimVario.

Maximum safety with minimal format.

The perfect combination of functional bits, handy holders and maximum safety standards! The new Wiha VDE exchange bits and the SoftFinish® hand-held screwdrivers were especially developed for mobile applications at various locations, e.g. building sites, solar systems or external switch cabinets. Perfect for the job with its light weight and compact geometry.

It slim design and especially the protective insulation integrated into the bit means highly diverse applications. It can be used both as a mechanical and electrical fastening tool. The bit holder manufactured from metal parts gives the tool a long service life and an unusual level of ruggedness for everyday use.

Added to that is an assortment of commonly used exchange bits and the pleasant SoftFinish® handle.

For all those unwilling to compromise in terms of safety and comfort.

slimTECHNOLOGY:
Up to 33% reduction of the blade diameter in the critical working area allows effortless access to low-lying fastening/ spring elements.

AC 1000V IEC 60900:2004

For work in the area of live parts up to 1,000 V AC! 6 mm VDE exchange bits should be used only with the hand-held screwdriver supplied!

When working with VDE tools, observe the national safety and accident prevention regulations.

Wiha SoftFinish® electric slimVario.

- **Slim – light – mobile**
  Ideal for taking along
- **Durable**
  Wear-free bit holder due to manufacturing with metal parts
- **Gets everywhere**
  Even in small apertures and low-lying fastening and spring elements
- **A firm hold**
  Optimal interplay of bit and holder
- **Certified quality**
  GS mark for inspected safety, one-off testing in a water bath at 10,000 V according to IEC 60900:2004

SoftFinish® electric slimVario.

NEW **2831-00** — AC 1000V IEC 60900:2004

SoftFinish® electric slimVario bit holder with handle and ClicFix, 6.0 mm.

Blade: Chrome-vanadium steel, through-hardened. Insulation moulded directly onto blade.
Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.
Bit holder: ClicFix quick release holder securely locks bits. Only for 6 mm VDE exchange bits.
Application: Compact screwdriver together with VDE exchange bits.
Attention: Not for use with bit styles C 6.3 and E 6.3.

Order-No.					
34577 8	6	30	50	160	5

NEW **2831-10** — AC 1000V IEC 60900:2004

SoftFinish® electric slimVario exchange bit, slotted. Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: Manufactured acc. to IEC 60900:2004.
Material: High-quality chrome vanadium steel, through-hardened, bronzed. Protective insulation spray-coated directly onto the bit and completely integrated into the blade in the lower area from size 4.0.
Application: For all work on or around electrical components up to 1000 V AC.
Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated. The slim form of the bit allows easy reaching of the screws below the finger and hand guards.
Attention: 6 mm VDE exchange bits should only be used with the 2831-00 hand-held screwdriver.

Order-No.						
34578 5	2.5	90	0.4	6.0	no slim version	1
34579 2	3.0	90	0.5	6.0	no slim version	1
34580 8	4.0	90	0.8	6.0		1
34581 5	5.5	90	1.0	6.0		1
34582 2	6.5	90	1.2	6.0		1

NEW **2831-11** — AC 1000V IEC 60900:2004

SoftFinish® electric slimVario exchange bit, Phillips. Insulation 1000 V AC, VDE-tested and with GS mark.

Order-No.				
34583 9	PH1	90	6.0	1
34584 6	PH2	90	6.0	1

NEW **2831-14** — AC 1000V IEC 60900:2004

SoftFinish® electric slimVario exchange bit for terminal screws (slotted/ Pozidriv). Insulation 1000 V AC, VDE-tested and with GS mark.

Order-No.				
34589 1	SL/PZ1	90	6.0	1
34590 7	SL/PZ2	90	6.0	1

Sets.

NEW **2831 T701** — AC 1000V IEC 60900:2004

SoftFinish® electric slimVario exchange bit set, slotted/ Phillips, 7 pcs.

Bits: High-quality chrome vanadium steel, through-hardened, bronzed. Protective insulation spray-coated directly onto the bit and completely integrated into the blade in the lower area. Insulation 1000 V AC, VDE-tested and with GS mark.
Holder: Wiha SoftFinish® electric multi-component handle with roll-off protection. Compact screwdriver together with VDE exchange bits.
Application: For all work on or around electrical components up to 1000 V AC.
Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated. The slim form of the bit allows easy reaching of the screws below the finger and hand guards.

Order-No.	Series					
34733 8	2831 T701					1
	2831-10	1x3.0	1x4.0	1x5.5	1x6.5	
	2831-11	1xPH1	1xPH2			
	2831-00	SoftFinish® electric slimVario bit holder				

NEW **2831 T702** — AC 1000V IEC 60900:2004

SoftFinish® electric slimVario exchange bit set, slotted/ Phillips, 7 pcs.

Order-No.	Series					
34734 5	2831 T702					1
	2831-10	1x2.5	1x3.0	1x4.0	1x5.5	
	2831-11	1xPH1	1xPH2			
	2831-00	SoftFinish® electric slimVario bit holder				

NEW **2831 T703** — AC 1000V IEC 60900:2004

SoftFinish® electric slimVario exchange bit set, slotted/ Xeno (slotted/ Pozidriv) , 7 pcs.

Order-No.	Series					
34735 2	2831 T703					1
	2831-10	1x3.0	1x4.0	1x5.5	1x6.5	
	2831-14	1xSL/PZ1	1xSL/PZ2			
	2831-00	SoftFinish® electric slimVario bit holder				

Products on this page are VDE-tested

Wiha SoftFinish® electric Xeno.

For terminal screws.

Wiha's new insulated VDE screwdriver for terminal screws.

The SoftFinish® electric Xeno screwdriver is a special VDE screwdriver used to turn terminal screws.

Terminal screws are typically used in switch-cabinet systems and fuse boxes, terminal blocks and relays. They have a special combination profile and are available as slotted/Phillips or slotted/Pozidriv models.

The Wiha SoftFinish® electric Xeno is ideally suited for work on switch cabinet systems, fuse boxes, terminal strips and relays.

Wiha SoftFinish® electric Xeno.

- The special slotted/Phillips or slotted/Pozidriv profile of the Xeno is optimally suited for terminal screws
- The combination profile reduces slipping and ensures greater torque transfer

AC 1000V IEC 60900:2004

When working with VDE tools, observe the national safety and accident prevention regulations.

For terminal screws (slotted/ Phillips).

AC 1000V IEC 60900:2004

327 **SoftFinish® electric Xeno.**
For terminal screws (slotted/ Phillips).
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.
No slipping and better torque transfer with terminal screws
e.g. in switch-cabinets, fuse boxes and terminal blocks.

Order-No.					
30716 5	SL/PH1	80	191	30	10
30715 8	SL/PH2	100	218	36	10

For terminal screws (slotted/ Pozidriv).

AC 1000V IEC 60900:2004

328 **SoftFinish® electric Xeno.**
For terminal screws (slotted/ Pozidriv).
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.
No slipping and better torque transfer with terminal screws
e.g. in switch-cabinets, fuse boxes and terminal blocks.

Order-No.					
30700 4	SL/PZ1	80	191	30	10
30701 1	SL/PZ2	100	218	36	10

AC 1000V IEC 60900:2004

SB327 S2 **SoftFinish® electric Xeno screwdriver set, 2 pcs.**
For terminal screws (slotted/ Phillips).
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.
Extra: Blister packed.

Order-No.	Series		
32281 6	SB327 S2		1
	327	SL/PH1x80	SL/PH2x100

AC 1000V IEC 60900:2004

SB328 S2 **SoftFinish® electric Xeno screwdriver set, 2 pcs.**
For terminal screws (slotted/ Pozidriv).
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.
Extra: Blister packed.

Order-No.	Series		
32282 3	SB328 S2		1
	328	SL/PZ1x80	SL/PZ2x100

Products on this page are VDE-tested

Wiha Classic electric.

The space-saving insulated VDE screwdriver.

For slotted and Phillips screws.

AC 1000V IEC 60900:2004

320 **Classic electric slotted screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Chrome-vanadium steel, through hardened, black-finish. Insulation moulded directly onto blade.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.						
00782 9	1.6	40	0.4	115	19	10
00783 6	2.3	60	0.5	135	19	10
00784 3	2.5	75	0.4	150	19	10
00785 0	2.8	75	0.6	150	19	10
00786 7	3.0•	100	0.5	175	19	10
06568 3	3.0	150	0.5	225	19	10
00787 4	3.5	100	0.6	185	22	10
00788 1	3.5	100	0.8	185	22	10
00789 8	4.0	100	0.8	195	24	10
06569 0	4.0	150	0.8	245	24	10
00790 4	4.5	125	1.0	220	24	10
00791 1	4.5•	175	1.0	270	24	10
06570 6	5.0	100	1.0	195	24	10
06571 3	5.0	150	1.0	245	24	10
00792 8	5.5	125	1.0	230	28	10
00793 5	5.5•	175	1.0	280	28	10
06573 7	6.0	100	1.2	205	28	10
00794 2	6.0	150	1.2	255	28	10
00795 9	6.5	150	1.2	255	28	10
00796 6	8.0	175	1.2	290	32	10
00797 3	10.0	200	1.6	325	36	10

• Additional dimension. Non-DIN size

AC 1000V IEC 60900:2004

321 **Classic electric Phillips screwdriver.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Chrome-vanadium steel, through hardened, black-finish. Insulation moulded directly onto blade.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.					
00836 9	PH0	60	135	19	10
00837 6	PH1	80	175	24	10
00838 3	PH2	100	205	28	10
00839 0	PH3	150	265	32	10
00840 6	PH4	200	325	36	10

VDE slotted/Phillips sets.

AC 1000V IEC 60900:2004

320 K6 **Classic electric slotted/ Phillips screwdriver set, 6 pcs.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Chrome-vanadium steel, through hardened, black-finish. Insulation moulded directly onto blade.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	Series				
00815 4	320 K6				1
	320	2.8x75	4.0x100	5.5x125	6.5x150
	321	PH1x80	PH2x100		

with voltage tester

AC 1000V IEC 60900:2004

320 P7 SO **Classic electric slotted/ Phillips screwdriver set, 7 pcs.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Blade: Chrome-vanadium steel, through hardened, black-finish. Insulation moulded directly onto blade.
Handle: Impact, oil and grease resistant Wiha Classic handle.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	Series				
07151 6	320 P7 SO				1
	320	2.8x75	4.0x100	5.5x125	6.5x150
	321	PH1x80	PH2x100		
	255-3	3.0x65			

Products on this page are VDE-tested

Wiha single-pole voltage tester.

For both DIY and professional users.

Single-pole voltage tester.

AC 1000V IEC 60900:2004

NEW

255-11 **Single-pole SoftFinish® voltage tester, 110-250 volts.**
In accordance with DIN 57860/6 and DIN VDE 0680-6, GS tested.

Blade: High-quality chrome-vanadium molybdenum steel, through-hardened, nickel-coated. Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® handle of transparent, impact resistant plastic. Metal contact plate and robust clip.
Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2004.
Application: For determining alternating voltages in low voltage range up to 250 V with respect to earth potential. Suitable for trade and industry professionals and handymen.
Extra: Tried-and-proven Wiha SoftFinish® screwdriver with additional testing function.

Order-No.							
35414 5	3.0	65	0.5	145	19	in pouch	10
34745 1	3.0	65	0.5	145	19	single	10

Single-pole voltage tester.

AC 1000V IEC 60900:2004

255-1 **Single-pole voltage tester, 220-250 volts.**
Acc. to DIN VDE 0680-6, GS-mark.

Blade: Slotted blade, 55 mm long.
Handle: Transparent with clip.
Application: For both DIY and professional users.

Order-No.						
00451 4	3.0	55	130	14	in pouch	10
05269 0	3.0	55	130	14	single	10

AC 1000V IEC 60900:2004

SB 255-1 **Single-pole voltage tester 220-250 Volt in blister pack.**
Acc. to DIN VDE 0680-6, GS-mark.

Order-No.					
32200 7	3.0	60	130	14	1

AC 1000V IEC 60900:2004

255-2 **Single-pole voltage tester, 220-250 volts.**
Acc. to DIN VDE 0680-6, GS-mark.

Blade: Slotted blade, 107 mm long.
Handle: Transparent.
Application: For both DIY and professional users.

Order-No.						
00453 8	3.5	107	200	18	in pouch	10
05270 6	3.5	107	200	18	single	10

Wiha Info

NEW

Wiha SoftFinish® as single-pole voltage tester.

- High quality, hardened chrome-vanadium molybdenum blade for perfect fastening
- Quality screwdriver in Wiha SoftFinish® design with testing function
- Voltage testing function with respect to earth potential from 110 to 250 V: worldwide use possible
- Tough spring clip of non-rusting stainless steel
- Solid brass earthing contact
- VDE and GS tested

Products on this page are VDE-tested

Wiha single-pole voltage tester.

For both DIY and professional users.

Single-pole voltage tester.

AC 1000V IEC 60900:2004

255-3 Single-pole voltage tester, 220-250 volts.
Acc. to DIN VDE 0680-6, GS-mark.

Blade: Slotted blade, 65 mm long.
Handle: Transparent with clip.
Application: For both DIY and professional users.

Order-No.						
00454 5	3.0	65	140	15	in pouch	10
05271 3	3.0	65	140	15	single	10

AC 1000V IEC 60900:2004

SB 255-3 Single-pole voltage tester 220-250 volts in blister pack.
Acc. to DIN VDE 0680-6, GS-mark.

Order-No.					
32201 4	3.0	65	140	15	1

AC 1000V IEC 60900:2004

255-3 VB Single-pole voltage tester 220-250 volts, 60 pcs.
In display box.

Order-No.	
32385 1	1

AC 1000V IEC 60900:2004

255-4 Single-pole voltage tester, 100-500 volts.

Blade: Slotted blade, 107 mm long.
Handle: Transparent.
Application: For both DIY and professional users.

Order-No.						
27863 2	4.0	107	200	18	in pouch	10
27862 5	4.0	107	200	18	single	10

Single-pole voltage tester/automotive circuit tester.

AC 1000V IEC 60900:2004

255-7 Single-pole voltage tester, 220-250 volts.
Acc. to DIN VDE 0680-6, GS-mark.

Blade: Slotted blade, 70 mm long.
Handle: Black with clip.
Application: For both DIY and professional users.

Order-No.						
00456 9	3.0	70	165	17	single	10

AC 1000V IEC 60900:2004

SB 255-7 Single-pole voltage tester 220-250 volts in blister pack.
Acc. to DIN VDE 0680-6, GS-mark.

Order-No.					
31771 3	3.0	70	165	17	1

AC 1000V IEC 60900:2004

255-8 Single-pole voltage tester, 220-250 volts.
Acc. to DIN VDE 0680-6, GS-mark.

Blade: Slotted blade, 100 mm long.
Handle: Black.
Application: For both DIY and professional users.

Order-No.						
00457 6	3.5	100	185	19	single	10

AC 1000V IEC 60900:2004

SB 255-8 Single-pole voltage tester 220-250 volts in blister pack.
Acc. to DIN VDE 0680-6, GS-mark.

Order-No.					
32202 1	3.5	100	185	19	1

258-4 Automotive circuit tester 6-24 volts.
With alligator clip, probe tip with protective cap.

Application: Ideal for automotive circuit testing.
Extra: Storage pouch supplied.

Order-No.			
00468 2	120	24 volts	10
00472 9		Replacement bulb 24 V	10

Wiha magazine bit holder.

Eight screwdrivers in one.

reddot design award
best of the best 2008

"Eight screwdrivers in one" is how the Wiha magazine bit holder might best be described. The bit magazine accommodated by the handle is swung open with a light press of the thumb. The bits can then be quickly and simply changed. Thanks to this new solution for storing and exctracting bits, the user always has a clear idea of where things are.

Wiha magazine bit holder.

- Innovative bit removal function
- Extremely handy & compact
- Suitable for all current connection types

Magazine bit holder 1/4", magnetic.

38090201 Magazine bit holder, magnetic, 1/4".

Blade: High grade chrome-vanadium steel, through hardened.
Casing spray-coated directly onto the blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: DIN 3126, ISO 1173, style D 6.3.
Bits: 25 mm Standard bits.
Application: The alternative to a screwdriver set.
Eight drive shapes in one screwdriver.

Order-No.	Series				
33005 7	38090201				5
	7010 Z	4.5x25	6.5x25		
	7011 Z	PH1x25	PH2x25	PH3x25	
	7012 Z	PZ1x25	PZ2x25	PZ3x25	

Blister packed. Display.

SB 38090201 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33006 4	SB 38090201				5
	7010 Z	4.5x25	6.5x25		
	7011 Z	PH1x25	PH2x25	PH3x25	
	7012 Z	PZ1x25	PZ2x25	PZ3x25	

38090201 VH Magazine bit holder, display, 10 pcs.
Sales display made of card with integrated rear panel.

Order-No.	Content	
33248 8	10 x 38090201	1

Products on this page are **not** VDE-tested

Wiha Torque VDE screwdrivers.

Precise and high repeat accuracy.

Wiha TorqueVario®-S VDE with integrated scale.

For controlled tightening of the screw while providing user safety for electrical applications we offer the TorqueVario®-S VDE with an integrated window scale in combination with Wiha Torque VDE interchangeable blades. All VDE handles and blades are individually tested and provide safety up to 1000 V AC/ 1500 V DC. The Torque Vario®-S VDE series has three models covering torque ranges from 0.6 Nm up to 8.0 Nm.

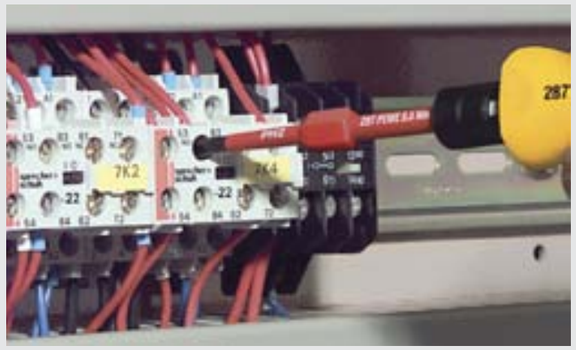



slimTECHNOLOGY:
Up to 33% reduction of the blade diameter in the critical working area allows effortless access to low-lying fastening/ spring elements.

AC 1000V
IEC 60900:2004

When working with VDE tools, observe the national safety and accident prevention regulations.

Wiha Torque VDE screwdrivers.

- Clearly audible and perceptible click on attaining the pre-set torque
- Torque accuracy ± 6% of the pre-set scale value
- Delivered with factory calibration certificate
- Each tool is individually tested and marked with an identification number
- Safety when working with live equipment up to 1000 V AC and 1500 V DC
- Each screwdriver is individually tested in a water bath at 10.000 Volts according to IEC 60900:2004
- Compact and particularly low weight design
- Ergonomic handle sizes that are proportional to the torque ranges
- Fulfills all accuracy requirements as defined by EN ISO 6789, BS EN 26789 and ASME B 107.14M

TorqueVario®-S VDE. Torque VDE interchangeable blades.

2872 **TorqueVario®-S VDE torque screwdriver.**
Insulation up to 1000 V AC, GS-mark.
Torque value can be set via window scale.
Automatic release.

Handle: Torque infinitely adjustable with Torque-Setter setting tool (also supplied).
Ergonomic multi-component handle, insulation up to 1000 V AC, GS mark.
Handle sizes proportioned to optimise torque setting.
Audible and perceptible click when the pre-set torque has been attained.
Standards: Manufactured acc. to IEC 60900:2004.
EN ISO 6798, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards.
Application: For electrical applications up to 1000 V AC where recommended torque settings are important.
Use in combination with a Wiha torque VDE interchangeable blade.
Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order-No.	Nm				
26625 7	0.6-2.0	3.8	131	30	1
26626 4	1.0-5.0	3.8	138	36	1
26627 1	2.0-8.0	3.8	142	41	1

285-900 **Torque-Setter.**
Setting tool for variable torque screwdrivers.
Included in every torque screwdriver delivery.

Blade: Octagonal blade, through hardened, zinc-plated.
Handle: Cellulose acetate with micro-fine surface structure.

Order-No.			
26864 0	80	150	1

AC 1000V
IEC 60900:2004

2879 **Torque VDE TORX® interchangeable blade.**
Insulation up to 1000 V AC, GS-mark.
Exclusively for Wiha VDE torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Standards: Manufactured acc. to IEC 60900:2004,
each tool individually tested at 10 000 volts.
Application: For controlled fastening on live parts up to 1000 V AC.

Order-No.					max. Nm	
27956 1	T8	3.8	220	65	1.3	5
27957 8	T9	3.8	220	65	2.5	5
27958 5	T10	3.8	220	65	3.8	5
27959 2	T15	3.8	220	65	5.5	5
27960 8	T20	3.8	220	65	8.0	5
27961 5	T25	3.8	220	65	8.0	5

Products on this page are VDE-tested

Torque VDE interchangeable blades.

AC 1000V
IEC 60900:2004

2879 **Torque VDE slotted interchangeable blade.**
Insulation up to 1000 V AC, GS-mark.
Exclusively for Wiha VDE torque screwdrivers.

Standards: Tip DIN ISO 2380.

Order-No.						max. Nm	
26687 5	0.5	3.0	3.8	220	65	0.6	5
26688 2	0.6	3.5	3.8	220	65	1.1	5
26689 9	0.8	4.0	3.8	220	65	2.5	5
26690 5	1.0	5.5	3.8	220	65	3.8	5

AC 1000V
IEC 60900:2004

NEW
2879 **Torque VDE Xeno interchangeable blade**
for terminal screws (slotted/ Phillips).
Insulation up to 1000 V AC, GS-mark.
Exclusively for Wiha VDE torque screwdrivers.

Order-No.					max. Nm		
33585 4	SL/PH1	3.8	220	65	3.8		5
33571 7	SL/PH2	3.8	220	65	5.5	slim version	5

AC 1000V
IEC 60900:2004

NEW
2879 **Torque VDE Xeno interchangeable blade**
for terminal screws (slotted/ Pozidriv).
Insulation up to 1000 V AC, GS-mark.
Exclusively for Wiha VDE torque screwdrivers.

Order-No.					max. Nm		
33572 4	SL/PZ1	3.8	220	65	3.8		5
33586 1	SL/PZ2	3.8	220	65	5.5	slim version	5

AC 1000V
IEC 60900:2004

NEW
2879 **Torque VDE Phillips interchangeable blade.**
Insulation up to 1000 V AC, GS-mark.
Exclusively for Wiha VDE torque screwdrivers.

Standards: Tip DIN ISO 8764.

Order-No.					max. Nm		
26691 2	PH0	3.8	220	65	0.9		5
26692 9	PH1	3.8	220	65	3.8		5
26693 6	PH2	3.8	220	65	5.5	slim version	5

AC 1000V
IEC 60900:2004

NEW
2879 **Torque VDE Pozidriv interchangeable blade.**
Insulation up to 1000 V AC, GS-mark.
Exclusively for Wiha VDE torque screwdrivers.

Standards: Tip DIN ISO 8764.

Order-No.					max. Nm		
26694 3	PZ0	3.8	220	65	0.9		5
26695 0	PZ1	3.8	220	65	3.8		5
26696 7	PZ2	3.8	220	65	5.5	slim version	5

Wiha Inomic® VDE.

Completely relaxed.

product design award 2007

reddot design award winner 2007

How can maximum safety and effective working be combined with live parts?
It's possible, with the Wiha Inomic® VDE.

A principle of nature has inspired Wiha for the design of this pliers range: the angled form of the pliers means the user can work without tiring limbs, sinews and muscles, and he can apply a powerful grip when cutting. That means: tiredness and aching limbs are not an issue even after hours of work.

The relaxed position of the hand when using Inomic® VDE ensures fatigue-free work. Guaranteed with highest electrical safety level.

And just to be on the safe side: Wiha Inomic® VDE pliers are regularly subjected to a wide range of stringent quality inspections, thus repeatedly confirming their high normative quality.

Safety and functionality at the highest level – and with unashamedly good looks!

AC 1000V IEC 60900:2004

Approved for work in the area of live parts up to 1,000 V AC or 1,500 V DC.

When working with VDE tools, observe the national safety and accident prevention regulations.

Wiha Inomic® VDE.

- **Uncompromisingly safe**
  Manufactured and inspected according to IEC 60900:2004, one-off testing at 10,000 V, GS mark for inspected safety, VDE tested
- **Gentle**
  The angled form is easy on muscles, tendons and joints
- **Powerful**
  All fingers grip at the same time.
- **Robust and durable**
  Strong pliers jaws, complete zinc-nickel coating, impact resistant construction
- **Sensitive**
  Greater control with grasping via opening spring with fine resistance
- **Ergonomic**
  Like the extension of a hand: grasping is simple, firm and safe
- **Attractive**
  An appealing design

Combination pliers.

AC 1000V IEC 60900:2004

Z 01 9 16 **Combination pliers Inomic® VDE.**
Insulation up to 1000 V AC, GS-mark.

Standards: Manufactured acc. to IEC 60900:2004.
Head shape: With cutting edge for flat and round cable.
Design: Serrated gripper jaws.
Cutting edges additionally induction hardened to approx. 62 HRC.
Arms of the pliers move in parallel: +25% force transfer.
Angled shape (23°) for fatigue-free work.
With opening spring and locking mechanism.
Material: Pliers head of high-quality tool steel.
Handles made of tough fibre-glass reinforced plastic, ergonomic soft grip zone in the handle.
Application: For gripping, holding and cutting.
With improved access to the objects to be processed.

Order-No.	Typ					
30658 8	180	3.5	2.5	1.6	160	5

Needle nose pliers and diagonal cutters.

AC 1000V IEC 60900:2004

Z 06 9 16 **Needle nose pliers Inomic® VDE.**
Insulation up to 1000 V AC, GS-mark.

Standards: Manufactured acc. to IEC 60900:2004.
Head shape: Straight shape with blade and three stripping points 2.5 mm², 1.5 mm², 0.75 mm².
Design: Serrated gripper jaws.
Cutting edges additionally induction hardened to approx. 62 HRC.
Arms of the pliers move in parallel: +25% force transfer.
Angled shape (23°) for fatigue-free work.
With opening spring and locking mechanism.
Material: Pliers head of high-quality tool steel.
Handles made of tough fibre-glass reinforced plastic, ergonomic soft grip zone in the handle.
Application: For gripping, holding, cutting and stripping.
With improved access to the objects to be processed.

Order-No.	Typ					
30661 8	160	2.5	1.6	155	5

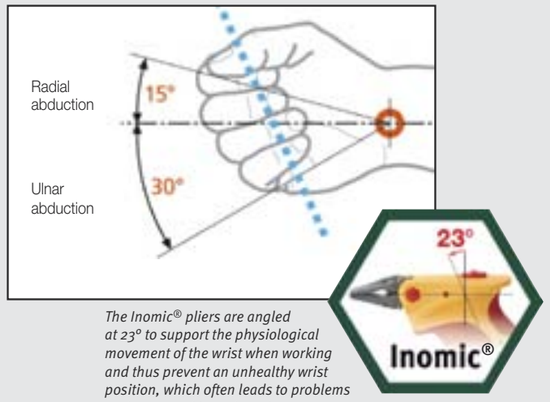

The Inomic® pliers are angled at 23° to support the physiological movement of the wrist when working and thus prevent an unhealthy wrist position, which often leads to problems such as carpal tunnel syndrome.

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	Soft wire	Copper, aluminium	220 - 250
○	Medium hard wire	Iron nail	750 - 800
○	Hard wire	Spring wire, steel nails	1.600 - 1.800
●	Piano wire	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Products on this page are VDE-tested

AC 1000V IEC 60900:2004

Z 12 9 16 **Diagonal cutters Inomic® VDE.**
Insulation up to 1000 V AC, GS-mark.

Standards: Manufactured acc. to IEC 60900:2004.
Head shape: Innovative head with dual cutting function.
Cutting edge with bevel near the joint, cutting edge without bevel in the front cutting area.
Design: Cutting edges additionally induction hardened to approx. 62 HRC.
Arms of the pliers move in parallel: +25% force transfer.
Angled shape (23°) for fatigue-free work.
With opening spring and locking mechanism.
Material: Head of pliers made of ball-bearing steel, hardened to approx. 60 HRC.
Handles made of tough fibre-glass reinforced plastic, ergonomic soft grip zone in the handle.
Application: For cutting hard wires in the joint area.
Flush, burr-free cutting of soft wires, cables and plastics in the front cutting area.
With improved access to the objects to be processed.

Order-No.	Typ					
30666 3	160	3.5	2.5	1.6	145	5

Wiha Professional electric.

Completely reliable.

Focus Energy Silber 2006

Wiha received the "Focus in Silber" award for outstanding design.

Hard, comfortable elastomer zones ensure low friction in the movement range of the fingers

The stops on the ends of the arms prevent the hands from slipping

The robust, ergonomic handle is carefully fixed to the pliers

Valuable chrome plating for long lasting corrosion protection

Extra broad arms made of soft, non-slip elastomer are gentle on the parts of the hand that are sensitive to pressure

Harmonious design of the front part of the handle for an optimum finger hold when applying force

For the VDE-tested Wiha Professional electric pliers only one thing counts: to protect the user one hundred percent when working precisely with live parts.

The new DynamicJoint construction proves its worth: it makes cutting significantly easier and helps to eliminate the danger of cramping or slipping due to excessive force of power.

In addition the handle insulation and curved handle ends that prevent the fingers slipping away ensure even more safety.

*Up to **40% less force** for cutting. The low expenditure of energy thanks to DynamicJoint is especially advantageous when cutting a large number of hard objects.*

Must maintain the highest level of electrical safety! All Wiha Professional electric pliers meet the strict VDE requirements.

AC 1000V IEC 60900:2004

Approved for work in the area of live parts up to 1,000 V AC or 1,500 V DC.

When working with VDE tools, observe the national safety and accident prevention regulations.

Wiha Professional electric.

- **Uncompromisingly safe**
  Manufactured and inspected according to IEC 60900:2004, one-off testing at 10,000 V, GS mark for inspected safety, VDE tested
- **Powerful**
  With DynamicJoint, the high quality joint construction for simple, long-term cutting efficiency
- **As hard as steel**
  Pliers head drop forged from high quality steels
- **Robust and durable**
  Cutting edges are individually tempered and additionally induction hardened, joints are extremely wear resistant and can withstand high stresses, and with high-quality riveting
- **Ergonomic**
  Extra wide handle backs, with soft and hard zones perfectly distributed across the handle
- **Attractive**
  Award-winning design

Combination and stripping pliers.

AC 1000V IEC 60900:2004

NEW

Z 01 0 06 **Combination pliers Professional electric. Insulation 1000 V AC, VDE-tested and with GS mark.**

Standards: DIN ISO 5746. Manufactured acc. to IEC 60900:2004.
Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws. Cutting edges additionally induction hardened to approx. 62 HRC. The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, tempered.
Application: General purpose pliers for gripping and holding as well as cutting soft and hard wires and cables.

Order-No.	mm	"				
26705 6	160	6 ½	3.2	2.0	195	5
26708 7	180	7	3.4	2.2	245	5
26711 7	200	8	3.6	2.5	325	5

AC 1000V IEC 60900:2004

NEW

Z 02 0 06 **High leverage combination pliers Professional electric. Insulation 1000 V AC, VDE-tested and with GS mark.**

Standards: DIN ISO 5746. Manufactured acc. to IEC 60900:2004.
Head shape: Extra long cutting edge for flat and round cables.
Design: Serrated gripper jaws. Particularly powerful leverage results in 40% less effort being required for cutting tasks compared with standard combination pliers. Cutting edges additionally inductively hardened to approx. 64 HRC, therefore also appropriate for cutting piano wire. The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, specially tempered.
Application: Power assisted general purpose pliers for gripping and holding as well as cutting wires and cables ranging in hardness from soft to extremely hard.

Order-No.	mm	"					
26714 8	200	8	3.8	2.8	2.3	315	5

AC 1000V IEC 60900:2004

Z 55 0 06 **Stripping pliers Professional electric. Insulation 1000 V AC, VDE-tested and with GS mark.**

Standards: DIN ISO 5743. Manufactured acc. to IEC 60900:2004.
Head shape: Precision cutting edge prism for even cutting of cable insulation.
Design: An easy to use adjusting screw allows the stripping diameter to be set. Opening spring for effortless and sensitive handling of pliers.
Material: High-quality tool steel, tempered.
Application: Simple stripping of cables and strands of up to ø 5 mm = 10 mm² conductor cross-section. For all work on or around electrical components up to 1000 V AC.

Order-No.	mm	"		
26847 3	160	6 ½	155	5

Long-flat and needle nose pliers.

AC 1000V IEC 60900:2004

Z 05 0 06 **Needle nose pliers Professional electric with cutting edge. Insulation 1000 V AC, VDE-tested and with GS mark.**

Standards: DIN ISO 5745. Manufactured acc. to IEC 60900:2004.
Head shape: Straight shape.
Design: Extra long cutting edge for flat and round cables. Gripping surfaces serrated in parts. Cutting edges additionally induction hardened to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Gripping and holding as well as cutting soft and hard wires and cables. Preferred choice in the electrical sectors. For all work on or around electrical components up to 1000 V AC.

Order-No.	mm	"				
26720 9	160	6 ½	2.5	1.8	155	5
26727 8	200	8	2.8	2.0	200	5

AC 1000V IEC 60900:2004

Z 05 1 06 **Needle nose pliers Professional electric with cutting edge. Insulation 1000 V AC, VDE-tested and with GS mark.**

Standards: DIN ISO 5745. Manufactured acc. to IEC 60900:2004.
Head shape: Angled, approx. 40°.
Design: Extra long cutting edge for flat and round cables. Gripping surfaces serrated in parts. Cutting edges additionally induction hardened to approx. 62 HRC.
Material: High-quality tool steel, tempered.
Application: Gripping and holding as well as cutting soft and hard wires and cables. Preferred choice in the electrical sectors. For all work on or around electrical components up to 1000 V AC.

Order-No.	mm	"				
26728 5	160	6 ½	2.5	1.8	155	5
26729 2	200	8	2.8	2.0	200	5

AC 1000V IEC 60900:2004

Z 07 0 06 **Long-flat nose pliers Professional electric. Insulation 1000 V AC, VDE-tested and with GS mark.**

Standards: DIN ISO 5745. Manufactured acc. to IEC 60900:2004.
Head shape: Extra long head.
Design: Ridged gripping surfaces.
Material: High-quality tool steel, tempered.
Application: Gripping and right-angled bending of wires and sheet metal parts. For all work on or around electrical components up to 1000 V AC.

Order-No.	mm	"		
26732 2	160	6 ½	160	5

Products on this page are VDE-tested

Wiha Professional electric.

Completely reliable.

Round nose pliers and diagonal cutters.

AC 1000V IEC 60900:2004

Z 09 0 06 **Long-round nose pliers Professional electric.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: DIN ISO 5745. Manufactured acc. to IEC 60900:2004.
Head shape: Extra long head.
Design: Ridged gripping surfaces.
Material: High-quality tool steel, tempered.
Application: Gripping and bending of wires and sheet metal parts.

Order-No.	mm	"		
26735 3	**160**	**6 ½**	140	5

AC 1000V IEC 60900:2004

NEW

Z 12 0 06 **Diagonal cutters Professional electric.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: DIN ISO 5749. Manufactured acc. to IEC 60900:2004.
Head shape: Semi-circular, swedish style.
Design: Low wear lap joint, riveted and able to withstand high loads. Lightweight action, clean cutting achieved by specially milled precision cutting edges. Durable cutting edges due to additional induction hardening to approx. 62 HRC. The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, tempered.
Application: Universal cutter for cutting soft and hard wires and cables, also suitable for cutting and stripping cables.

Order-No.	mm	"	○	○	○		
26737 7	**140**	**5 ½**	4.0	2.5	1.8	160	5
26741 4	**160**	**6 ½**	4.0	2.8	2.0	200	5
26744 5	**180**	**7**	4.0	3.0	2.5	250	5

AC 1000V IEC 60900:2004

NEW

Z 16 0 06 **Heavy duty diagonal cutters Professional electric.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: DIN ISO 5749. Manufactured acc. to IEC 60900:2004.
Head shape: Semi-circular.
Design: Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting achieved by specially milled precision cutting edges. Long term cutting is achieved through additional inductive hardening to approx. 64 HRC. The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, specially tempered.
Application: Power-assisted all-round diagonal cutter for cutting soft to extremely hard wires and cables.

Order-No.	mm	"	○	○	●		
26748 3	**160**	**6 ½**	3.5	2.5	2.0	190	5
26751 3	**180**	**7**	3.8	2.7	2.3	260	5
26754 4	**200**	**8**	4.2	3.0	2.5	315	5

Diagonal and cable cutters.

AC 1000V IEC 60900:2004

NEW

Z 14 0 06 **Electrician's diagonal cutters Professional electric.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: DIN ISO 5749. Manufactured acc. to IEC 60900:2004.
Head shape: Semi-circular, swedish style.
Design: Low wear lap joint, riveted and able to withstand high loads. The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges. Lightweight action, clean cutting achieved by specially milled precision cutting edges. Durable cutting edges due to additional induction hardening to approx. 62 HRC. Rear cutting area near to plier joint also suitable for medium-hard and hard wire. Front cutting area for soft wire, with precision stripping stations for 1.5 mm² and 2.5 mm² single-wire conductor.
Material: Special tool-steel, hardened & tempered.
Application: Special diagonal cutters with additional function for electrical installation. For all work on or around electrical components up to 1000 V AC.

Order-No.	mm	"	○	○		
26745 2	**160**	**6 ½**	4.0	2.0	200	5

AC 1000V IEC 60900:2004

NEW

Z 50 1 06 **Cable cutters Professional electric.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: Manufactured acc. to IEC 60900:2004.
Head shape: Classic cutting form.
Design: Light, energy-saving and clean cutting with specially ground precision cutting edges. Durable cutting edges due to additional induction hardening to approx. 62 HRC. Safety stop prevents finger injuries after cutting.
Material: Special tool-steel, hardened & tempered.
Application: Cable cutter for cutting of copper and aluminium cables without crushing, also suitable for stripping. Not for steel cable, wires and copper conductors with hard coatings. For all work on or around electrical components up to 1000 V AC.

Order-No.	mm	"	Ø	mm²		
34743 7	**160**	**6 ½**	16	50	190	5
34744 4	**200**	**8**	20	60	305	5

Products on this page are VDE-tested

Pliers set.

AC 1000V IEC 60900:2004

Z 99 0 001 06 **Pliers set Professional electric, 3 pcs.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Design: All pliers made of high quality tool steel, hardened, polished and chrome-plated. Multi-component handles with slip guard for safe and comfortable operation. Individually tested for electrical safety in accordance with IEC 60900:2004. Weight 820 g.

Content:
VDE combination pliers, series Z 01 0 06, 180 mm
– with Wiha DynamicJoint
VDE diagonal cutters, series Z 12 0 06, 160 mm
– with Wiha DynamicJoint
Needle nose pliers series Z 05 0 06, 200 mm

Application: All tools suitable for use with or near live components up to 1000 V AC. For all work on or around electrical components up to 1000 V AC.

Order-No.	Series	
26852 7	**Z 99 0 001 06**	1

Tool set.

AC 1000V IEC 60900:2004

Z 99 0 002 06 **Tool set Professional electric Mix, 5 pcs.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Design: Pliers made of high quality tool steel, hardened, polished and chrome plated. Multi-component handles with slip guard for safe and comfortable operation. Insulated screwdrivers. Tips with black finish. Individually tested for electrical safety in accordance with IEC 60900:2004. Weight 780 g.

Content:
Needle nose pliers series Z 05 0 06, 200 mm
VDE diagonal cutters, series Z 12 0 06, 160 mm
– with Wiha DynamicJoint
Wiha SoftFinish® electric screwdriver:
– slotted screwdriver, series 320N: 3.5x100 / 5.5x125
– Phillips screwdriver, series 321N: PH2x100

Application: The small, basic set of pliers and screwdrivers for skilled electricians. For all work on or around electrical components up to 1000 V AC.

Order-No.	Series	
26755 1	**Z 99 0 002 06**	1

Wiha Info

NEW

Wiha DynamicJoint – Top of their class

- **Innovative:** Unique joint construction, patent applied for
- **Effective:** Low loss of force means **less force needed for cutting** – up to 40%
- **Permanent:** Optimal performance even after thousands of cuts

*Up to **40% less force** for cutting*

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm²
○	**Soft wire**	Copper, aluminium	220 - 250
○	**Medium hard wire**	Iron nail	750 - 800
○	**Hard wire**	Spring wire, steel nails	1.600 - 1.800
●	**Piano wire**	Hardened spring steel	2.200 - 2.300

Test wires standardised in DIN ISO 5744

Products on this page are VDE-tested

Wiha Professional electric.

Completely reliable.

Cable shears.

Z 71 1 06 **Cable shears Professional electric.**

Head shape: Lightweight standard model, straight.
Design: Standard model with wire stripper, cutting length 37 mm.
Screw joint, adjustable cutting blades.
Extruded plastic handle for a secure hold when cutting.
Material: C 50 carbon steel, hardened, nickel-plated.
Application: Universal cutter for electricians and other trades, also suitable for cutting and cutting back of cables.

Order-No.	mm	"		
27907 3	**145**	**5 ¾**	95	5

Cable shears.

Z 71 4 06 **Electrician's / craftsman's cutters Professional electric.**

Head shape: Sturdy model, straight, very robust, micro-toothed cutting.
Design: Precision model with wire stripper; cutting length 50 mm.
Concealed, adjustable screw joint.
Extruded handle made of impact-resistant plastic for powerful and safe cutting.
Material: High-alloy carbon steel, hardened, black finish.
Application: Highly-developed universal cutter for electricians and other trades, also suitable for cutting and stripping copper cables.

Order-No.	mm	"			
27910 3	**145**	**5 ¾**	120	manganese-phosphated	5

Z 71 6 06 **Electrician's / craftsman's cutters Professional electric.**

Head shape: Strong, powerful design, straight, very robust, micro-ridged blade.
Design: Particularly comfortable two-component handle with soft zone in area subject to compressive stress.
Cutting edge with wire cutter, cutting length 43 mm, cutting edge hardness approx. 56 HRC.
Concealed, adjustable screw joint.
Material: Blades made of stainless steel, handles made of high-quality plastics.
Application: Qualitative, comfortable universal shears for electricians and many applications for trade and industry.
Also suitable for cutting and cutting back of cables.

Order-No.	mm	"		
33910 4	**145**	**5 ¾**	80	5

Z 71 5 06 **Electrician's / craftsman's cutters Professional electric.**

Head shape: Standard model, straight, micro-toothed blade.
Design: Particularly comfortable two-component handle with soft zone in area subject to compressive stress.
Cutting edge with wire cutter, cutting length 34 mm.
Concealed, adjustable screw joint.
Material: Blades made of stainless steel, handles made of high-quality plastics.
Application: Comfortable universal cutter for many applications in trade and industry, also suitable for cutting and stripping cables.

Order-No.	mm	"		
29420 5	**145**	**5 ¾**	60	5

Wiha crimp tools.

Crimp tools.

Z 62 0 000 06 **Crimp tools for wire-end sleeves.**

Standards: Wire-end sleeves with and without isolating collar according to DIN 46228, EN 50027.
Head shape: Square crimp, linear pressing.
Design: Tool with only one crimp profile.
Automatic adjustment of cross-section area.
Lateral contact feed.
Low hand force required with optimal transmission.
Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set.
Ergonomically formed soft handle with slip protection for especially comfortable handling.
Material: Of high-tensile special steel.
Parts subject to extreme loading are specially hardened and tempered.
Application: For processing of wire-end sleeves with and without isolating collars, especially suitable for processing of twin sleeves.

Order-No.	mm	Ø mm	AWG		
33845 9	**196**	**0.08 – 10**	28 – 8	300	1

Crimp tools.

Z 62 0 002 06 **Crimping tools for isolated cable eyes and contacts.**

Standards: Isolated cable eyes and connectors according to DIN.
Head shape: Oval crimp, radial pressing.
Conducting and isolating crimp are carried out in one work step.
Design: Crimp profile:
Red profile: 0.5 - 1.0 mm² / AWG 20 - 16
Blue profile: 1.5 - 2.5 mm²/ AWG 16 - 14
Yellow profile: 4.0 - 6.0 mm² / AWG 12 - 10
Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set.
Ergonomically formed soft handle with slip protection for especially comfortable handling.
Material: Of high-tensile special steel.
Parts subject to extreme loading are specially hardened and tempered.
Application: For processing of red, blue and yellow isolated cable eyes, pin-end cable connectors, contact pins, contact pin sleeves, circular pins, circular pin sleeves, batch connectors and parallel connectors.
For standardised, solderless electrical connections.

Order-No.	mm	Ø mm	AWG		
33841 1	**220**	**0.5 – 6**	20 – 10	510	1

Z 62 0 001 06 **Crimp tools for wire-end sleeves.**

Standards: Wire-end sleeves with and without isolating collar according to DIN 46228, EN 50027.
Head shape: Trapezoid crimp, radial travel.
Design: Crimp profile:
Profile 1. 0.14 - 0.75 mm² / AWG 26 - 18
Profile 2. 1.0 - 1.5 mm²/ AWG 18 - 16
Profile 3. 2.5 mm² / AWG 14
Profile 4. 4.0 mm² / AWG 12
Profile 5. 6.0 mm²/ AWG 10
Profile 6. 10.0 mm² / AWG 8
Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set. Ergonomically formed soft handle with slip protection for especially comfortable handling.
Material: Of high-tensile special steel.
Parts subject to extreme loading are specially hardened and tempered.
Application: For processing of wire-end sleeves with and without isolating collars.

Order-No.	mm	Ø mm	AWG		
33844 2	**220**	**0.14 – 10**	26 – 8	510	1

Z 62 0 003 06 **Crimping tools for non-isolated contact pins.**

Standards: Non-isolated contact pin according to DIN 46247.
Head shape: B-crimp, radial pressing.
Conducting and isolating crimp are carried out in one work step.
Design: Crimp profile:
Contact width 6.3 / 9.5 mm
Profile 1. 0.25 - 0.5 mm² / AWG 22 - 20 / F 6.3 + 9.5
Profile 2. 0.5 - 1.0 mm² / AWG 20 - 16 / F 6.3 + 9.5
Profile 3. 1.5 - 2.5 mm²/ AWG 16 - 14 / F 6.3 + 9.5
Profile 4. 4.0 - 6.0 mm² / AWG 12 - 10 / F 6.3 + 9.5
Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set. Ergonomically formed soft handle with slip protection for especially comfortable handling.
Material: Of high-tensile special steel.
Parts subject to extreme loading are specially hardened and tempered.
Application: For processing of non-isolated contact pins and contact pin sleeves for standardised, solderless electrical connections.

Order-No.	mm	Ø mm	AWG		
33842 8	**220**	**0.25 – 6**	22 – 10	510	1

Wiha crimp tools and stripping pliers.

Crimp tools.

Z 62 0 004 06 **Crimping tools for non-isolated cable eyes with closed sleeve.**

Standards: Non-isolated cable eyes with closed crimping sleeve according to DIN 46234 / DIN 46230 / DIN 46341.

Head shape: W injection, radial pressing.

Design: Crimp profile:
Profile 1. 0.1 - 0.5 mm² / AWG 26 - 20
Profile 2. 0.5 - 2.5 mm² / AWG 20 - 14
Profile 3. 4.0 - 6.0 mm² / AWG 12 - 10
Profile 4. 10.0 - 16.0 mm² / AWG 8 - 6
Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set.
Ergonomically formed soft handle with slip protection for especially comfortable handling.

Material: Of high-tensile special steel.
Parts subject to extreme loading are specially hardened and tempered.

Application: For processing of non-isolated cable eyes, pin-end cable connectors, batch connectors and mini cable eyes.
For solderless electrical connections according to standards.

Order-No.	mm	Ø mm	AWG		
33843 5	**220**	**0.1 – 16**	26 – 6	510	1

Stripping pliers and stripping cassette.

24672SB **Automatic stripping pliers.**

Design: Self-adjusting straight cutting edge in exchangeable cassette and wire cutter for copper and Al conductors. Optimally positioned wire cutter enables effortless cutting of multi-wire conductors to 10 mm² / 8 AWG. Simply replaceable stripping cassette with adjustable stripping length to 18 mm and adjustable cutting depth for various insulation materials. Ergonomically sophisticated solution with soft plastic zone in main handle, secure gripping without play, optimised handle opening width, an angled head as well as a low weight for working without fatigue.

Material: Housing of tough glass-fibre reinforced plastic.
Soft plastic zone in upper handle section used for gripping.

Application: For precise stripping and cutting of single, multi and fine-wired cables for many tasks in the electronics industry.

Order-No.	mm	"	Ø mm	AWG		
33847 3	**190**	**7½**	0.02 – 10	34 – 8	135	1

24673SB **Stripping cassette for automatic stripping pliers.**

Design: Cassette with straight blade.

Order-No.	Ø mm	AWG		
33846 6	**0.02 – 10**	**34 – 8**	7	1

Wiha VDE application sets.

The right tool for any application.

VDE application sets.

9300-007 **Tool set for switch cabinet construction, 31 pcs.**
Phillips blades.

Design: VDE tools with protective isolation 1,000 VAC, GS-tested.
Individually tested for electrical safety according to EN/IEC 60900:2004.
With 90 mm bits for reaching lower-lying screws in switch cabinet systems, fuse boxes and terminal blocks.
Automatic stripping pliers for fast, fatigue-free work.

Pouch: Practical, space-saving folding bag for the workbench and on the road.
Orderly, clearly laid-out arrangement of the tools for fast, clean work.
Bag format: 33 x 27 x 6 cm.

Content: Insulated VDE-tested tools:
Professional electric needle nose pliers, 200 mm (Z 05 0 06 series)
Professional electric diagonal cutter, 160 mm (Z 12 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 3.0x100 / 4.0x100 / 5.5x125 (320N series)
– Phillips screwdriver, PH1x80 / PH2x100 / PH3x150 (321N series)
Non-insulated tools:
Wiha Xeno bit, style E 6.3:
– Slotted/Phillips bit, PH1x90 / PH2x90 (7049XH series)
Wiha Standard bit, style E 6.3:
– Phillips bit, PH1x90 / PH2x90 / PH3x90 (7041 Z series)
– TORX® bit, T10x90 / T15x90 / T20x90 / T25x90 / T30x90 (7045 ZL series)
Plastic folding metre rule 2 m 41020002
Wiha hexagon L-key, metric:
– Hexagon L-key set, 1.5-10 mm (369 H9 series)
Switch cabinet spirit level (246 series)
Automatic stripping pliers (246 series)

Application: Basic tool set for switch cabinet builders.

Order-No.	Series	
33148 1	**9300-007**	1

VDE application sets.

9300-008 **Tool set for switch cabinet construction, 31 pcs.**
Pozidriv blades.

Design: VDE tools with protective isolation 1,000 VAC, GS-tested.
Individually tested for electrical safety according to EN/IEC 60900:2004.
With 90 mm bits for reaching lower-lying screws in switch cabinet systems, fuse boxes and terminal blocks.
Automatic stripping pliers for fast, fatigue-free work.

Pouch: Practical, space-saving folding bag for the workbench and on the road.
Orderly, clearly laid-out arrangement of the tools for fast, clean work.
Bag format: 33 x 27 x 6 cm.

Content: Insulated VDE-tested tools:
Professional electric needle nose pliers, 200 mm (Z 05 0 06 series)
Professional electric diagonal cutter, 160 mm (Z 12 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 3.0x100 / 4.0x100 / 5.5x125 (320N series)
– Pozidriv screwdriver, PZ1x80 / PZ2x100 / PZ3x150 (324 series)
Non-insulated tools:
Wiha Xeno bit, style E 6.3:
– Slotted/Pozidriv bit, PZ1x90 / PZ2x90 (7049XZ series)
Wiha Standard bit, style E 6.3:
– Pozidriv bit, PZ1x90 / PZ2x90 / PZ3x90 (7042 Z series)
– TORX® bit, T10x90 / T15x90 / T20x90 / T25x90 / T30x90 (7045 ZL series)
Plastic folding metre rule 2 m 41020002
Wiha hexagon L-key, metric:
– Hexagon L-key set, 1.5-10 mm (369 H9 series)
Switch cabinet spirit level (246 series)
Automatic stripping pliers (246 series)

Application: Basic tool set for switch cabinet builders.

Order-No.	Series	
33149 8	**9300-008**	1

Wiha VDE application sets.

The right tool for any application.

VDE application sets.

9300-002 **Electrician's tool bag, 12 pcs.**

Design: High-quality tools in practical tool bag with carrying handle.
VDE tools with insulation up to 1000 V AC, GS-mark.
Individually tested for electrical safety in accordance with IEC 60900:2004.
Bag format approx. 33 x 27 x 5.5 cm.
Weight 2000 g.

Content: Insulated tools:
Professional electric combination pliers, 180 mm (Z 01 0 06 series)
Professional electric diagonal cutter, 160 mm (Z 12 0 06 series)
Professional electric stripping pliers, 160 mm (Z 55 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 3.5x100 / 5.5x125 (320N series)
– Phillips screwdriver, PH1 / PH2 (321N series)
Single-pole voltage tester VDE 255-3
Magazine bit holder, 38090201
Non-insulated tools:
XSelector 7944-904 (PH / PZ / TORX®)
Plastic folding metre rule 1 m 41010002
Plastic folding metre rule 2 m 41020002

Order-No.	Series	
28143 4	**9300-002**	1

VDE application sets.

9300-009 **Tool set for service technicians, 29 pcs.**
Mixed sets.

Design: VDE tools with protective isolation 1000 VAC, GS-tested.
Individually tested for electrical safety according to EN/IEC 60900:2004.
Automatic stripping pliers for fast, fatigue-free work.
With tool combinations for electronic applications.

Pouch: Combined laptop bag/ toolbag; ideal for the service technician.
Can be completely folded open with zipper.
Several pocket compartments for hand tools, laptop and documents.
Sufficient space for individual additional equipment.
Laptop bag suitable for all common laptops.
Bag format: approx. 47 x 35 x 22 cm.

Content: Insulated VDE-tested tools:
Professional electric needle nose pliers, 200 mm (Z 05 0 06 series)
Professional electric diagonal cutter, 160 mm (Z 12 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 3.0x100 / 4.0x100 (320N series)
– Phillips screwdriver, PH1x80 / PH2x100 (321N series)
– Pozidriv screwdriver, PZ1x80 / PZ2x100 (324 series)
Single-pole voltage tester, VDE (255-3 series)
Non-insulated tools:
Electronic diagonal cutter, 138 mm (Z 41 1 03 series)
Electronic needle nose pliers, 135 mm (Z 36 0 03 series)
Wiha PicoFinish screwdriver:
– Slotted screwdriver, 1.5x40 / 2.0x40 / 2.5x50 / 3.0x50 (260P series)
– Phillips screwdriver, PH00x40 / PH0x50 (261P series)
Wiha hexagon L-key, metric:
– Hexagon L-key set, 1.5-10 mm (369 H9 series)
Jokari cable stripping knife (246 series)
Switch cabinet key (246 series)
Automatic stripping pliers (246 series)

Application: Basic equipment for the service technician.
Suitable for electrical and electronic maintenance work on machines and components.

Order-No.	Series	
33150 4	**9300-009**	1

VDE application sets.

9300-010 **Tool set for service technicians, 29 pcs.**
Phillips blades.

Design: VDE tools with protective isolation 1000 VAC, GS-tested.
Individually tested for electrical safety according to EN/IEC 60900:2004.
Automatic stripping pliers for fast, fatigue-free work.
With tool combinations for electronic applications.

Pouch: Combined laptop bag/ toolbag; ideal for the service technician.
Can be completely folded open with zipper.
Several pocket compartments for hand tools, laptop and documents.
Sufficient space for individual additional equipment.
Laptop bag suitable for all common laptops.
Bag format: approx. 47 x 35 x 22 cm.

Content: Insulated VDE-tested tools:
Professional electric needle nose pliers, 200 mm (Z 05 0 06 series)
Professional electric diagonal cutter, 160 mm (Z 12 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 2.5x75 / 3.0x100 / 4.0x100 / 5.5x125 (320N series)
– Phillips screwdriver, PH1x80 / PH2x100 (321N series)
Single-pole voltage tester, VDE (255-3 series)
Non-insulated tools:
Electronic diagonal cutter, 138 mm (Z 41 1 03 series)
Electronic needle nose pliers, 135 mm (Z 36 0 03 series)
Wiha PicoFinish screwdriver:
– Slotted screwdriver, 1.5x40 / 2.0x40 / 2.5x50 / 3.0x50 (260P series)
– Phillips screwdriver, PH00x40 / PH0x50 (261P series)
Wiha hexagon L-key, metric:
– Hexagon L-key set, 1.5-10 mm (369 H9 series)
Jokari cable stripping knife (246 series)
Switch cabinet key (246 series)
Automatic stripping pliers (246 series)

Application: Basic equipment for the service technician.
Suitable for electrical and electronic maintenance work on machines and components.

Order-No.	Series	
33151 1	**9300-010**	1

VDE application sets.

9300-011 **Tool set for service technicians, 29 pcs.**
Pozidriv blades.

Design: VDE tools with protective isolation 1000 VAC, GS-tested.
Individually tested for electrical safety according to EN/IEC 60900:2004.
Automatic stripping pliers for fast, fatigue-free work.
With tool combinations for electronic applications.

Pouch: Combined laptop bag/ toolbag; ideal for the service technician.
Can be completely folded open with zipper.
Several pocket compartments for hand tools, laptop and documents.
Sufficient space for individual additional equipment.
Laptop bag suitable for all common laptops.
Bag format: approx. 47 x 35 x 22 cm.

Content: Insulated VDE-tested tools:
Professional electric needle nose pliers, 200 mm (Z 05 0 06 series)
Professional electric diagonal cutter, 160 mm (Z 12 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 2.5x75 / 3.0x100 / 4.0x100 / 5.5x125 (320N series)
– Pozidriv screwdriver, PZ1x80 / PZ2x100 (324 series)
Single-pole voltage tester, VDE (255-3 series)
Non-insulated tools:
Electronic diagonal cutter, 138 mm (Z 41 1 03 series)
Electronic needle nose pliers, 135 mm (Z 36 0 03 series)
Wiha PicoFinish screwdriver:
– Slotted screwdriver, 1.5x40 / 2.0x40 / 2.5x50 / 3.0x50 (260P series)
– Phillips screwdriver, PH00x40 / PH0x50 (261P series)
Wiha hexagon L-key, metric:
– Hexagon L-key set, 1.5-10 mm (369 H9 series)
Jokari cable stripping knife (246 series)
Switch cabinet key (246 series)
Automatic stripping pliers (246 series)

Application: Basic equipment for the service technician.
Suitable for electrical and electronic maintenance work on machines and components.

Order-No.	Series	
33152 8	**9300-011**	1

Wiha VDE application sets.

The right tool for any application.

Slotted/Phillips tool set.

9300-012 **Tool set for electrician's belt bag, 10 pcs.**
Phillips blades and stripping pliers.

Design: VDE tools with insulation up to 1000 V AC, GS-mark.
Individually tested for electrical safety according to EN/IEC 60900:2004.

Pouch: Tool belt bag for electricians, with space for the most important tools for house and building installation.
Bag format: approx. 25 x 27 x 5 cm.

Content: Insulated VDE-tested tools:
Professional electric needle nose pliers, 200 mm (Z 05 0 06 series)
Professional electric stripping pliers, 160 mm (Z 55 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 3.0x100 / 4.0x100 / 5.5x125 (320N series)
– Phillips screwdriver, PH1x80 / PH2x100 (321N series)
Single-pole voltage tester, VDE (255-3 series)
Non-insulated tools:
Jokari cable stripping knife (246 series)
Tape measure 5 m (246 series)

Application: Basic equipment with all necessary tools for all aspects of house and building installation.

Order-No.	Series	
33153 5	9300-012	1

Slotted/Pozidriv tool set.

9300-013 **Tool set for electrician's belt bag, 10 pcs.**
Pozidriv blades and stripping pliers.

Design: VDE tools with insulation up to 1000 V AC, GS-mark.
Individually tested for electrical safety according to EN/IEC 60900:2004.

Pouch: Tool belt bag for electricians, with space for the most important tools for house and building installation.
Bag format: approx. 25 x 27 x 5 cm.

Content: Insulated VDE-tested tools:
Professional electric needle nose pliers, 200 mm (Z 05 0 06 series)
Professional electric stripping pliers, 160 mm (Z 55 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 3.0x100 / 4.0x100 / 5.5x125 (320N series)
– Pozidriv screwdriver, PZ1x80 / PZ2x100 (324 series)
Single-pole voltage tester, VDE (255-3 series)
Non-insulated tools:
Jokari cable stripping knife (246 series)
Tape measure 5 m (246 series)

Application: Basic equipment with all necessary tools for all aspects of house and building installation.

Order-No.	Series	
33154 2	9300-013	1

Slotted/Phillips tool set.

9300-014 **Tool set for electrician's belt bag, 10 pcs.**
Phillips blades and electrician's shears.

Design: VDE tools with insulation up to 1000 V AC, GS-mark.
Individually tested for electrical safety according to EN/IEC 60900:2004.

Pouch: Tool belt bag for electricians, with space for the most important tools for house and building installation.
Bag format: approx. 25 x 27 x 5 cm.

Content: Insulated VDE-tested tools:
Professional electric needle nose pliers, 200 mm (Z 05 0 06 series)
Wiha SoftFinish® electric screwdriver:
– Slotted screwdriver, 3.0x100 / 4.0x100 / 5.5x125 (320N series)
– Phillips screwdriver, PH1x80 / PH2x100 (321N series)
Single-pole voltage tester, VDE (255-3 series)
Non-insulated tools:
Electrician's/craftsman's scissors, 145 mm (Z 71 5 06 series)
Jokari cable stripping knife (246 series)
Tape measure 5 m (246 series)

Application: Basic equipment with all necessary tools for all aspects of house and building installation.

Order-No.	Series	
33155 9	9300-014	1

Bit sets.

79187 T01 **Bit set for switch cabinet construction, 14 pcs.**
Mixed sets.

Bits: 90 mm bits, style E 6.3.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Bit holder with SoftFinish® handle.
Application: Basic bit set for switch cabinet builders.
With 90 mm bits for reaching lower-lying screws in switch cabinet systems, fuse boxes and terminal blocks.
Set with Xeno bits for terminal screws.

Order-No.	Series				
33142 9	79187 T01				1
	281-02	Bit holder with handle, magnetic, 1/4"			
	7148CM	CentroFix quick release holder, magnetic, style E 6.3			
	7049XH	1xSL/PH1	1xSL/PH2		
	7049XZ	1xSL/PZ1	1xSL/PZ2		
	7041 Z	1xPH1	1xPH2		
	7042 Z	1xPZ1	1xPZ2		
	7045 Z L	1xT10	1xT15	1xT20	1xT25

with
Xeno bits

79187 T02 **Bit set for switch cabinet construction, 14 pcs.**
Equipped with Phillips, Xeno-PH and TORX®.

Order-No.	Series					
33143 6	79187 T02					1
	281-02	Bit holder with handle, magnetic, 1/4"				
	7148CM	CentroFix quick release holder, magnetic, style E 6.3				
	7049XH	1xSL/PH1	2xSL/PH2			
	7041 Z	1xPH1	2xPH2	1xPH3		
	7045 Z L	1xT10	1xT15	1xT20	1xT25	1xT10

with
Xeno bits

79187 T03 **Bit set for switch cabinet construction, 14 pcs.**
Equipped with Pozidriv, Xeno-PZ and TORX®.

Order-No.	Series					
33144 3	79187 T03					1
	281-02	Bit holder with handle, magnetic, 1/4"				
	7148CM	CentroFix quick release holder, magnetic, style E 6.3				
	7049XZ	1xSL/PZ1	2xSL/PZ2			
	7042 Z	1xPZ1	2xPZ2	1xPZ3		
	7045 Z L	1xT10	1xT15	1xT20	1xT25	1xT10

Wiha VDE application sets.

The right tool for any application.

Insulated tools.

5590N T15 **Insulated single-sided open-end spanner set, 15 pcs.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: DIN 7446.
Manufactured according to EN/IEC 60900:2004.
Design: Position of jaws angled downward 15°.
Material: Forged chrome vanadium steel.
Pouch: Practical, space-saving roll-up bag for the workbench and on the road.
Application: Safe installation of terminals and sleeves.
For all work on or around electrical components up to 1000 V AC.

Order-No.										
33179 5	5590N T15									1
	5590N	6	7	8	9	10	11	12		
		13	14	15	16	17	19	22	24	

Insulated tools.

5589N K7 **Insulated ratchet box spanner set, 7 pcs.**
Insulation up to 1000 V AC.

Standards: Manufactured according to EN/IEC 60900:2004.
Material: Chrome vanadium steel.
Application: Safe installation of terminals and sleeves.
For all work on or around electrical components up to 1000 V AC.

Order-No.								
33181 8	5589N K7							1
	5589N	8	10	12	13	14	17	19

5590N T8 **Insulated single-sided open-end spanner set, 8 pcs.**
Insulation 1000 V AC, VDE-tested and with GS mark.

Standards: DIN 7446. Manufactured according to EN/IEC 60900:2004.
Design: Position of jaws angled downward 15°.
Material: Forged chrome vanadium steel.
Pouch: Practical, space-saving roll-up bag for the workbench and on the road.
Application: Safe installation of terminals and sleeves.
For all work on or around electrical components up to 1000 V AC.

Order-No.										
33180 1	5590N T8									1
	5590N	7	8	10	11	13	15	17	19	

352N S7 **Insulated L-key set, 7 pcs.**
Insulation up to 1000 V AC.

Standards: Manufactured according to EN/IEC 60900:2004.
Material: Chrome vanadium steel, oil-hardened.
Pouch: Practical, space-saving roll-up bag for the workbench and on the road.
Application: Safe installation of terminals and sleeves, especially for cable-branch clamping rings.
For all work on or around electrical components up to 1000 V AC.

Order-No.									
33182 5	352N S7								1
◉	352N	3	4	5	6	8	10	12	

Insulated tools.

7207N K1001 **3/8" reversible ratchet set, 10 pcs.**
Insulation up to 1000 V AC.

Standards: Manufactured according to EN/IEC 60900:2004.
Design: Simple locking of the actuating tools
with positive locking on the drive square.
Clockwise and anticlockwise running.
Material: Chrome vanadium steel.

Content: Insulated tools:
Insulated 3/8" reversible ratchet, 190 mm (246N 02 series)
Insulated 3/8" extension, 125 mm (7210N series)
Insulated 3/8" nut driver inserts, metric
Ratchet with simple locking of the actuating tools with positive locking on the drive square; clockwise and anticlockwise running.

Application: Safe installation of terminals and sleeves.
For all work on or around electrical components up to 1000 V AC.

Order-No.									
33183 2	7207N K1001								1
	7207N	8	10	11	12	13	14	17	19

Insulated tools.

7208N K1001 **1/2" reversible ratchet set, 10 pcs.**
Insulation up to 1000 V AC.

Standards: Manufactured according to EN/IEC 60900:2004.
Design: Simple locking of the actuating tools
with positive locking on the drive square.
Clockwise and anticlockwise running.
Material: Chrome vanadium steel.

Content: Insulated tools:
Insulated 1/2" reversible ratchet, 260 mm (246N 03 series)
Insulated 1/2" extension, 125 mm (7210N series)
Insulated 1/2" nut driver inserts, metric

Application: Safe installation of terminals and sleeves.
For all work on or around electrical components up to 1000 V AC.

Order-No.										
33184 9	7208N K1001									1
	7208N	10	12	13	14	17	19	22	24	

Wiha ESD tools.

Wiha makes it possible: The right range for your ESD application.

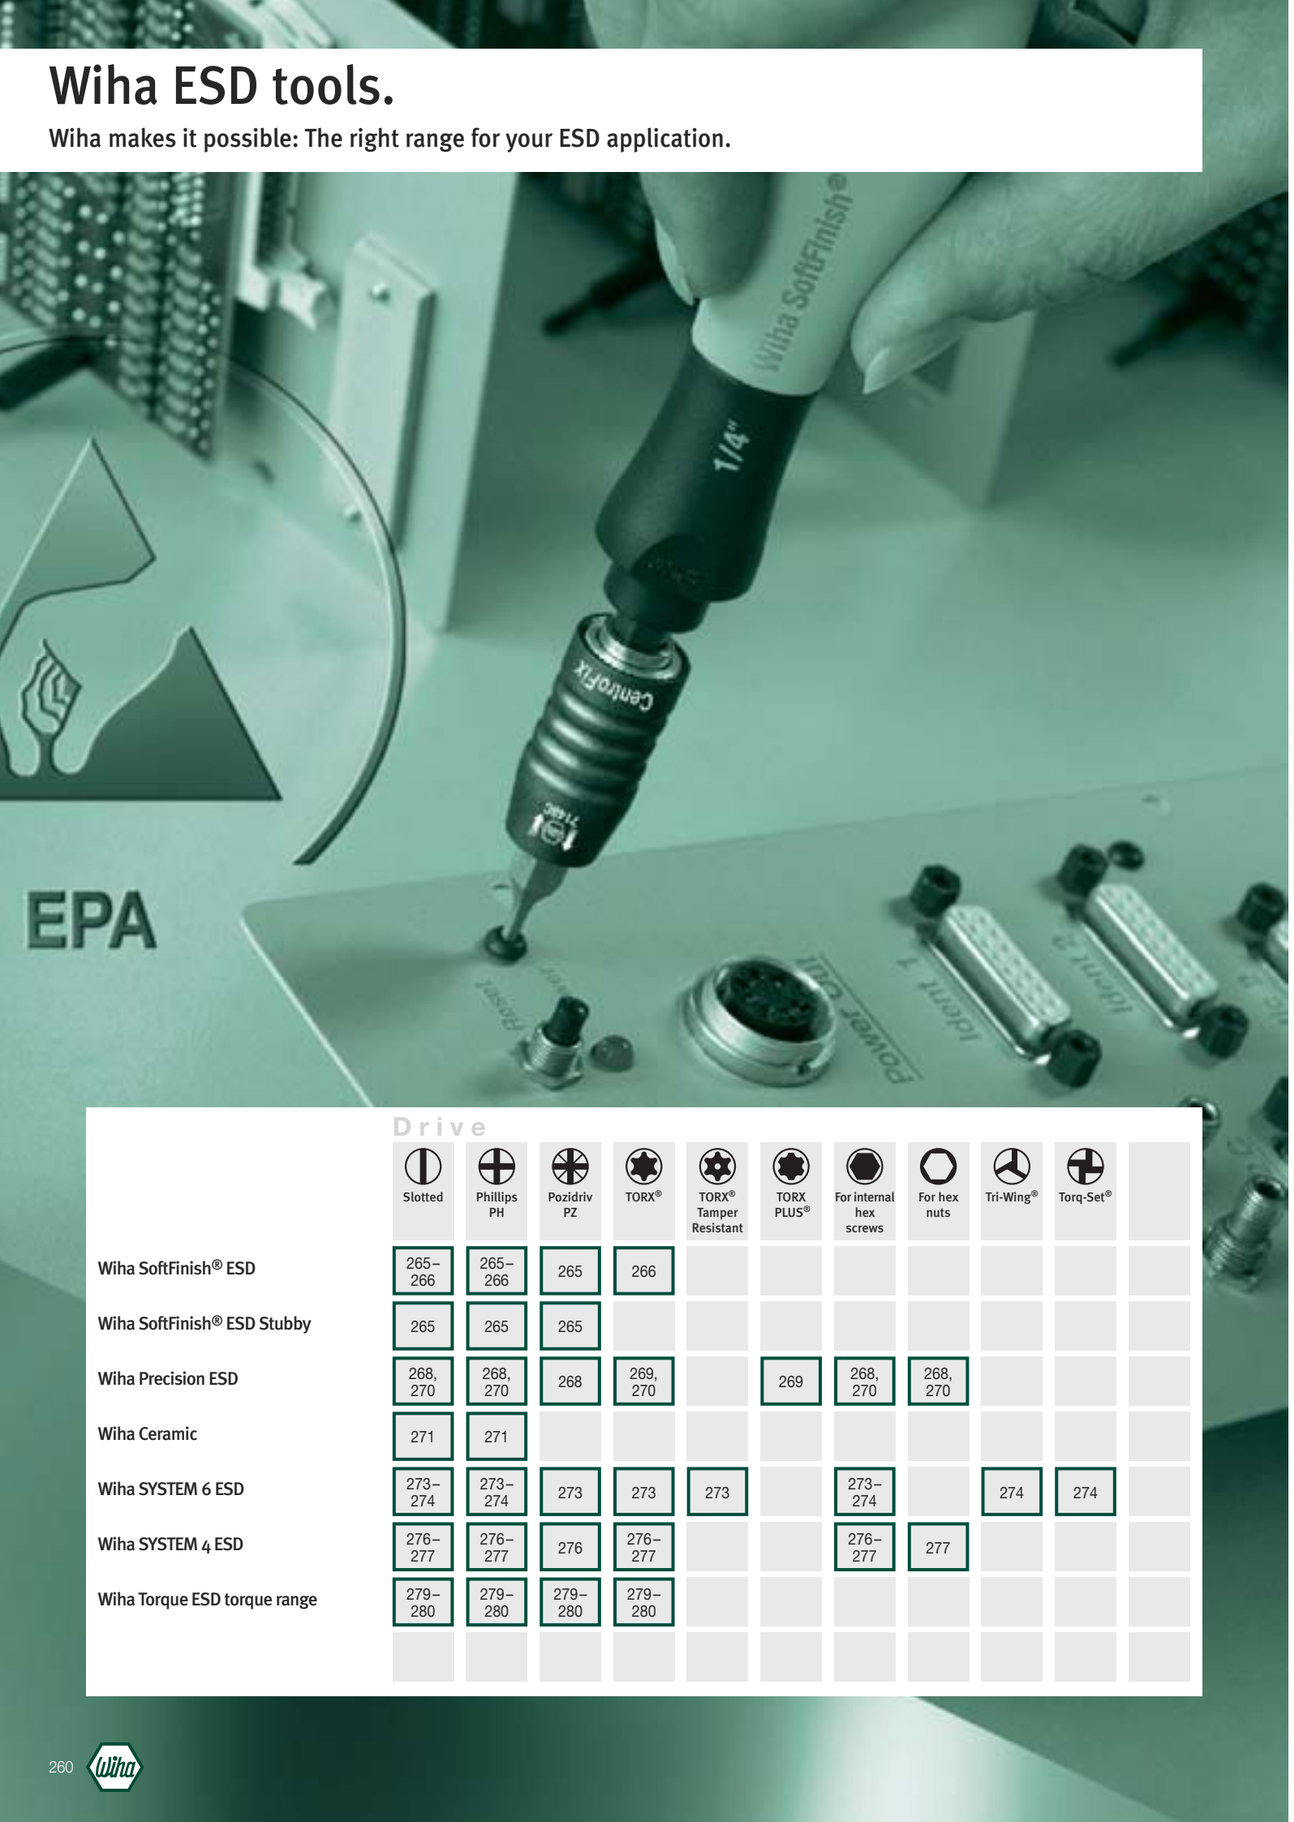

	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®	For internal hex screws	For hex nuts	Tri-Wing®	Torq-Set®
Wiha SoftFinish® ESD	265–266	265–266	265	266						
Wiha SoftFinish® ESD Stubby	265	265	265							
Wiha Precision ESD	268, 270	268, 270	268	269, 270		269	268, 270	268, 270		
Wiha Ceramic	271	271								
Wiha SYSTEM 6 ESD	273–274	273–274	273	273	273		273–274		274	274
Wiha SYSTEM 4 ESD	276–277	276–277	276	276–277			276–277	277		
Wiha Torque ESD torque range	279–280	279–280	279–280	279–280						

ESD assortment

Wiha ESD tools.
For use on electrostatically sensitive components. ..... 262 – 263

Wiha SoftFinish® ESD. ..... 264 – 266

Wiha SoftFinish® ESD Stubby. 265

Wiha Precision ESD.
The static dissipative precision screwdriver. ..... 267 – 270

Wiha Ceramic.
The non-static adjustment tool for clean rooms. 271

Wiha SYSTEM 6 ESD.
The compact allrounder. ..... 272 – 274

Wiha SYSTEM 4 ESD.
Ideal for precision work. ..... 275 – 277

Wiha Torque ESD torque range.
Precise and high repeat accuracy. ..... 278 – 280

Wiha ESD bit holder. 281

Wiha Professional ESD.
Precise in every detail. ..... 282 – 285

Wiha Professional ESD.
For high standards when it comes to precision and safety. ..... 286 – 289

Wiha dialMax ESD.
Dial calliper. 290

Wiha ESD application sets.
The right tool for any application. 291

Wiha ESD tools.

For use on electrostatically sensitive components.

EPA

Wiha ESD tools.

The most serious danger when working with electronic components is posed by electrostatic discharges. Because even with low discharge levels not perceived by people, sensitive structures within components can be damaged or destroyed. Those who wish to counteract this problem must take various aspects into account: ESD-safe workstations where electrostatic discharge is safely channelled to earth, electrostatically discharging shoes, workwear and an ESD armband with spiral cable that discharges voltage softly and safely via a large resistance (approx. 1 Meg-Ohm) from the operator to earth. A further precondition is that the tools used are also electrostatically safe.

Wiha's ESD tools are equipped with electrostatically discharging (dissipative) handles that have a defined surface resistance of 10^6 - 10^9 Ohm. That guarantees "soft discharging" within a set period of time and in a controlled and safe manner, so that sensitive components cannot be damaged. Wiha ESD tools are in accordance with the ESD standard IEC 61340-5-1.

Safety note:
Wiha ESD tools are non-insulating, and are therefore not suitable for work on live parts.

Our large ESD product range makes it easy for you to find the right tool for your ESD applications:

- **SoftFinish® ESD screwdrivers**
- **Precision ESD screwdrivers**
- **Ceramic tuning and adjusting screwdrivers**
- **SYSTEM 6 ESD 6 mm interchangeable blades range**
- **SYSTEM 4 ESD 4 mm interchangeable blades range**
- **Torque ESD torque screwdrivers**
- **ESD bit holders**
- **ESD pliers**
- **ESD electronics tweezers**
- **ESD dial gauge vernier callipers**

Wiha SoftFinish® ESD.

For use on electrostatically sensitive components.

EPA

Wiha SoftFinish® ESD screwdrivers have a surface resistance of 10^6 – 10^9 ohms.

The SoftFinish® ESD screwdrivers feature an impressive and ergonomic multi-component handle.

For work on electrostatically sensitive devices and assemblies, there is no better screwdriver than the Wiha SoftFinish® ESD, with integrated soft zone in the multi-component-handle. The dissipative handle with a surface resistance of 10^6 – 10^9 ohms discharges the electrostatic energy in a controlled manner to protect devices at risk from electrostatic discharge.

The ergonomic handle form was developed from the basis of extensive scientific investigations in cooperation with the Fraunhofer Institute. The result is a multi-component handle with a seamless outer form. Each hand size adapts perfectly to screwdriver, there are no pressure points while working and loading of the finger joints is minimised.

The hard handle core consists of impact resistant polypropylene. The thermoplastic elastomer handle provides for a pleasant, safe and slip-proof grip. The inseparable handle is connected to the core by a moulding process. The high-quality blade of chromevanadium- molybdenum steel is through hardened and mattechrome plated. The Wiha ChromTop® blade tip ensures a perfect fit in every screw head.

Wiha SoftFinish® ESD screwdrivers correspond to the internationally specified ESD standards IEC 61340-5-1.

Safety Notice:
Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.

Wiha SoftFinish® ESD.

- Dissipative handle designed to discharge uniformly, surface resistance 10^6 – 10^9 ohms
- Meets ESD standard IEC 61340-5-1
- Ergonomic SoftFinish® multicomponent handle guarantees comfortable work and optimised handling
- Blade made of high-quality CVM steel, through hardened and chrome plated
- Wiha ChromTop® blade tip ensure a perfect fit in every screw head

For slotted, Phillips and Pozidriv screws.

302ESD **SoftFinish® ESD slotted screwdriver. Dissipative handle, ESD-safe.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.							
08179 9	**2.5**	**75**	0.4	2.5	179	23	10
27150 3	**3.0**	**100**	0.4	3.0	204	23	10
27151 0	**4.0**	**100**	0.8	4.0	211	30	10
08182 9	**5.5**	**125**	1.0	5.5	236	30	10
08183 6	**6.5**	**150**	1.2	6.0	268	36	10

For slotted, Phillips and Pozidriv screws.

302ESD **SoftFinish® ESD slotted screwdriver Stubby. Dissipative handle, ESD-safe.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.							
32151 2	**4.0**	**25**	0.8	4.0	81	34	10
32152 9	**5.5**	**25**	1.0	5.5	81	34	10
32153 6	**6.5**	**25**	1.2	6.5	81	34	10



311ESD **SoftFinish® ESD Phillips screwdriver. Dissipative handle, ESD-safe.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
08184 3	**PH0**	**60**	3.0	164	23	10
08185 0	**PH1**	**80**	4.5	191	30	10
08186 7	**PH2**	**100**	6.0	218	36	10

311ESD **SoftFinish® ESD Phillips screwdriver Stubby. Dissipative handle, ESD-safe.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
32154 3	**PH1**	**25**	4.5	81	34	10
32155 0	**PH2**	**25**	6.0	81	34	10

313ESD **SoftFinish® ESD Pozidriv screwdriver. Dissipative handle, ESD-safe.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
26928 9	**PZ0**	**60**	3.0	164	23	10
26929 6	**PZ1**	**80**	4.5	191	30	10

313ESD **SoftFinish® ESD Pozidriv screwdriver Stubby. Dissipative handle, ESD-safe.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
32156 7	**PZ1**	**25**	4.5	81	34	10
32157 4	**PZ2**	**25**	6.0	81	34	10

Wiha SoftFinish® ESD.

For use on electrostatically sensitive components.

For TORX® screws. Bit holder.



362ESD **SoftFinish® ESD TORX® screwdriver.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
31432 3	**T3**	**60**	2.5	164	23	10
27148 0	**T4**	**60**	2.5	164	23	10
27641 6	**T5**	**60**	3.5	164	23	10
27149 7	**T6**	**60**	3.5	164	23	10
31901 4	**T7**	**60**	3.5	164	23	10
22436 3	**T8**	**60**	3.5	164	23	10
27145 9	**T9**	**60**	4.0	171	30	10
27144 2	**T10**	**80**	4.0	191	30	10
27146 6	**T15**	**80**	4.0	191	30	10
27147 3	**T20**	**100**	4.0	218	36	10

Sets.

302ESD HK5 01 **SoftFinish® ESD slotted/ Phillips screwdriver set, 5 pcs.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.	Series			
27252 4	**302ESD HK5 01**			1
	302ESD	3.0x100	4.0x100	
	311ESD	PH0x60	PH1x80	PH2x100

387ESD **ESD bit holder with handle, quick release holder, 1/4".**
Dissipative handle, ESD-safe.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Surface resistance 10^6 - 10^9 ohms.
Standards: Handle: IEC 61340-5-1.
Output: For bits according to DIN 3126, ISO1173 style C 6.3, E 6.3 and double bits.
Input: DIN 3126, ISO 1173, style E 6.3.
Bit holder: Stainless steel with retaining ring.
Application: For working on electrostatically sensitive components.
With integrated CentroFix bit holder, suitable for all bits and bit drills with the style C 6.3, E 6.3 or double bits.
Extra: True single-handed operation, extremely high retention force of bits (up to 20 kg) and virtually no play between bit and holder thanks to special closing and holding mechanism.

Order-No.					
32161 1	**1/4**	**38**	148	30	10

Safety Notice:
Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.

362ESD K5 **SoftFinish® ESD TORX® screwdriver set, 5 pcs.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.	Series			
27253 1	**362ESD K5**			1
	362ESD	T6x60	T8x60	T9x60
		T10x80	T15x80	

Wiha Precision ESD.

The static dissipative precision screwdriver.

EPA

Wiha ESD precision screwdrivers with the successful handle geometry. Due to the surface resistance of 10^6 – 10^9 ohms, defined electrostatic discharge is guaranteed.

The rotating cap with contact area makes incremental adjustment quick and easy.

Electrostatic discharges are a major problem, since even low voltages can damage sensitive components.

Various factors have to be considered in order to understand the problem. In ESD protection areas, the electrostatic charge is safely conducted to earth. Users have to wear the appropriate ESD footwear or grounded wrist strap. The tools used also have to be electrostatically protected.

The ESD screwdrivers from Wiha conform to the international ESD Standards IEC 61340-5-1. Due to the electrical surface resistance, 10^6 – 10^9 Ohm, defined electrostatic discharge is guaranteed. Thanks to the rotating cap, incremental adjusting is easy. The large handle enables powerful tightening and loosening of screws.

The dissipative Precision ESD – for working on electrostatically sensitive components.

Safety Notice:
Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.

Wiha Precision ESD.

- Dissipative handle designed to discharge uniformly, surface resistance 10^6 – 10^9 ohms
- Meets ESD standard IEC 61340-5-1
- Rotating cap with large surface for extra fast working
- Large handle end for powerful tightening and loosening screws
- Wiha ChromTop®-finish on tip for a perfect fit every time

Wiha Precision ESD.

The static dissipative precision screwdriver.

For slotted, Phillips and Pozidriv screws.

272 **Precision ESD slotted screwdriver.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.							
07634 4	1.5	40	0.25	2.0	120	12.5	10
07635 1	2.0	40	0.40	2.0	120	12.5	10
07636 8	2.5	50	0.40	2.5	145	13.0	10
07637 5	3.0	50	0.50	3.0	145	13.0	10
07638 2	3.5	60	0.60	3.5	170	14.0	10
07639 9	4.0	60	0.80	4.0	170	14.0	10

273 **Precision ESD Phillips screwdriver.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
28053 6	PH000	40	2.0	120	12.5	10
07640 5	PH00	40	2.0	120	12.5	10
07641 2	PH0	50	3.0	145	13.0	10
07642 9	PH1	60	4.0	170	14.0	10

274 **Precision ESD Pozidriv screwdriver.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
07643 6	PZ1	60	4.0	170	14	10

For hex nuts and hex socket screws.

275 **Precision ESD hex screwdriver.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.					
27707 9	0.7	40	120	12.5	10
27708 6	0.9	40	120	12.5	10
07644 3	1.3	40	120	12.5	10
07645 0	1.5	50	145	13.0	10
07646 7	2	50	145	13.0	10
07647 4	2.5	60	170	14.0	10
07648 1	3	60	170	14.0	10
32315 8	4	60	170	14.0	10

276 **Precision ESD ball end hex screwdriver.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.					
07649 8	1.5	50	145	13.0	10
07650 4	2	50	145	13.0	10
07651 1	2.5	60	170	14.0	10
07652 8	3	60	170	14.0	10

277 **Precision ESD hex nut driver.**
Dissipative handle, ESD-safe.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.							
32312 7	1.5	60	2.5	-	155	13.0	10
32313 4	2.0	60	2.9	-	155	13.0	10
07653 5	2.5	60	4.0	4.0	155	13.0	10
07654 2	3	60	5.0	5.0	155	13.0	10
07655 9	3.5	60	5.3	6.0	155	13.0	10
07656 6	4	60	5.5	6.0	155	13.0	10
32314 1	4.5	60	6.2	7.0	155	13.0	10
07657 3	5	60	6.8	7.0	155	13.0	10
07658 0	5.5	60	7.6	8.0	170	14.0	10

For TORX® screws.

278 **Precision ESD TORX® screwdriver.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.							
25676 0	T1	40	2.5	120	12.5	N E W	10
25677 7	T2	40	2.5	120	12.5	N E W	10
21256 8	T3	40	2.5	120	12.5		10
21255 1	T4	40	2.5	120	12.5		10
07659 7	T5	40	2.5	120	12.5		10
07660 3	T6	40	2.5	120	12.5		10
07661 0	T7	40	2.5	120	12.5		10
07662 7	T8	40	2.5	120	12.5		10
07663 4	T9	50	3.0	145	13.0		10
07664 1	T10	50	3.0	145	13.0		10
07665 8	T15	60	3.5	170	14.0		10
07666 5	T20	60	4.0	170	14.0		10

278R **Precision ESD TORX® MagicSpring® screwdriver.**
Dissipative handle, ESD-safe.
Retaining spring holds TORX® screws in place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
27748 2	T6	40	2.5	120	12.5	10
27749 9	T7	40	2.5	120	12.5	10
27759 8	T8	40	2.5	120	12.5	10
27750 5	T9	50	3.0	145	13.0	10
27751 2	T10	50	3.0	145	13.0	10
27752 9	T15	60	3.5	170	14.0	10

For TORX PLUS® screws. Chip lifter.

278IP **Precision ESD TORX PLUS® screwdriver.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.						
28198 4	4IP	40	2.5	120	12.5	10
27761 1	5IP	40	2.5	120	12.5	10
27762 8	6IP	40	2.5	120	12.5	10
27763 5	7IP	40	2.5	120	12.5	10
27764 2	8IP	40	2.5	120	12.5	10
27765 9	9IP	50	3.0	145	13.0	10
27766 6	10IP	50	3.0	145	13.0	10
27767 3	15IP	60	3.5	170	14.0	10

279-10 **Precision ESD chip lifter.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Handle: Precision handle, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For lifting tight parts on circuit boards.

Order-No.					
07667 2	3.5	50	145	13.0	10

Wiha Info

Wiha MagicSpring®:

stainless steel spring
reliably holds TORX® or
TORX PLUS® screws in place.

Wiha Precision ESD.

The static dissipative precision screwdriver.

ESD screwdriver sets.

272 K6 **Precision ESD slotted/ Phillips screwdriver set, 6 pcs.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.
Extra: Practical plastic rack with hanging holes.
In plastic box, can be opened and positioned on workbench.

Order-No.	Series					
08463 9	272 K6					1
	272	1.5x40	2.0x40	2.5x50	3.0x50	
	273	PH00x40	PH0x50			

ESD screwdriver sets.

277 K6 **Precision ESD hex nut driver set, 6 pcs.**
Dissipative handle, ESD-safe.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.
Extra: Practical plastic rack with hanging holes.
In plastic box, can be opened and positioned on workbench.

Order-No.	Series					
32279 3	277 K6					1
	277	2.5x60	3x60	3.5x60	4x60	
		5x60	5.5x60			

275 K6 **Precision ESD hex screwdriver set, 6 pcs.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.
Extra: Practical plastic rack with hanging holes.
In plastic box, can be opened and positioned on workbench.

Order-No.	Series					
32278 6	275 K6					1
	275	0.9x40	1.3x40	1.5x50	2x50	
		2.5x60	3x60			

278 K6 **Precision ESD TORX® screwdriver set, 6 pcs.**
Dissipative handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.
Extra: Practical plastic rack with hanging holes.
In plastic box, can be opened and positioned on workbench.

Order-No.	Series					
26919 7	278 K6					1
	278	T5x40	T6x40	T7x40	T8x40	
		T10x50	T15x60			

Wiha Ceramic.

The non-static adjustment tool for clean rooms.

EPA

iF product design award 1996

The Wiha Ceramic precision screwdrivers with blades made of high-tech zirconium ceramic are the perfect tools for all applications in clean rooms and for delicate electrostatic components. In these areas there are high requirements in terms of eddy-current losses.

The ceramic blades and handles are completely antimagnetic and anti-static. This is a fundamental requirement for working with highly sensitive components, such as capacitors, solenoids and various resistances. The ceramic blades are resistant to mechanical wear, acid corrosion and thermal shock stress. Wiha Ceramic screwdrivers are available with slotted and Phillips tips, as well as in a set.

With centring head and quick-turning zone for optimum handling.

The ceramic blade and handle are completely anti-magnetic and anti-static.

Wiha Ceramic.

- Ideal for adjusting electrical components
- Suitable for working in clean rooms
- Anti-static and anti-magnetic handle and blade
- Rotating cap for easy working
- Resistant to mechanical wear, thermal shock stress and acidic corrosion

For slotted and Phillips screws.

270 **Ceramic slotted screwdriver.**
Non-static adjustment tool with ceramic blade.

Blade: Made of high-quality special ceramic, anti-static/ anti-magnetic.
Handle: Wiha Proturn® Precision handle with rotating cap, anti-static/anti-magnetic.
Application: Specially designed for tuning and adjusting high frequency devices, suited to cleanrooms.

Order-No.							
02163 4	0.9	15	0.35	1.75	94.5	12.5	10
02164 1	1.3	15	0.35	1.75	94.5	12.5	10
02167 2	1.8	15	0.35	1.75	94.5	12.5	10
02168 9	2.6	15	0.35	2.6	94.5	12.5	10

271 **Ceramic Phillips screwdriver.**
Non-static adjustment tool with ceramic blade.

Order-No.						
02169 6	PH0	15	2.6	94.5	12.5	10

Ceramic screwdriver set.

270 HK3 **Ceramic slotted/ Phillips screwdriver set, 3 pcs.**
Non-static adjustment tool with ceramic blade.

Blade: Made of high-quality special ceramic, anti-static/anti-magnetic.
Handle: Wiha Proturn® Precision handle with rotating cap, anti-static/ anti-magnetic.
Application: Specially designed for tuning and adjusting high frequency devices, suited to cleanrooms.
Extra: Delivered in practical plastic box.

Order-No.	Series		
02171 9	270 HK3		1
	270	0.9x15	2.6x15
	271	PH0x15	

Wiha SYSTEM 6 ESD.

The compact allrounder.

Colour-coded ChromTop® tips for maximum clarity.

Are you looking for a versatile and space-saving system for your toolbox or for on the road?
Then our **SYSTEM 6** exchange tools with 6 mm reversible blades and suitable handles are exactly the right solution for you.

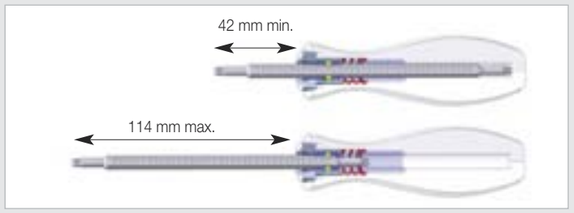

With the SoftFinish® telescopic handle, the blade length can be adjusted from 42 – 114 mm.

Safety Notice:
Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.

Wiha SYSTEM 6 ESD.

- Flexible, versatile reversible-blade system in industrial quality
- Dissipative handle designed to discharge uniformly, surface resistance 10^6 – 10^9 ohms
- Meets ESD standard IEC 61340-5-1
- Ergonomic SoftFinish® multicomponent handle guarantees comfortable work and optimised handling
- Colour-coded blades made of high-quality, tough chrome-vanadium-molybdenum steel, through-hardened, chrome-plated
- Wiha ChromTop® tips ensure a perfect fit every time

SYSTEM 6 ESD handle. SYSTEM 6 reversible blades.

284ESD **SYSTEM 6 SoftFinish®-telescopic ESD handle.**
Dissipative handle, ESD-safe.

Handle: Ergonomic multi-component handle with roll-off protection.
With 6 mm hex retainer. Enables adjustable blade lengths from 42 - 114 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For working on electrostatically sensitive components.

Order-No.				
31496 5	**6.0**	**115**	36	5

284 **SYSTEM 6 slotted reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.							
27627 0	**3.5**	**4.5**	0.6	0.8	150	6.0	5
00629 7	**4.0**	**6.0**	0.8	1.0	150	6.0	5
00630 3	**5.5**	**6.5**	1.0	1.2	150	6.0	5

284 **SYSTEM 6 combined slotted-Phillips reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.						
00665 5	**4.0**	**PH1**	0.8	150	6.0	5
00666 2	**6.0**	**PH2**	1.0	150	6.0	5
00667 9	**6.5**	**PH3**	1.2	150	6.0	5

284 **SYSTEM 6 Phillips reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.					
00631 0	**PH1**	**PH2**	150	6.0	5
27628 7	**PH2**	**PH3**	150	6.0	5

SYSTEM 6 reversible blades.

284 **SYSTEM 6 Pozidriv reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.					
00632 7	**PZ1**	**PZ2**	150	6.0	5
27629 4	**PZ2**	**PZ3**	150	6.0	5

284 **SYSTEM 6 combined ball end hex - hex reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.					
00635 8	**2.5**	**2.5**	150	6.0	5
00636 5	**3**	**3**	150	6.0	5
00637 2	**4**	**4**	150	6.0	5
00638 9	**5**	**5**	150	6.0	5
00639 6	**6**	**6**	150	6.0	5

284 **SYSTEM 6 TORX® reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.					
00654 9	**T6**	**T8**	150	6.0	5
00655 6	**T7**	**T9**	150	6.0	5
00656 3	**T10**	**T15**	150	6.0	5
00657 0	**T20**	**T25**	150	6.0	5
00658 7	**T30**	**T40**	150	6.0	5

284 **SYSTEM 6 TORX® Tamper Resistant reversible blade.**
For TORX® screws with locking pin.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.
With borehole in the blade tip.

Order-No.					
27630 0	**T6H**	**T8H**	150	6.0	5
27631 7	**T7H**	**T9H**	150	6.0	5
27632 4	**T10H**	**T15H**	150	6.0	5
27633 1	**T20H**	**T25H**	150	6.0	5
27634 8	**T30H**	**T40H**	150	6.0	5

Wiha SYSTEM 6 ESD.

The compact allrounder.

SYSTEM 6 reversible blades.

284 **SYSTEM 6 Tri-Wing® reversible blade.**
For Tri-Wing® security screws.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.					
27637 9	TW0	TW1	150	6.0	5
27638 6	TW2	TW3	150	6.0	5
27639 3	TW4	TW5	150	6.0	5

284 **SYSTEM 6 Torq-Set® reversible blade.**
For Torq-Set® security screws.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.					
27635 5	TS2	TS4	150	6.0	5
27636 2	TS6	TS8	150	6.0	5

7802 **SYSTEM 6 bit holder.**
Suitable for C 6.3 and E 6.3 (1/4") bits.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Bit retainer made of stainless steel with integrated permanent magnet.

Order-No.					
03882 3	1/4	164	6.0	10	5

7803 **SYSTEM 6 adapter blade.**
Suitable for 1/4" square sockets.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
1/4" square drive with ball retainer.

Order-No.				
03883 0	1/4	164	6.0	5

U109 00 **SYSTEM 6 extension blade.**
Suitable for blades.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Extends all SYSTEM 6 blades up to 100 mm.

Order-No.					
08921 4	6.0	166	6.0	11	5

Sets.

ESD-safe, telescopic

284ESD T6 01 **SYSTEM 6 ESD set of reversible blades, 6 pcs.**
Slotted/ Phillips/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.
Blade length is adjustable from 42 - 114 mm.

Handle: SYSTEM 6 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10^6 - 10^9 ohms.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.

Extra: Robust roll-up bag allows space-saving storage of tools.

Order-No.	Series			
31497 2	284ESD T6 01			1
	284ESD	SYSTEM 6 SoftFinish®-telescopic ESD handle		
	284	3.5 - 4.5	4.0 - 6.0	5.5 - 6.5
	284	PH1 - PH2		
	284	5 - 5		

Press sleeve:
=> Blade locking is released

Press and hold down sleeve:
=> Set desired blade length

Release sleeve:
=> Blade is held securely

Wiha SYSTEM 4 ESD.

Ideal for precision work.

Colour-coded ChromTop® tips for maximum clarity.

The **SYSTEM 4** from Wiha is an exchange tool system that manages to win over every user with its versatility and quality. Whether for slotted, Phillips, TORX® or hex screws, users always find the right model in the extensive 4 mm blade sortiment. All reversible blades are manufactured from high quality chrome-vanadium molybdenum steel, meticulously hardened and chrome-plated. That guarantees an extra long service life.

Convincing variety and quality. SYSTEM 4 – a real multi-tasker.

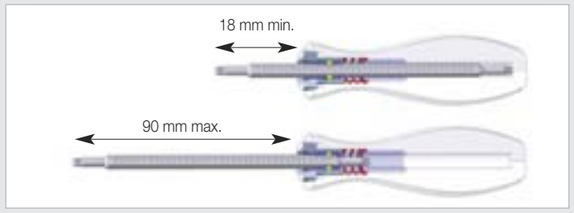

With the SoftFinish® telescopic handle, the blade length can be adjusted from 18 – 90 mm.

Wiha SYSTEM 4 ESD.

- Flexible, versatile reversible precision blade system
- Dissipative handle designed to discharge uniformly, surface resistance 10^6 - 10^9 ohms
- Meets ESD standard IEC 61340-5-1
- Ergonomic SoftFinish® multicomponent handle guarantees comfortable work and optimised handling
- Colour-coded blades made of high-quality, tough chrome-vanadium-molybdenum steel, through-hardened, chrome-plated
- Wiha ChromTop® tips ensure a perfect fit every time

Wiha SYSTEM 4 ESD.

Ideal for precision work.

SYSTEM 4 ESD handle and reversible blades.

2691ESD **SYSTEM 4 SoftFinish®-telescopic ESD handle.**
Dissipative handle, ESD-safe.

Handle: Ergonomic multi-component handle with roll-off protection.
With 4 mm hex retainer for all SYSTEM 4 blades.
Enables adjustable blade lengths from 18 - 90 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Surface resistance 10^6 - 10^9 ohms.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.				
31498 9	4.0	105	23	10

SYSTEM 4 ESD reversible blades.

269 **SYSTEM 4 Phillips reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.					
00579 5	PH000	PH00	120	4.0	5
00580 1	PH0	PH1	120	4.0	5

269 **SYSTEM 4 Pozidriv reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.					
03186 2	PZ0	PZ1	120	4.0	5

269 **SYSTEM 4 slotted reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.							
00576 4	1.5	3.0	0.25	0.5	120	4.0	5
00577 1	2.0	3.5	0.4	0.6	120	4.0	5
00578 8	2.5	4.0	0.4	0.8	120	4.0	5

269 **SYSTEM 4 TORX® reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.				
26122 1	T1	T2	120	4.0	5
26123 8	T3	T4	120	4.0	5
26124 5	T5	T6	120	4.0	5
00597 9	T6	T8	120	4.0	5
00598 6	T7	T9	120	4.0	5
00599 3	T10	T15	120	4.0	5
00600 6	T15	T20	120	4.0	5

269 **SYSTEM 4 slotted Phillips reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order-No.						
00601 3	2.0	PH00	0.4	120	4.0	5
00602 0	3.0	PH0	0.5	120	4.0	5
00603 7	4.0	PH1	0.8	120	4.0	5

Safety Notice:
Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.

269 **SYSTEM 4 combined ball end hex - hex reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Extra: The ball end enables the user to work at angles up to 25°.

Order-No.					
00582 5	1.3	1.3	120	4.0	5
00583 2	1.5	1.5	120	4.0	5
00584 9	2	2	120	4.0	5
00585 6	2.5	2.5	120	4.0	5
00586 3	3	3	120	4.0	5
00587 0	4	4	120	4.0	5

SYSTEM 4 bit holder/nut driver blades and set.

U759 00 **SYSTEM 4 bit holder.**
Suitable for C 4 (4 mm) bits.

Blade: Chrome-vanadium steel, through hardened, electro-plated.

Order-No.					
09195 8	4.0	135	4.0	9	1

269 **SYSTEM 4 nut driver.**
For hex nuts.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Application: For hex nuts.

Order-No.					
00588 7	1.5	1.8	125	4.0	5
00589 4	2	2.5	125	4.0	5
00590 0	3	-	125	4.0	5
00591 7	3.2	-	125	4.0	5
00592 4	3.5	-	125	4.0	5
00593 1	4	-	125	4.0	5
00594 8	4.5	-	125	4.0	5
00595 5	5	-	125	4.0	5
00596 2	5.5	-	125	4.0	5

ESD-safe, telescopic

2691 T11 ESD **SYSTEM 4 ESD reversible blades set, 11 pcs.**
Slotted/ Phillips/ TORX®/ hex/ ball end hex.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.
Blade length is adjustable from 18 - 90 mm.

Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10^6 - 10^9 ohms.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.

Extra: In a roll-up pouch made of ESD-safe material.

Order-No.	Series			
31499 6	2691 T11 ESD			5
	2691ESD	SYSTEM 4 SoftFinish®-telescopic ESD handle		
	269	1.5 - 3.0	2.0 - 3.5	2.5 - 4.0
	269	PH000 - PH00	PH0 - PH1	
	269	T6 - T8	T7 - T9	
	269	1.5 - 1.5	2 - 2	2.5 - 2.5

Sets.

ESD-safe, telescopic

7000 EB16 ESD **SYSTEM 4 ESD bit set, 16 pcs.**
Mixed sets.

Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10^6 - 10^9 ohms.
Enables adjustable bit holder blade length.

Standards: DIN 3126, ISO 1173, style C 4.
IEC 61340-5-1.

Application: Bit set suitable for smallest screws with electronic components.
Flexible working via adjustable blade length and rapid replacement of bit inserts.

Order-No.	Series				
33503 8	7000 EB16 ESD				1
	2691ESD	SYSTEM 4 SoftFinish®-telescopic ESD handle			
	U759 00	SYSTEM 4 bit holder			
	U 750	1x2.0	1x3.0		
	U 751	1xPH000	1xPH00	1xPH0	1xPH1
	U 757	1xT3	1xT4	1xT5	1xT6	1xT8
	U 753	1x0.9	1x1.3	1x1.5	

ESD-safe, telescopic

7000 EB26 ESD **SYSTEM 4 ESD bit set, 26 pcs.**
Mixed sets.

Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10^6 - 10^9 ohms.
Enables adjustable bit holder blade length.

Standards: DIN 3126, ISO 1173, style C 4. IEC 61340-5-1.

Application: Universal set for especially small screws with electronic components.
Flexible working via adjustable blade length and rapid replacement of bit inserts.

Order-No.	Series				
33848 0	7000 EB26 ESD				1
	2691ESD	SYSTEM 4 SoftFinish®-telescopic ESD handle			
	U759 00	SYSTEM 4 bit holder			
	U 750	1x1.5	1x2.0	1x3.0	1x4.0
	U 751	1xPH000	1xPH00	1xPH0	1xPH1
	U 757	1xT3	1xT4	1xT5	1xT6
		1xT7	1xT8	1xT9	1xT10
	U 753	1x0.7	1x0.9	1x1.3	1x1.5
		1x2.0	1x2.5	1x3.0	1x4.0

Wiha Torque ESD torque range.

EPA

Wiha SoftFinish® ESD screwdrivers have a surface resistance of 10^6 – 10^9 ohms.

Wiha TorqueVario®-S ESD with integrated scale.

Specially designed for applications on electrostatic sensitive components and devices that may be damaged by electrostatic fields or discharges. The dissipative handle and blade coating, with a surface resistance of 10^6 – 10^9 Ohms, controls electrostatic energy discharge. Four models cover torque ranges from 0.1 Nm up to 5.0 Nm.

...in electronic assemblies and ESD protected zones, where electrostatic sensitive components and devices must be grounded, the TorqueVario®-S ESD should be used.

Safety Notice:
Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.

Wiha Torque ESD torque range.

- Dissipative handle designed to discharge uniformly, surface resistance 10^6 – 10^9 Ohm
- Meets ESD standard IEC 61340-5-1
- Ergonomic SoftFinish® multicomponent handle guarantees comfortable work and optimised handling
- Ergonomic handle sizes that are proportional to the torque ranges
- Each tool is individually tested and marked with an identification number
- Clearly audible and perceptible click on attaining the pre-set torque
- Interchangeable blades are made from high quality-chrome- vanadium steel
- Universal bit holder for all C 6.3 and E 6.3 bits, adapter blade for 1/4" nuts
- Fulfills all accuracy requirements as defined by EN ISO 6789, BS EN 26789 and ASME B 107.14M
- Torque accuracy ± 6% of the pre-set scale value
- Delivered with factory calibration certificate

TorqueVario®-S ESD with scale.

with scale, incl. Torque-Setter

±6%

2882 **TorqueVario®-S ESD torque screwdriver.**
Torque value can be set via window scale.
Automatic release.

Handle: Torque infinitely adjustable with Torque-Setter setting tool (also supplied). Ergonomic multi-component handle, made of ESD-safe dissipative material. Handle sizes proportioned to optimise torque setting. Audible and perceptible click when the pre-set torque has been attained. Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1. EN ISO 6798, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards (•model 0.1-0.6 Nm = ±10%).
Application: For ESD applications where recommended torque settings are important. Use in combination with a Wiha Torque ESD interchangeable blade.
Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order-No.	Nm				
26865 7	**0.1-0.6•**	**4**	127	23	1
26629 5	**0.4-1.0**	**4**	127	23	1
26866 4	**0.8-2.0**	**4**	131	30	1
30495 9	**1.0-5.0**	**4**	138	36	1

• Accuracy ±10%

TorqueVario®-S ESD set.

with scale

2882 S10 **TorqueVario®-S ESD torque screwdriver set, 13 pcs.**
Torque value can be set via window scale.
With bit universal holder and 10 Phillips/ Pozidriv/ TORX®/ hex Standard bits.

Handle: Model 0.8-2.0 Nm. Torque infinitely adjustable with Torque-Setter setting tool (also supplied). Ergonomic multi-component handle, made of ESD-safe dissipative material.
Standards: IEC 61340-5-1. EN ISO 6798, BS EN 26789, ASME B107.14M.
Accuracy: ±6%, traceable to national standards.
Application: For ESD applications where recommended torque settings are important.
Extra: Delivered in robust metal box, incl. factory calibration certificate.

Order-No.	Series				
27687 4	**2882 S10**				1
	2882	TorqueVario®-S ESD torque screwdriver, Model 0.8-2.0 Nm			
	2889	Torque ESD bit universal holder			
	288-900	Torque-Setter ESD			
	7010 Z	4.0x25	5.5x25		
	7011 Z	PH0x25	PH1x25		
	7012 Z	PZ0x25	PZ1x25		
	7015 Z	T7x25	T8x25	T9x25	T10x25

288-900 **Torque-Setter ESD.**
Setting tool for variable Torque ESD screwdrivers.
Included in every torque ESD screwdriver delivery.

Blade: Octagonal blade, through hardened, zinc-plated.
Handle: Made of static dissipative plastic material.
Standards: IEC 61340-5-1.

Order-No.			
27279 1	**80**	**150**	1

Wiha Torque ESD screwdrivers.

Torque ESD interchangeable blades.

2889 **Torque ESD slotted interchangeable blade.**
For Wiha ESD torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Moulded with static dissipative, black plastic material.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1, DIN ISO 2380.
Application: For ESD applications where recommended torque settings are important.

Order-No.						max. Nm	
26869 5	**0.25**	**1.5**	4	175	42	0.15	10
26870 1	**0.4**	**2.0**	4	175	42	0.4	10
26871 8	**0.5**	**3.0**	4	175	42	0.6	10
26872 5	**0.6**	**3.5**	4	175	42	1.1	10
26873 2	**0.8**	**4.0**	4	175	42	2.5	10

2889 **Torque ESD Phillips interchangeable blade.**
For Wiha ESD torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Moulded with static dissipative, black plastic material.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1, DIN ISO 8764.
Application: For ESD applications where recommended torque settings are important.

Order-No.					max. Nm	
26877 0	**PH000**	**4**	175	42	0.4	10
26876 3	**PH00**	**4**	175	42	0.4	10
26875 6	**PH0**	**4**	175	42	0.9	10
26878 7	**PH1**	**4**	175	42	3.8	10

2889 **Torque ESD Pozidriv interchangeable blade.**
For Wiha ESD torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Moulded with static dissipative, black plastic material.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1, DIN ISO 8764.
Application: For ESD applications where recommended torque settings are important.

Order-No.					max. Nm	
26879 4	**PZ0**	**4**	175	42	0.9	10
26880 0	**PZ1**	**4**	175	42	3.8	10

Torque ESD interchangeable blades.

2889 **Torque ESD TORX® interchangeable blade.**
For Wiha ESD torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.
Moulded with static dissipative, black plastic material.
Surface resistance 10^6 - 10^9 ohms.
Standards: IEC 61340-5-1.
Application: For ESD applications where recommended torque settings are important.
Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.					max. Nm	
26881 7	**T5**	**4**	175	42	0.4	10
26882 4	**T6**	**4**	175	42	0.6	10
26868 8	**T7**	**4**	175	42	0.9	10
26883 1	**T8**	**4**	175	42	1.3	10
26884 8	**T9**	**4**	175	42	2.5	10
26885 5	**T10**	**4**	175	42	3.8	10

2889 **Torque ESD bit universal holder.**
For Wiha ESD torque screwdrivers.
Suitable for C 6.3 and E 6.3 (1/4") bits.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Surface resistance 10^6 - 10^9 ohms.
Sleeve: Made of stainless steel, moulded with dissipative, black plastic material.
Application: For ESD applications where recommended torque settings are important.

Order-No.				
27711 6	**1/4**	**4**	162	11	10

Wiha ESD bit holder.

EPA

The Wiha ESD bit holder handles have a surface resistance of 10^6 – 10^9 ohms.

The Wiha SoftFinish® ESD with integrated soft zone is eminently suitable for working with electrostatically endangered construction components in ESD protected zones. The dissipative handles with a surface resistance of 10^6 – 10^9 ohms conduct electrostatic energy away from endangered electronic components in a controlled and safe way.

Wiha ESD bit holder.

- Dissipative handle designed to discharge uniformly, surface resistance 10^6 – 10^9 ohms
- Meets ESD standard IEC 61340-5-1
- Ergonomic SoftFinish® multicomponent handle guarantees comfortable work and optimised handling

ESD bit holder with retaining ring.

281-01ESD **ESD bit holder with handle, retaining ring, 1/4".**
Dissipative handle, ESD-safe.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Surface resistance 10^6 - 10^9 ohms.
Universal use for all bits.
Standards: Handle: IEC 61340-5-1.
Output: For bits according to DIN 3126, ISO1173 style C 6.3.
Bit holder: Stainless steel with retaining ring.
Application: For working on electrostatically sensitive components, especially in tight places.

Order-No.				
32484 1	**1/4**	**57**	34	10

ESD bit holder with quick release holder.

387ESD **ESD bit holder with handle, quick release holder, 1/4".**
Dissipative handle, ESD-safe.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Surface resistance 10^6 - 10^9 ohms.
Standards: Handle: IEC 61340-5-1.
Output: For bits according to DIN 3126, ISO1173 style C 6.3, E 6.3 and double bits.
Input: DIN 3126, ISO 1173, style E 6.3.
Bit holder: Stainless steel with retaining ring.
Application: For working on electrostatically sensitive components.
With integrated CentroFix bit holder, suitable for all bits and bit drills with the style C 6.3, E 6.3 or double bits.
Extra: True single-handed operation, extremely high retention force of bits (up to 20 kg) and virtually no play between bit and holder thanks to special closing and holding mechanism.

Order-No.					
32161 1	**1/4**	**38**	148	30	10

Wiha Professional ESD.

Precise in every detail.

EPA

Wiha Professional ESD is ideal for electronics professionals needing precise, robust pliers.

The formula for success for the pliers series is as simple as it is clever: uncompromising sharpness and hardness for flush cutting, and pleasant comfort with the handle for firm, fatigue-free grasping, holding and cutting.

The Professional ESD diagonal cutter with a broad, pointed head cut soft wires flush.

The Professional ESD needle-nose pliers are predominantly used for fine gripping and bending work.

Suitable for work at ESD workstations in accordance with IEC 61340-5-1.

Safety Notice:
Wiha Professional ESD pliers are noninsulated, therefore not suitable for working on live parts.

Wiha Professional ESD.

- **ESD safe**
  Suitable for work at ESD workstations in accordance with IEC 61340-5-1, surface resistance 10^6 – 10^9 ohms
- **Anti-static**
  Unique: all handle components are discharging (dissipative)
- **Precise**
  Box joint, resistant against twisting
- **As hard as steel**
  Pliers head drop forged from high quality steels
- **Robust and durable**
  Cutting edges are individually tempered and additionally induction hardened to approx. 64 HRC; joints are extremely wear resistant and withstand high stresses, with high-quality riveting
- **Ergonomic**
  Extra wide handle backs, with soft and hard zones perfectly distributed across the handle
- **Attractive**
  Appealing design with finely polished head

Diagonal cutter, narrow, pointed shape.

Z 40 1 04 **Diagonal cutter Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Narrow, pointed head.
Design: Bevelled cutting edges, individually tested, also appropriate for thin, hard wires.
Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC.
With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For cutting different hardnesses of wires in places which are difficult to access.

Order-No.	mm	″	○	○	○		
26808 4	**115**	**4 ½**	1.0	0.6	0.3	60	5

Z 40 4 04 **Diagonal cutter Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Extra narrow, short head for working in particularly restricted spaces.
Design: Cutting edge almost without bevel for virtually flush cutting, individually tested.
Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC.
With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For virtually flush cutting copper wire in flat places which are difficult to reach.

Order-No.	mm	″	○		
26814 5	**115**	**4 ½**	1.0	60	5

Z 40 3 04 **Diagonal cutter Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Narrow, pointed head.
Design: Blade without facet, individually inspected, suited to thin, tough wire.
Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC.
With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For absolutely flush cutting of copper wire in hard-to-reach places.

Order-No.	mm	″	○		
33521 2	**115**	**4 ½**	1.0	60	5

Diagonal cutter, broad, pointed shape.

Z 41 1 04 **Diagonal cutter Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Wide, pointed head.
Design: Bevelled cutting edges, also appropriate for hard wires.
Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC.
With opening spring.
Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: All round electronic diagonal cutter for cutting wires of different hardnesses.

Order-No.	mm	″	○	○	○		
26816 9	**115**	**4 ½**	1.4	1.0	0.4	60	5

Z 41 3 04 **Diagonal cutter Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Wide, pointed head.
Design: Cutting edge without bevel for absolute flush cutting.
Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC.
With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For absolutely flush cutting of copper wire.

Order-No.	mm	″	○		
26821 3	**115**	**4 ½**	1.0	60	5

Z 41 4 04 **Diagonal cutters Professional ESD with wire trapping spring.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Wide, pointed head.
Design: With fixture for trapping ends of wires which have been cut off.
Cutting edge with full flush cutter function for virtually flush cutting.
Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC.
With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For virtually flush cutting copper wire, function for trapping cut off wire.

Order-No.	mm	″	○		
26822 0	**115**	**4 ½**	1.2	60	5

Wiha Professional ESD.

Precise in every detail.

Diagonal cutter, semi-circular shape.



Z 43 1 04 **Diagonal cutter Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Narrow, semi-circular head.
Design: Cutting edge with full flush cutter function for virtually flush cutting. Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For virtually flush cutting of copper wire in places which are difficult to access.

Order-No.	mm	"	○		
26826 8	**115**	**4 ½**	1.2	60	5



Z 44 1 04 **Diagonal cutter Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Wide, semi-circular head.
Design: Bevelled cutting edges, also appropriate for thin, hard wires. Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: All round electronic diagonal cutter for cutting wires of different hardnesses.

Order-No.	mm	"	○	○	○		
26831 2	**115**	**4 ½**	1.4	1.0	0.4	60	5



Z 44 3 04 **Diagonal cutter Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Wide, semi-circular head.
Design: Cutting edge with full flush cutter function for virtually flush cutting. Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For virtually flush cutting of soft wires.

Order-No.	mm	"	○		
26832 9	**115**	**4 ½**	1.2	60	5

Oblique end cutters.



Z 46 1 04 **Oblique end cutting nippers Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Wide head, angled at 29°.
Design: Cutting edge with full flush cutter function for virtually flush cutting. Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For virtually flush cutting of soft wires. Can be used horizontally and virtically.

Order-No.	mm	"	○		
26835 0	**115**	**4 ½**	1.2	78	5



Z 46 4 04 **Oblique end cutting nippers Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Extra narrow head. Cutting edges angled at 40°.
Design: Cutting edge with full flush cutter function for virtually flush cutting. Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For virtually flush cutting thin, soft wires in places which are particularly difficult to access.

Order-No.	mm	"	○		
26838 1	**110**	**4 ¼**	0.6	42	5



Z 47 1 04 **End cutting nippers Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Extra narrow, slim shape.
Design: Cutting edge with full flush cutter function for virtually flush cutting. Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For virtually flush cutting of soft wires in places which are particularly difficult to access.

Order-No.	mm	"	○		
26839 8	**110**	**4 ¼**	0.6	65	5

End cutters and gripping pliers.



Z 47 2 04 **End cutting nippers Professional ESD.**

Standards: DIN ISO 9654. IEC 61340-5-1.
Head shape: Wide head.
Design: Cutting edge with full flush cutter function for virtually flush cutting. Maximum service life of cutting edge achieved through additional inductive hardening to approx. 64 HRC. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: High alloy carbon steel C 60.
Application: For frontal, virtually flush cutting of thicker, soft wires.

Order-No.	mm	"	○		
26840 4	**115**	**4 ½**	1.4	65	5



Z 36 0 04 **Needle nose pliers Professional ESD.**

Standards: DIN ISO 9655. IEC 61340-5-1.
Head shape: Straight head.
Design: Fine, semi-circular tips. Ridged gripping surfaces. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: C 45 special tool steel, hardened and tempered.
Application: Mainly for precision gripping and bending work.

Order-No.	mm	"	A	B	D	F		
26799 5	**120**	**4 ¾**	9.5	23	6.5	1.4	60	5
27905 9	**145**	**5 ¾**	12.0	40	7.5	2.0	93	5



Z 36 1 04 **Needle nose pliers Professional ESD.**

Standards: DIN ISO 9655. IEC 61340-5-1.
Head shape: Angled at 45°.
Design: Fine, semi-circular tips. Smooth gripping surfaces. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: C 45 special tool steel, hardened and tempered.
Application: Mainly for precision gripping and bending work.

Order-No.	mm	"		
26802 2	**120**	**4 ¾**	60	5

Wiha Info

A variety of different pliers are required for electronics applications.

Simply contact us if you require different models for other applications.

Gripping pliers. Set combinations.



Z 37 0 04 **Round nose pliers Professional ESD.**

Standards: DIN ISO 9655. IEC 61340-5-1.
Head shape: Round, short jaws.
Design: Smooth gripping surfaces. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: C 45 special tool steel, hardened and tempered.
Application: Mainly for precision gripping and bending work.

Order-No.	mm	"		
26804 6	**120**	**4 ¾**	60	5



Z 38 0 04 **Flat nose pliers Professional ESD.**

Standards: DIN ISO 9655. IEC 61340-5-1.
Head shape: Flat, short jaws.
Design: Smooth gripping surfaces. With opening spring. Surface resistance 10^6 - 10^9 ohms.
Material: C 45 special tool steel, hardened and tempered.
Application: Mainly for precision gripping and bending work.

Order-No.	mm	"		
26806 0	**120**	**4 ¾**	60	5

Z 99 0 001 04 **Professional ESD pliers set, 4 pcs.**
Dissipative tools, electrostatically discharging.

Design: ESD tools manufactured according to IEC 61340-5-1. All pliers of high quality tool steel, hardened and fine-polished. Plier handles electrostatically discharge via all components. Surface resistance 10^6 - 10^9 ohms.
Pouch: Light and space-saving storage of tools.

Content:
Diagonal cutter without facet, 115 mm (Z 41 3 04 series)
Diagonal cutter with facet, 115 mm (Z 44 1 04 series)
Angular forward cutters, with minimal facet, 110 mm (Z 46 4 04 series)
Electric needle nose pliers, 120 mm (Z 36 0 04 series)

Application: Universal set for all cutting work with electronic applications.

Order-No.	Series	
33507 6	**Z 99 0 001 04**	1

Wiha Professional ESD.

For high standards when it comes to precision and safety.

EPA

The new assortment of Wiha electronic tweezers expands the possibilities for exact, and at the same time, careful work with electronic components. These precision, special or universal tweezers are rapidly becoming essential accessories for everyday electronics work due to their high-quality design: ESD safe (anti-static), anti-magnetic, stainless and acid-resistant. Unlike purely metal tweezers, the special coating here ensures a controlled dissipation of static charges, and therefore safe, standard-compliant use.

Thanks to its wide selection of tips, the Professional ESD precision tweezers handle even tricky work effortlessly, for example on sensitive semiconductors.

Tweezers are important tools for any electronics technician to enable the necessary work to be carried out safely in the often small, confined structures of PCBs.

Safety note:
Wiha ESD electronic tweezers are non-insulating, and are therefore not suitable for work on live parts.

Wiha Professional ESD.

- **ESD safe**
  Suitable for work at ESD workstations in accordance with IEC 61340-5-1, surface resistance 10^6 – 10^9 ohms
- **100% anti-magnetic**
  High-quality alloy made of chromium-nickel stainless steel with a high nickel content
- **Symmetrical**
  Exactly harmonised, precision tips for precise work
- **Acid-resistant and stainless**
  For an extra long service life
- **Non-glare surface**
  Enables optimal work

Universal tweezers.

ZP 01 0 14 **Universal tweezers Professional ESD.**
Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Universal tweezers for all current electronics applications.

Order-No.	mm	Typ		
32318 9	130	AA	19	10

ZP 46 0 14 **Universal tweezers Professional ESD.**
Standards: IEC 61340-5-1.
Design: Fine-tooth gripping surface, grooved gripping surface.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Universal tweezers for all current electronics applications.

Order-No.	mm	Typ		
32343 1	145	40	29	10

Precision tweezers.

ZP 06 0 14 **Precision tweezers Professional ESD.**
Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32347 9	130	GG	19	10

ZP 07 1 14 **Precision tweezers Professional ESD.**
Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32325 7	130	PSF	18	10

ZP 09 0 14 **Precision tweezers Professional ESD.**
Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32326 4	135	SS	13	10

Wiha Professional ESD.

For high standards when it comes to precision and safety.

Precision tweezers.

ZP 11 0 14 **Precision tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32327 1	120	00	21	10

ZP 15 0 14 **Precision tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32329 5	120	2a	16	10

ZP 16 0 14 **Precision tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32346 2	110	3c	14	10

Precision tweezers.

ZP 18 0 14 **Precision tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32334 9	110	5	13	10

ZP 20 1 14 **Precision tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32335 6	120	7a	15	10

ZP 20 2 14 **Precision tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: Precision tweezers for gripping and holding electronic components.

Order-No.	mm	Typ		
32336 3	120	7abb	15	10

Safety note:
Wiha ESD electronic tweezers are non-insulating, and are therefore not suitable for work on live parts.

SMD tweezers.

ZP 24 0 14 **SMD tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: SMD special tweezers for horizontal gripping of components.

Order-No.	mm	Typ		
32338 7	120	12	15	10

ZP 25 2 14 **SMD tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: SMD special tweezers for horizontal gripping of components.

Order-No.	mm	Typ		
32340 0	120	13	16	10

ZP 25 3 14 **SMD tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surfaces, gripping surfaces without grooves.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: SMD special tweezers for horizontal gripping of components.

Order-No.	mm	Typ		
32337 0	120	8b	16	10

SMD tweezers.

ZP 50 0 14 **SMD tweezers Professional ESD.**

Standards: IEC 61340-5-1.
Design: Smooth gripping surface, grooved gripping surface.
Non-glare black coated, anti-static.
Anti-magnetic and acid-resistant.
Surface resistance 10^6 - 10^9 ohms.
Material: Special alloyed, non-rusting, chromium-nickel stainless steel.
Application: SMD special tweezers for gripping and holding horizontally-designed components.

Order-No.	mm	Typ		
32344 8	117	59	14	10

ZP 99 0 140 02 **SMD tweezer set Professional ESD, 4 pcs.**
Dissipative tools, electrostatically discharging.

Design: ESD tools manufactured according to IEC 61340-5-1.
All tweezers are ESD-safe (anti-static) via a special ESD coating, acid-resistant, non-rusting and 100% anti-magnetic.
Surface resistance 10^6 - 10^9 ohms.

Content:
Universal tweezers, pointed, 130 mm (ZP 01 0 14 series)
Precision tweezers, angular-wide tips, 130 mm (ZP 07 1 14 series)
SMD tweezers, flat gripping surfaces, 120 mm (ZP 25 2 14 series)
SMD tweezers, gripping surface with radius, 117 mm (ZP 50 0 14 series)

Application: Hand assembly of PCBs with SMD components or re-work activities.

Order-No.	Series	
32349 3	ZP 99 0 140 02	1

Wiha Info

A variety of different tweezers are required for electronics applications.

Simply contact us if you require different models for other applications.

Wiha dialMax ESD.

Dial calliper.

dialMax ESD.

411 210 8	**Dial calliper dialMax ESD, reading 0.1 mm.**
Material:	Calliper made of ESD-safe material. Surface resistance 10^6 - 10^9 ohms.
Scale:	Dial, diameter 35 mm.
Reading:	0.1 mm; 1 dial rotation represents 10 mm. Accuracy as per DIN 862.
Packaging:	Blister packed.
Standards:	IEC 61340-5-1.
Application:	For all work with electrostatically endangered components. For outside, inside and depth measurements.
Extra:	Measurements in ESD protection zones and at ESD workstations. Impact resistant dial can be recalibrated to zero.

Order-No.				
31439 2	**150**	**6**	45	5

In 1965, new frontiers were entered with the world's first non-metallic callipers, manufactured from high-quality glass-fibre reinforced plastic, with a high level of Swiss precision.
Due to the unique advantages made available by the high-tech material, the "max Series" products have found new applications where their advantages are distinct when compared to the more heavy metal designs.

Wiha dialMax ESD.

- Non-metallic high-tech material with 60% fibre-glass content, extremely high rigidity
- Extremely wear-resistant measuring jaw for precise measurements in the long-term
- Non-corrosive, non-magnetic, hardly conductive and electrically insulated
- Resistant to chemicals (alkalis, petrol, oil, grease, etc.)
- Thermal stability of the measuring surfaces: short-term up to 180°C, continuous 100 - 120°C
- Practical ratchet guarantees uniform clamping force of the measuring jaw
- Unlike metal callipers, prevents damage to delicate surfaces
- Electrostatically discharging (dissipative), surface resistance 10^6 – 10^9 ohms
- Meets ESD standard IEC 61340-5-1

Wiha ESD application sets.

The right tool for any application.

ESD application sets.

9300-015	**Wiha operator kit, 5 pcs.** **Dissipative tools, electrostatically discharging.**
Design:	ESD tools manufactured according to IEC 61340-5-1. Maximum protection of electronic components from electrostatically discharging tools and packaging.
Pouch:	Handy leather bag, ideal for all overall pockets. Safe storing of tools directly in the overall. No danger of injury to users or damage to workwear from sharp or loose tools in overall pockets.
Content:	**Professional ESD universal tweezers** (ZP 01 0 14 series) **Wiha Precision ESD screwdrivers:** – Slotted screwdriver, 2.5x50 (272 series) – Phillips screwdriver, PH0x50 (273 series) **SMD belt shears** (246 series) **Dust and dirt brush** (246 series)
Application:	The most important tools for automatic insertion machines in continuous operation.

Order-No.	Series	
33504 5	**9300-015**	1

ESD application sets.

9300-016	**Wiha electronic assembling kit, 9 pcs.** **Dissipative tools, electrostatically discharging.**
Design:	ESD tools manufactured according to IEC 61340-5-1. Diagonal cutters without facet especially suitable for clean and smooth cutting of wired components. Wide selection of current screwdrivers for electronic applications. With universal tweezers for assembly of PCBs or for SMD re-work activities.
Pouch:	Robust and space-saving storage of tools.
Content:	**Diagonal cutter without facet,** 115 mm (Z 41 3 04 series) **Electric needle nose pliers,** 120 mm (Z 36 0 04 series) **Professional ESD universal tweezers** (ZP 01 0 14 series) **Wiha Precision ESD screwdrivers:** - Slotted screwdriver, 2.0x40 / 2.5x50 (272 series) – Phillips screwdriver, PH00x40 / PH0x50 (273 series) – TORX® screwdriver, T5x40 / T6x40 (278 series)
Application:	The most important tools for hand assembly of electronic components and re-work activities.

Order-No.	Series	
33505 2	**9300-016**	1

9300-017	**Wiha electronic service kit, 8 pcs.** **Dissipative tools, electrostatically discharging.**
Design:	ESD tools manufactured according to IEC 61340-5-1. Diagonal cutters with facet, suitable for cutting of thin and hard wires. Wide selection of current reversible blades for electronic applications. Light and compact design.
Pouch:	Light and space-saving storage of tools.
Content:	**Diagonal cutter with facet,** 115 mm (Z 44 1 04 series) **Electric needle nose pliers,** 120 mm (Z 36 0 04 series) **Professional ESD universal tweezers** (ZP 01 0 14 series) **SYSTEM 4 SoftFinish® telescopic ESD handle** **SYSTEM 4 reversible blades** (269 series): – Slotted/ Phillips: 2.0 - PH00 / 2.5 - PH0 – TORX®: T5-T6 – Hexagon/hexagon ball end: SW 1.5 - SW 1.5
Application:	Set combination ideally suited to maintenance work with electronic components.

Order-No.	Series	
33506 9	**9300-017**	1

Wiha Info

Wiha application sets:

- Tool sets especially matched to your application
- Orderly, clearly laid out arrangement of the most common tools
- No additional ballast due to unnecessary tools
- Direct input of the experience of final users already integrated in product development

Wiha stainless steel tools.

Wiha makes it possible: Screwdrivers, L-keys and bits manufactured with non-rusting stainless steel.

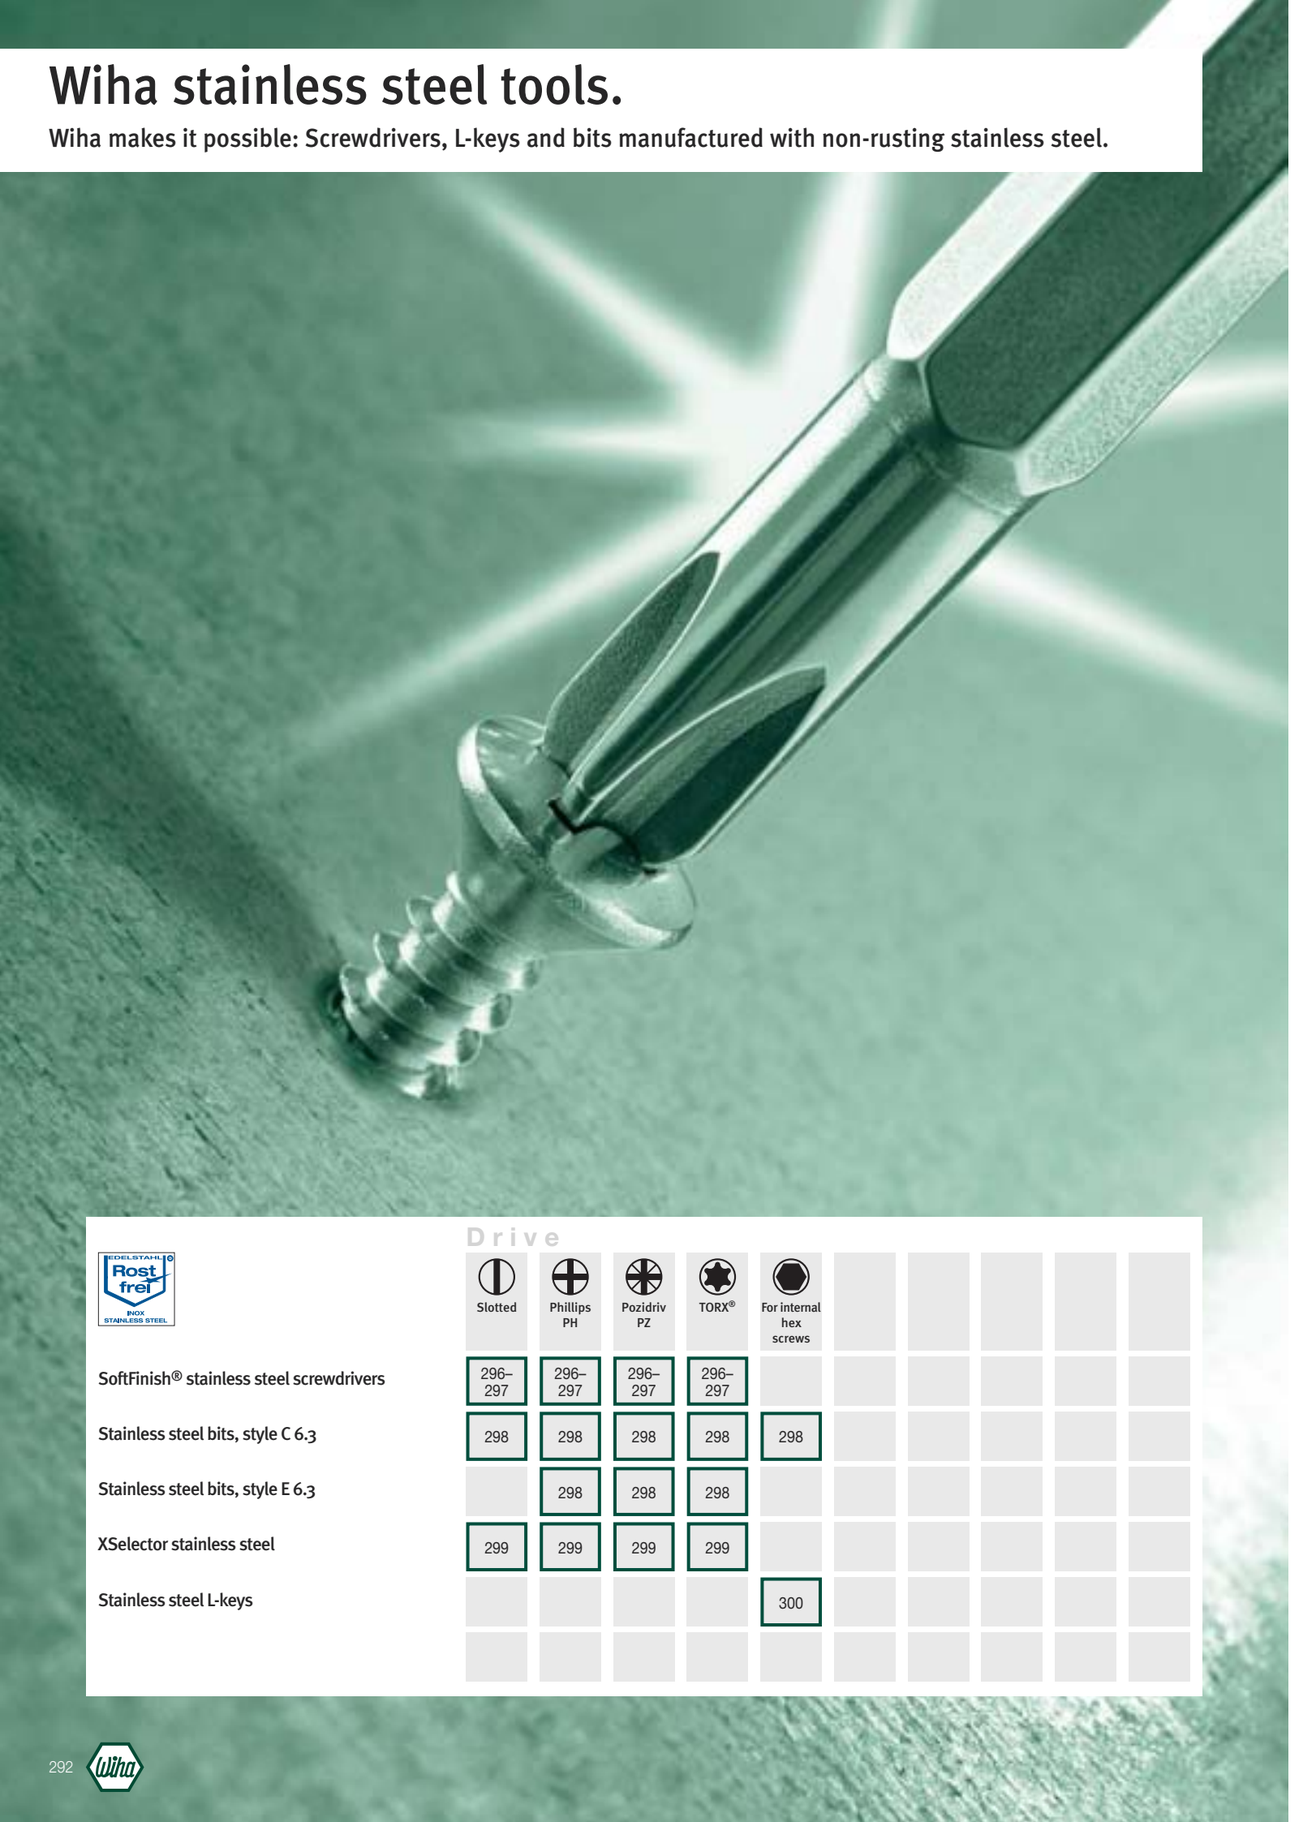

	Drive									
	Slotted	Phillips PH	Pozidriv PZ	TORX®	For internal hex screws					
SoftFinish® stainless steel screwdrivers	296–297	296–297	296–297	296–297						
Stainless steel bits, style C 6.3	298	298	298	298	298					
Stainless steel bits, style E 6.3		298	298	298						
XSelector stainless steel	299	299	299	299						
Stainless steel L-keys					300					

Stainless steel tool assortment

Wiha stainless steel.
For perfect fastening and unfastening. 294 – 295

Wiha SoftFinish® stainless steel screwdrivers.
Specialists for tough jobs. 296 – 297

Wiha stainless steel bits.
Precision-fitting, powerful and durable. 298

Wiha XSelector stainless steel.
It can't get any more compact than that. 299

Wiha stainless steel quick release holder.
One for all. 299

Wiha stainless steel L-keys.
The key to success. 300

Wiha stainless steel tool set.
Compact, basic equipment. 301

Wiha stainless steel.

For perfect fastening and unfastening.

Stainless steel has become all-present. Its ascent in the past decades has been due mainly to some outstanding qualities:

Durable and versatile

Extremely resilient, corrosion- and acid-resistant, weather-resistant, easy to process, hygienic and easy to clean – a material cannot be complimented more highly.

Pure

On the one hand this characteristic reflects the refinement of the high-alloy composition of stainless steel. But on the other hand it also bears witness to its noble appearance and lordly emanation.

Conserves resources

Stainless steel can be recycled up to one hundred percent. This spares natural resources, making this quality an essential feature not just for today but for the years ahead.

Essential

All of these qualities have made non-rusting stainless steel a leading material for maximum quality requirements in both the interior design and building construction sectors. And in all areas and dimensions: from a single screw to a building facade, and from the rivet of a ship to complete shipbuilding. Areas with future-fit technologies such as solar technology would not be the same without it. Non-rusting stainless steel also plays a dominant role in sectors such as automotive engineering, the foodstuffs industry and offshore applications.

Non-rusting

Stainless steel does not inevitably have to comply with the demands made upon non-rusting steel. And likewise, non-rusting steel is not categorically stainless steel. Decisive for the definition of stainless steel is the alloying component of the various types, for example low-alloy or high-alloy stainless steel. This factor is exactly specified for each type. One thing's for sure: a non-rusting stainless steel must contain at least 10.5% chrome.

But rust can also collect even on non-rusting stainless steel. The cause: contact with a "foreign", i.e. a non-stainless steel tool. This leaves foreign particles upon the stainless steel surface that then rust. This "extraneous rust" is not only a blemish, but in the form of pitting can become a real safety threat.

That's why:

non-rusting stainless steel needs non-rusting stainless steel tools.

Only with non-rusting stainless steel tools is the transfer of foreign particles and therefore the cause of rust eliminated.

Passive protects active

The simple trick for long life: when the chrome surface, either in air or water, reacts with oxygen, a wafer-thin protective layer is created, the so-called "passive layer". It consistently repels aggressive substances. In addition it has the capability to regenerate ("self-healing"). An additional hardening, a characteristic of all Wiha stainless steel tools, reinforces this characteristic.

It's a question of chemistry: the stainless steel sortiment from Wiha.

The popularity of stainless steel can be seen at the "basis" as well: since the middle of the 90's, the use of stainless steel screws has risen enormously. Here though risk of extraneous rust is particularly high.

The wide-ranging and versatile application possibilities for non-rusting stainless steel or stainless steel screws today place high demands upon tools.

Wiha SoftFinish® stainless steel screwdrivers.

Specialists for tough jobs.

For slotted and Phillips screws.

308ST **SoftFinish® stainless steel slotted screwdriver. Hex blade.**

Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Material: DIN ISO 2388, DIN EN 10 088. Output: DIN 5265, DIN ISO 2380.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.							
32606 7	3.5	75	0.6	4.0	179	23	10
32607 4	4.5	90	0.8	4.0	201	30	10
32608 1	5.5	100	1.0	5.5	213	36	10
32609 8	6.5	125	1.2	6.0	238	36	10

For Pozidriv and TORX® screws.

314ST **SoftFinish® stainless steel Pozidriv screwdriver. Hex blade.**

Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Material: DIN ISO 2388, DIN EN 10 088. Output: ISO 8764.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.						
32613 5	PZ1	80	5.0	186	30	10
32614 2	PZ2	100	6.0	213	36	10
32615 9	PZ3	150	8.0	268	41	10

312ST **SoftFinish® stainless steel Phillips screwdriver. Hex blade.**

Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Material: DIN ISO 2388, DIN EN 10 088. Output: ISO 8764.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.						
32610 4	PH1	80	5.0	186	30	10
32611 1	PH2	100	6.0	213	36	10
32612 8	PH3	150	8.0	268	41	10

376ST **SoftFinish® stainless steel TORX® screwdriver. Hex blade.**

Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Material: DIN ISO 2388, DIN EN 10 088.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.						
32616 9	T8	60	4.0	164	23	10
32617 3	T9	60	4.0	171	30	10
32618 0	T10	80	4.0	191	30	10
32619 7	T15	80	4.0	191	30	10
32620 3	T20	100	4.0	218	36	10
32621 0	T25	100	4.5	218	36	10
32622 7	T27	115	5.5	233	36	10
32623 4	T30	115	6.0	233	36	10
32624 1	T40	130	7.0	254	41	10

Sets.

308ST HK6 **SoftFinish® stainless steel slotted/ Phillips screwdriver set, 6 pcs. Hexagon blades.**

Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.	Series				
32625 8	308ST HK6				1
	308ST	3.5x75	4.5x90	5.5x100	6.5x125
	312ST	PH1x80	PH2x100		

Sets.

376ST K6 SO **SoftFinish® stainless steel TORX® screwdriver set, 6 pcs. Hexagon blades.**

Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.	Series		
32628 9	376ST K6 SO		1
	376ST	T10x80	T15x80	T20x100
		T25x100	T30x115	T40x130

308ST ZK6 **SoftFinish® stainless steel slotted/ Pozidriv screwdriver set, 6 pcs. Hexagon blades.**

Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.	Series				
32626 5	308ST ZK6				1
	308ST	3.5x75	4.5x90	5.5x100	6.5x125
	314ST	PZ1x80	PZ2x100		

Wiha stainless steel bits.

Precision-fitting, powerful and durable.

Style C 6.3 (1/4").

7010ST Stainless steel bit, slotted, style C 6.3.

Material: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.				
32645 6	4.5	25	0.6	10
32646 3	5.5	25	0.8	10
32647 0	6.5	25	1.2	10
32648 7	8.0	25	1.2	10

7011ST Stainless steel bit, Phillips, style C 6.3.

Order-No.			
32649 4	PH1	25	10
32650 0	PH2	25	10
32651 7	PH3	25	10

7012ST Stainless steel bit, Pozidriv, style C 6.3.

Order-No.			
32652 4	PZ1	25	10
32653 1	PZ2	25	10
32654 8	PZ3	25	10

7015ST Stainless steel bit, TORX®, style C 6.3.

Order-No.			
32655 5	T8	25	10
32656 2	T9	25	10
32657 9	T10	25	10
32658 6	T15	25	10
32659 3	T20	25	10
32660 9	T25	25	10
32661 6	T30	25	10
32690 6	T40	25	10

Style C 6.3 (1/4").

NEW

7013ST Stainless steel bit, hex, style C 6.3.

Order-No.			
34005 6	1.5	25	10
34006 3	2.0	25	10
34007 0	2.5	25	10
34008 7	3.0	25	10
34009 4	4.0	25	10
34010 0	5.0	25	10
34011 7	6.0	25	10

Style E 6.3 (1/4").

7041ST Stainless steel bit, Phillips, style E 6.3.

Material: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.			
32662 3	PH1	50	10
32663 0	PH2	50	10
32664 7	PH3	50	10

7042ST Stainless steel bit, Pozidriv, style E 6.3.

Order-No.			
32665 4	PZ1	50	10
32666 1	PZ2	50	10
32667 8	PZ3	50	10

7045ST Stainless steel bit, TORX®, style E 6.3.

Order-No.			
32668 5	T15	50	10
32669 2	T20	50	10
32670 8	T25	50	10
32671 5	T30	50	10
32672 2	T40	50	10

Wiha XSelector stainless steel.

It can't get any more compact than that.

Stainless steel bits.

7944-0ST5 XSelector stainless steel, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm stainless steel bits.
Ideally suitable for fastening and unfastening of stainless steel screws.
Holder: CentroFix stainless steel quick release holder, style E 6.3.
Application: Fits in every pocket and couldn't be smaller.

Order-No.	Series				
32910 5	7944-0ST5				10
	7010ST	1x5.5	1x6.5		
	7011ST	1xPH1	2xPH2	1xPH3	
	7012ST	1xPZ1	2xPZ2	1xPZ3	
	7148STC	CentroFix stainless steel quick release holder, style E 6.3			

SB7944-0ST5 XSelector stainless steel, mixed, 11 pcs.
Blister packed for hanging.

Order-No.	Series				
33785 8	SB7944-0ST5				10
	7010ST	1x5.5	1x6.5		
	7011ST	1xPH1	2xPH2	1xPH3	
	7012ST	1xPZ1	2xPZ2	1xPZ3	
	7148STC	CentroFix stainless steel quick release holder, style E 6.3			

7944-9ST4 XSelector stainless steel, mixed, 11 pcs.

Order-No.	Series				
32908 2	7944-9ST4				10
	7011ST	1xPH1	1xPH2	1xPH3	
	7012ST	1xPZ1	1xPZ2	1xPZ3	
	7015ST	1xT15	1xT20	1xT25	1xT30
	7148STC	CentroFix stainless steel quick release holder, style E 6.3			

SB7944-9ST4 XSelector stainless steel, mixed, 11 pcs.
Blister packed for hanging.

Order-No.	Series				
33787 2	SB7944-9ST4				10
	7011ST	1xPH1	1xPH2	1xPH3	
	7012ST	1xPZ1	1xPZ2	1xPZ3	
	7015ST	1xT15	1xT20	1xT25	1xT30
	7148STC	CentroFix stainless steel quick release holder, style E 6.3			

Stainless steel bits.

7944-5ST5 XSelector, stainless steel, TORX®, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm stainless steel bits.
Ideally suitable for fastening and unfastening of stainless steel screws.
Holder: CentroFix stainless steel quick release holder, style E 6.3.
Application: Fits in every pocket and couldn't be smaller.

Order-No.	Series					
32911 2	7944-5ST5					10
	7015ST	1xT8	1xT9	1xT10	1xT15	
		2xT20	2xT25	1xT30	1xT40	
	7148STC	CentroFix stainless steel quick release holder, style E 6.3				

SB7944-5ST5 XSelector, stainless steel, TORX®, 11 pcs.
Blister packed for hanging.

Order-No.	Series					
33786 5	SB7944-5ST5					10
	7015ST	1xT8	1xT9	1xT10	1xT15	
		2xT20	2xT25	1xT30	1xT40	
	7148STC	CentroFix stainless steel quick release holder, style E 6.3				

Bit holder.

7148ST CentroFix stainless steel quick release holder, style E 6.3.
Blister packed.

Sleeve: Metal, coated.
Bit holder: Of high-quality, non-rusting stainless steel, therefore recommended for use with stainless steel bits.
Suitable for: DIN 3126, ISO 1173, style D 6.3 + F 6.3 and double bits.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Whenever the bit needs a secure and zero-play hold.
Optimised for the use of long bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive.
The play between bit and holder is reduced to a minimum.
Real single-handed operation for fast bit exchange.

Order-No.				
33765 0	1/4	1/4	60	10

Wiha stainless steel L-keys.

The key to success.

For Allen screws (metric).

369ST **Hexagon ball end stainless steel L-key, long.**
Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Standards: Based on DIN ISO 2936, DIN EN 10 088.
Application: Ideally suitable for fastening and unfastening of stainless steel screws in hard-to-reach places.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	◉			
32635 7	1.5	91	15	10
32636 4	2	101	18	10
32637 1	2.5	113	20	10
32638 8	3	128	23	10
32639 5	4	142	29	10
32640 1	5	163	33	10
32641 8	6	184	38	10
32642 5	8	206	44	10
32643 2	10	231	50	10

For Allen screws (metric).

SB 369ST S9 **Hexagon ball end stainless steel L-key set in ProStar, 9 pcs. Blister packed.**

Order-No.										
32633 3	SB 369ST S9									5
◉	369ST	1.5	2	2.5	3	4	5	6	8	10

369ST S9 **Hexagon ball end stainless steel L-key set in ProStar, 9 pcs.**
Blade: High-quality, non-rusting stainless steel, completely vacuum-hardened.
Standards: Based on DIN ISO 2936, DIN EN 10 088.
Application: Ideally suitable for fastening and unfastening of stainless steel screws in hard-to-reach places.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.
The ball end enables the user to work at angles up to 25°.

Order-No.										
32632 6	369ST S9									5
◉	369ST	1.5	2	2.5	3	4	5	6	8	10

369ST SVH1 **Display of hexagon ball end stainless steel L-key sets. In ProStar, 9 pcs. Carton display with 10 pieces.**

Order-No.	Content	◉	
33784 1	10 x 369ST S9	1.5 - 10	1

Wiha stainless steel tool set.

Compact, basic equipment.

Set combination.

9300-701 **Stainless steel tool set, 6 pcs.**
Case: High quality box for practical storing of Wiha stainless steel tools.

Content: **Wiha SoftFinish® stainless steel screwdriver:**
– Slotted screwdriver, 3.5x75 / 5.5x100 (308ST series)
– Phillips screwdriver, PH1x80 / PH2x100 (312ST series)
Hexagon ball end stainless steel L-key set in ProStar, 9 pcs.
XSelector stainless steel, mixed, 11 pcs. (7944-9ST4)

Application: Ideally suitable for fastening and unfastening of stainless steel screws.

Order-No.	Series	
33783 4	9300-701	1

Wiha Info

Non-rusting stainless steel: timeless beauty and quality.

Wiha, the specialist for premium tools, offers the ideal range of non-rusting stainless steel tools.
Whether screwdrivers, bits or L-keys – these professional tools guarantee maximum quality and convenient handling, made in Germany.

How to find the correct tip?

	Drive										
	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®	Hex	Nut driver	Square	Triangular nut	Slotted nuts
SoftFinish® The specialist for dry and general applications	11, 13 17–18	12, 13 17–18	12, 13 17–19	14, 19	14, 19	15	15	16, 18		16	17
SoftFinish® Stubby For working in confined spaces	13	13	13								
Screw-holding screwdrivers Allows access to hard to reach areas	11	12									
MicroFinish The specialist for wet and oily applications	21, 23	21, 23	22–23	22				22			
Classic The robust screwdriver for multiple applications	25–26	25–26	25–26	25			26	26			
Small screwdriver The pocket screwdrivers	28										
Wooden handle The all-rounder for woodworking applications	33	33	33								
PicoFinish The comfortable precision screwdriver	35, 38	35, 38	35	36, 38–39		36	37, 39	37, 39			
SoftFinish® electric The safe and comfortable insulated VDE screwdriver	232– 233	232– 233	229, 232	230, 233			230	231, 233	230		
Classic electric The space-saving insulated VDE screwdriver	238	238									
Voltage testers For both DIY and professional users	239– 240										
SoftFinish® ESD For use on electrostatically sensitive components	265– 266	265– 266	265	266				266			
Precision ESD The static dissipative precision screwdriver	268, 270	268, 270	268	269, 270		269	268, 270	268, 270			
Ceramic The non-static adjustment tool for clean rooms	271	271									
SoftFinish® stainless steel For perfect fastening and unfastening	296– 297	296– 297	296– 297	296– 297							
	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®	Hex	Nut driver	Square	Tri-Wing®	Torq-Set®
Torque screwdrivers	48	46, 48	46, 48	46–47, 49, 53		46–47, 49, 53	46–48, 52–53				
Torque VDE screwdrivers	243	243	243	243							
Torque ESD screwdrivers	279– 280	279– 280	279– 280	279– 280							
SYSTEM 6 Reversible blade system	58, 60–62	58, 60–62	58, 60–62	58, 60–62	58, 61		58, 60–62	62		59, 61	59, 61
SYSTEM 4 Reversible blade system	64, 66–67	64, 66–67	64	65–67			65–67	65			
SYSTEM 6 ESD Reversible blade system	273– 274	273– 274	273	273	273		273– 274			274	274
SYSTEM 4 ESD Reversible blade system	276– 277	276– 277	276	276– 277			276– 277	277			

	Drive										
	Slotted	Phillips PH	Pozidriv PZ	TORX® + TORX® Tamper Resistant	TORX PLUS®	Hex (mm, Inch)	Nut driver (mm, Inch)	Square	Square nut	Hex with pivot	Multi-tooth
L-keys	109	109	109	87, 90–93	88, 93	71, 75–85				83	93
PocketStar + Mini PocketStar Press one button for the correct key	96–98	96–98		96–98		95–98					
ComfortGrip T-handle Soft zones for maximum working comfort				101		100– 101					
T-handle				106	106	103– 105	104– 105		105		
Key handle				108	108	108					
Flag handle				109	109						
Stainless steel L-keys For perfect fastening and unfastening						300					

	Drive										
	Slotted	Phillips PH	Pozidriv PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®	Hex	Square	Multi-tooth	Tri-Wing® + Torq-Set®	SIT + Spanner
DuraBits A diamond among bits Drive system C 6.3 and E 6.3	113	113	113	113							
Diamond torsion bits Saves strength, time & money Drive system C 6.3 and E 6.3	115	115	115	115							
Torsion bits Patented torsion zone for longer service life Drive system C 6.3 and E 6.3	117– 119	117– 120	117– 120	117– 119						120	
Inkra bits The specialist for every angle		121	121								
Standard bits Full programme range in outstanding quality Drive system C 6.3 and E 6.3	123, 128	123, 128	123, 128	124, 128–129	124, 130	124, 130	125, 131	126, 131	126		126
Bits with MagicRing® Perfect location in every position							125, 131				
Threaded bits For optimised use in stationary screw systems		132	132	132							
Bits for drive system C 4 For screw connections in miniature applications	134– 135	134– 135		134– 135			134– 135				
Bits for drive system C 8 + G 7	136	136	136	136			136				
Stainless steel bits For perfect fastening and unfastening	298– 299	298– 299	298– 299	298– 299			298				
	Wood twist drill	Twist drill	Universal drill	Combination drill	Counter-sink						
Drill bits Just keep on working	138	138	139	139	138– 139						

It all fits together...

DIN screwdrivers

Size	Torque test Nm	Slotted screws – Metric screws – Flat head		Oval head		Cheese head		Pan head				Set		Self tapping screws – Flat head		Oval head		Pan head		Wood screws – Flat head	Oval head	Round head
		ISO 2009		ISO 2010		ISO 1207		ISO 1580				ISO 4766 7435	ISO 7435	ISO 1482		ISO 1483		ISO 1481				
			DIN 963		DIN 964		DIN 84		DIN 85	DIN 920	DIN 921	DIN 551 417	DIN 427		DIN 7972		DIN 7973		DIN 7971	DIN 97	DIN 95	DIN 96
		M	M	M	M	M	M	M	M	M	M	M	M	B	B	B	B	B	B	H	H	H
2 x 0,4	0,30											2,5 3	2,5 3							1,6		1,6
2,5 x 0,4	0,40	1,6	1,6	1,6	1,6		1,6 1,8	1,6		2,5	1,6	3,5	3,5								1,6	2
3 x 0,5	0,7	2	2	2	2		2	2		3/3,5	2	4	4	2,2	2,2	2,2	2,2	2,2		2	2	
3,5 x 0,6	1,3	2,5	2,5	2,5	2,5		2,5	2,5		4	2,5								2,2	2,5	2,5	2,5
4 x 0,8	2,6	3	3 3,5	3	3 3,5			3	3	5	3 3,5	5 6	5 6	2,9	2,9	2,9	2,9	2,9	2,9	3 3,5	3 3,5	3 3,5
5,5 x 1	5,5	3,5	4	3,5	4	3,5	4	3,5	3,5	6	4			3,5	3,5 3,9	3,5	3,5 3,9	3,5	3,5 3,9	4 4,5	4 4,5	4 4,5
6,5 x 1,2	9,4	4 5	5	4 5	5	4	4					8	8	4,2 4,8	4,2 4,8	4,2 4,8	4,2			5	5	5 5,5
8 x 1,2	11,5					5	5	4 5	4 5	8	5						4,8	4,2 4,8	4,2 4,8	5,5	5,5	
8 x 1,6	20,5	6	6	6	6							10 12	10 12	5,5 6,3	5,5 6,3	5,5 6,3	5,5			6	6	6
10 x 1,6	25,6					6	6	6	6	10	6		14				6,3	5,5 6,3	5,5 6,3	7 8	7	
12 x 2	48,0	8	8	8	8	8	8	8	8		8		16	8		8		8			8	7–8
14 x 2,5	87,5	10	10	10	10	10	10	10	10		10		18-20	9,5		9,5		9,5		10		

Size		Nm	Phillips + Pozidriv – Metric screws – Flat head	Oval head	Pan head	Self tapping screws – Pan head	Flat head	Oval head	Wood screws – Oval head	Round head	Flat head	ANSI screws
		Phillips										
		Pozidriv										
		Torque test ISO 8764	ISO 7046	ISO 7047	ISO 7045	ISO 7049	ISO 7050	ISO 7051				
			DIN 965	DIN 966	DIN 7985	DIN 7981	DIN 7982	DIN 7983	DIN 7995	DIN 7996	DIN 7997	
			M	M	M	B	B	B	H	H	H	No.
00	00	*	*	*	*	*	*	*	*	*	*	
0	0	1	1,6 2	1,6 2	1,6 1,8				2	2	2	0 – 1
1	1	3,5	2,5 3	2,5 3	2 3	2,2 2,9	2,2 2,9	2,2 2,9	2,5 3	2,5 3	2,5 3	2 – 4
2	2	8,2	3,5 5	3,5 5	3,5 5	3,5 4,8	3,5 4,8	3,5 4,8	3,5 5	3,5 5	3,5 5	5 – 10
3	3	19,5	6	6	6	5,5 6,3	5,5 6,3	5,5 6,3	5,5 7	5,5 7	5,5 7	12 – 16
4	4	38	8 10	8 10	8 10				8	8	8	18 – …

* Special screws

Index

ISO International standard
DIN German standard

M Metric screws	Thread diameter
M Set screw metric	Thread diameter
M Metric nut	Thread diameter
B Self tapping screws	Thread diameter
H Wood screws	Thread diameter

Symbols

Tool drive = screwdriver socket
for screws with internal drive

Tool drive = Nutdriver socket
for screws with head drive

TORX® screwdrivers



Size 1:1	TORX® Size	mm	Torque test Nm	Internal TORX® – Metric screws – Cheese head	Flat head	Oval head	Cheese head	Oval head	Flat head	Self tapping screws – Pan head	Flat head	Oval head
				ISO 4762	ISO 7046	ISO 7047 2010		ISO 7045	ISO 10642	ISO 7049	ISO 7050	ISO 7051
				DIN 912	DIN 963 965	DIN 964 966	DIN 7984 6912	DIN 7985	DIN 7991	DIN 7981 7982	DIN 7972 7983	DIN 7973
				M	M	M	M	M	M	B	B	B
	T 5	1,42	0,43	*	*	*	*	*	*	*	*	*
	T 6	1,70	0,75	2	*	2	*	2	*	2,2	2,2	2,2
	T 7	1,99	1,4	*	*	*	*	*	*	*	*	*
	T 8	2,31	2,2	2,5	2,5	2,5		2,5		2,9	2,9	
	T 9	2,50	2,8									
	T 10	2,74	3,7	3	3	3	3	3	3	3,5	3,5	2,9
	T 15	3,27	6,4		3,5	3,5		3,5	4	3,9	3,9	3,5
	T 20	3,86	10,5	4	4	4	4	4	5	4,2	4,2	4,2
	T 25	4,43	15,9	5	5	5		5	6	4,8 5,5	4,8 5,5	4,8 5,5
	T 27	4,99	22,5	**	**	**	**	**	**	**	**	**
	T 30	5,52	31,1	6	6	6	6	6		6,3	6,3	6,3
	T 40	6,65	54,1		8				8			8
	T 45	7,82	86	8	**	8	8	8	**	**	**	**
	T 50	8,83	132	10	10	10	10	10	10			9,5
	T 55	11,22	218	12			12					
	T 60	13,25	379	14			14					

* Screws for tungsten carbide inserts
** Special screws

TORX® and TORX PLUS® are registered trademarks of Camcar, Div. of Textron Inc.

TORX® nut drivers

Size 1:1	TORX® Size	mm	External TORX® – Metric screws – Flange	Flange
			ISO 4014 4017	ISO 8100
			DIN 931 933	DIN 6921
			M	M
	E 4	3,83	3	
	E 5	4,72	4	
	E 6	5,69	5	4
	E 7	6,17	**	**
	E 8	7,47	6	5
	E 10	9,37	8	6
	E 12	11,12	10	8
	E 14	12,85	12	10
	E 16	14,71	**	**
	E 18	16,64	14	12
	E 20	18,41	16	14

It all fits together...

DIN hex keys

	Torque test	Hex sockets – Metric screws: Cheese head	with pivot	Cheese head	Flat head	Set		
	ISO 2936	ISO 4762			ISO 10642	ISO 4026 4029	ISO 4027	ISO 4028
		DIN 912	DIN 6912	DIN 7984	DIN 7991	DIN 913 916	DIN 914	DIN 915
	Nm	M	M	M	M	M	M	M
0,7	0,08					1,4	1,4	1,4
						1,6	1,6	1,6
						1,8	1,8	1,8
0,9	0,18					2	2	2
1,3	0,53	1,4				2,5	2,5	2,5
1,5	0,82	1,6-2				3	3	3
2	1,9	2,5		3	3	4	4	4
2,5	3,8	3		4	4	5	5	5
3	6,6	4	4	5	5	6	6	6
4	16	5	5	6	6	8	8	8
5	30	6	6	8	8	10	10	10
6	52	8	8		10	12	12	12
						14	14	14
7	78			10				
8	120	10	10	12	12	16	16	16
10	220	12	12	14	14	18	18	18
					16	20	20	20
12	370	14	14	16	18	22	22	22
				18	20	24	24	24
14	590	16	16	20	22			
		18	18	22	24			
17	1000	20	20	24				
		22	22					
19	1000	24	24					
		27	27					
22	1000	30	30					
24	1000	33	33					
27	1000	36	36					
32	1000	42						

DIN nut drivers

	Torque test	Hex heads – Metric screws and nuts: Screws				Nuts		Screws: Self tapping	Wood screws
	ISO 1711	ISO 8100	ISO 4016	ISO 4014	ISO 4017	ISO 4035 4036	ISO 4032 4033	ISO 1479	
		DIN 6921	DIN 601	DIN 931	DIN 933	DIN 439	DIN 934	DIN 7976	DIN 571
SW	Nm	M	M	M	M	M	M	B	H
2,5	–						1		
3	1,1						1,2		
							1,4		
3,2	1,3			1,6	1,6	1,6	1,6	2,2	
3,5	1,6					1,8			
4	2,4			2	2	2	2		
4,5	3,3				2,3				
5	4,4			2,5	2,5	2,5	2,5	2,9	
5,5	5,8			3	3	3	3	3,5	
6	7,4			3,5	3,5	3,5	3,5		
7	11,4			4	4	4	4	3,9	4
								4,2	
8	16,6	5	5	5	5	5	5	4,8	5
								5,5	
9	23,0								
10	31,0	6	6	6	6	6	6	6,3	6
11	40,4			7	7		7		
12	51,5								7
13	64,5	8	8	8	8	8	8	8	8
14	79,4		–	–	–	–	–	–	–
15	96,2		–	–	–	–	–	–	–
16	115	10	10	10	10	10			
17	134	10	10	10	10	10	10		10

	Square head – Metric screws			Metric nuts		
	DIN 478	DIN 479	DIN 480	DIN 557	DIN 562	
SW	M	M	M	M	M	
3,5					1,8	
4					2	
4,5	–	–	–	–	–	
5	5	5			2,5	
5,5					3	
6	6	6			3,5	
7					4	
8	8	8	8	5	5	
9	–	–	–	–	–	
10	10	10	10	6	6	
11	–	–	–	–	–	
12	–	–	–	–	–	
13	12	12	12	8	8	
14	–	–	–	–	–	

Inch = mm	Inch = mm
1/16 = 1,59	9/32 = 7,14
5/64 = 1,98	5/16 = 7,94
3/32 = 2,38	11/32 = 8,73
7/64 = 2,78	3/8 = 9,53
1/8 = 3,18	7/16 = 11,11
9/64 = 3,57	1/2 = 12,90
5/32 = 3,97	9/16 = 14,29
3/16 = 4,76	5/8 = 15,88
7/32 = 5,56	3/4 = 19,05
1/4 = 6,35	

It all fits together...

DIN screwdriver sockets

	Torque test	Slotted screws – Metric screws: Flat head		Oval head		Cheese head		Pan head				Set		Self tapping screws: Flat head		Oval head		Pan head		Wood screws: Flat head	Oval head	Round head
	ISO 2351	ISO 2009		ISO 2010		ISO 1207		ISO 1580				ISO 4766 7435	ISO 7435	ISO 1482		ISO 1483		ISO 1481				
			DIN 963		DIN 964		DIN 84		DIN 85	DIN 920	DIN 921	DIN 551 417	DIN 427		DIN 7972		DIN 7973		DIN 7971	DIN 97	DIN 95	DIN 96
	Nm	M	M	M	M	M	M	M	M	M	M	M	M	B	B	B	B	B	B	H	H	H
2 x 0,4	0,35											2,5 3	3									
2,5 x 0,4	0,42	1,6	1,6	1,6	1,6	1,6	1,6	1,6		2,5	1,6	3,5	3,5 4							1,6	1,6	1,6
3 x 0,5	0,8	2	2	2	2	2	2 1,8	2		3		4		2,2	2,2	2,2		2,2		2	2	2
4 x 0,5	1,1									3	2											
3,5 x 0,6	1,4	2,5	2,5	2,5	2,5	2,5							5				2,2		2,2	2,5	2,5	
4,5 x 0,6	1,8						2,5	2,5		4	2,5											2,5
4 x 0,8	2,9	3	3	3	3	3		3				5 6	6	2,9	2,9	2,9	2,9	2,9		3	3	
5,5 x 0,8	3,9		3,5		3,5		3 3,5		3 3,5	5	3 3,5								2,9	3,5	3,5	3,5 3
5,5 x 1	6,2	3,5	4	3,5	4	3,5	4	3,5	4	6	4		8	3,5	3,5 3,9	3,5	3,5 3,9	3,5	3,5 3,9	4 4,5	4 4,5	4 4,5
6,5 x 1,2	10,5	4		4		4		4				8	10	4,2	4,2	4,2	4,2					
8 x 1,2	12,9	5	5	5	5	5	5	5	5	8	5			4,8	4,8	4,8	4,8	4,2 4,8	4,2 4,8	5,5 5	5,5 5	5 5,5
8 x 1,6	22,9					6						10 12	(12)	5,5	5,5	5,5						
10 x 1,6	28,7	6	6	6	6		6	6	6	10	6		(14)	6,3	6,3	6,3	6,3 5,5	5,5 6,3	5,5 6,3	7 6	7 6	6
12 x 2	53,8	8	8	8	8	8	8	8	8		8		(16)	8		8		8		8	8	7–8
14 x 2,5	98,0	10	10	10	10	10	10	10	10		10		(18-20)	9,5		9,5		9,5		10		

Size			Phillips and Pozidriv screws – Metric screws: Flat head	Oval head	Oval head	Self tapping screws: Oval head	Flat head	Oval head	Wood screws: Oval head	Round head	Flat head	ANSI screws
Phillips	Pozidriv	Torque test	ISO 8764	ISO 7046	ISO 7047	ISO 7045	ISO 7049	ISO 7050	ISO 7051			
			DIN 965	DIN 966	DIN 7985	DIN 7981	DIN 7982	DIN 7983	DIN 7995	DIN 7996	DIN 7997	
		Nm	M	M	M	B	B	B	H	H	H	No.
00	00	*	*	*	*	*	*	*	*	*	*	
0	0	1	1,6 1,8 2	1,6 1,8 2	1,6 1,8 2	2,2	2,2	2,2	2	2	2	0 – 1
1	1	3,9	2,5 3	2,5 3	2 2,5 3	2,2 2,9	2,2 2,9	2,2 2,9	2,5 3	2,5 3	2,5 3	2 – 4
2	2	10,3	3,5 4 5	3,5 4 5	3,5 4 5	3,5 3,9 4,2 4,8	3,5 3,9 4,2 4,8	3,5 3,9 4,2 4,8	3,5 4 4,5 5	3,5 4 4,5 5	3,5 4 4,5 5	5 – 10
3	3	32	6	6	6	5,5 6,3	5,5 6,3	5,5 6,3	5,5 6 7	5,5 6 7	5,5 6 7	12 – 16
4	4	88,7	8 10	8 10	8 10	8 9,5	8 9,5	8 9,5	8	8	8	18 – …

* Special screws

It all fits together...

TORX® screwdriver sockets

Size 1:1	TORX® Size	mm	Torque test Nm	Internal TORX® – Metric screws: Cheese head	Flat head	Oval head	Cheese head	Oval head	Flat head	Self tapping screws: Pan head	Flat head	Oval head
				ISO 4762 / DIN 912	ISO 7046 / DIN 963 / 965	ISO 7047 2010 / DIN 964 / 966	DIN 7984 / 6912	ISO 7045 / DIN 7985	ISO 10642 / DIN 7991	ISO 7049 / DIN 7981	ISO 7050 / DIN 7972 / 7982	ISO 7051 / DIN 7973 / 7983
	T 5	1,42	0,51	*	*	*	*	*	*	*	*	*
	T 6	1,70	0,9	*	2	*	*	*	*	*	2,2	*
	T 7	1,99	1,7	*	*	*	*	*	*	*	*	*
	T 8	2,31	2,6	2,5	2,5	2,5		2,5		2,9	2,9	2,9
	T 9	2,50	3,4									
	T 10	2,74	4,5	3	3	3	3	3	3	3,5	3,5	3,5
	T 15	3,27	7,7		3,5	3,5		3,5		3,9	3,9	3,9
	T 20	3,86	12,7	4	4	4	4	4	4	4,2	4,2	4,2
	T 25	4,43	19,0	5	5	5	5	5	5	4,8 5,5	4,8 5,5	4,8 5,5
	T 27	4,99	26,9	**	**	**	**	**	**	**	**	**
	T 30	5,52	37,4	6	6	6	6	6	6	6,3	6,3	6,3
	T 40	6,65	65,1		8				8			
	T 45	7,82	104	8	**	8	8	8	**	**	**	**
	T 50	8,83	159	10	10	10	10	10	10			
	T 55	11,22	257	12			12					
	T 60	13,25	446	14			14					

* Screws for tungsten carbide inserts

** Special screws

TORX® and TORX PLUS® are registered trademarks of Camcar, Div. of Textron Inc.

DIN screwdriver sockets

Torque test DIN 7426 Nm	Hex sockets – Metric screws: Cheese head ISO 4762 / DIN 912	with pivot DIN 6912	Cheese head DIN 7984	Flat head ISO 10642 / DIN 7991	Set ISO 4026 4029 / DIN 913 916	ISO 4027 / DIN 914	ISO 4028 / DIN 915
SW							
0,7					1,4	1,4	1,4
					1,6	1,6	1,6
					1,8	1,8	1,8
0,9					2	2	2
1,3	1,4				2,5	2,5	2,5
1,5	1,6-2				3	3	3
2	2,5		3	3	4	4	4
2,5	3		4	4	5	5	5
3	4	4	5	5	6	6	6
4	5	5	6	6	8	8	8
5	6	6	8	8	10	10	10
6	8	8		10	12	12	12
					14	14	14
7			10				
8	10	10	12	12	16	16	16
10	12	12	14	14	18	18	18
				16	20	20	20
12	14	14	16	18	22	22	22
			18	20	24	24	24

DIN nut drivers

SW	Torque test ISO 1711 Nm	Hex heads – Metric screws and nuts: Screws ISO 8100 / DIN 6921	Screws ISO 4016 / DIN 601	Screws ISO 4014 / DIN 931	Screws ISO 4017 / DIN 933	Nuts ISO 4035 4036 / DIN 439	Nuts ISO 4032 4033 / DIN 934	Screws: Self tapping ISO 1479 / DIN 7976	Wood screws DIN 571
	–						1		
							1,2		
3							1,4		
3,2	7,08			1,6	1,6	1,6	1,6	2,2	
3,5	8,26					1,8			
4	10,4			2	2	2	2		
4,5	12,6				2,3				
5	15,1			2,5	2,5	2,5	2,5	2,9	
5,5	17,8			3	3	3	3	3,5	
6	20,6			3,5	3,5	3,5	3,5		
7	26,8			4	4	4	4	3,9 4,2	4
8	33,6	5	5	5	5	5	5	4,8 5,5	5
9	41,1								
10	49,1	6	6	6	6	6	6	6,3	6
11	57,8			7	7		7		
12	67,0								7
13	68,6	8	8	8	8	8	8	8	8
14	68,6		–	–	–	–	–	–	–

	Index	
ISO	International standard	
DIN	German standard	
M	Metric screws	Thread diameter
M	Set screw metric	Thread diameter
M	Metric nut	Thread diameter
B	Self tapping screws	Thread diameter
H	Wood screws	Thread diameter

	Symbols
Tool drive = Screwdriver socket	
for screws with internal drive	
Tool drive = nutdriver socket	
for screws with head drive	

Wiha list of order numbers.

Order-No.	Series	Page
000...		
00057 8	129	33
00058 5	129	33
00059 2	129	33
00060 8	129	33
00097 4	148	25
00098 1	148	25
00099 8	148	25
001...		
00100 1	148	25
00101 8	148	25
00102 5	148	25
00103 2	148	25
00105 6	148 HK5	26
00108 7	148 ZK5	26
00109 4	153	25
00111 7	153	25
00112 4	153	25
00115 5	153	25
00116 2	153	25
00117 9	153	25
00119 3	153	25
00120 9	153	25
00144 5	161	109
00145 2	161	109
00146 9	161	109
00147 6	162	33
00151 3	162	33
00152 0	162	33
00153 7	162	33
00154 4	162	33
00156 8	162	33
00157 5	162	33
00158 2	162	33
00159 9	162	33
002...		
00201 5	186	25
00202 2	186	25
00203 9	186	25
00204 6	186	25
00206 0	186	25
00207 7	186	25
00208 4	186	25
00209 1	186	25
00210 7	186	25
00211 4	186	25
00212 1	186	25
00213 8	186	25
00214 5	186	25
00215 2	186	25
00218 3	186	25
00219 0	186	25
00220 6	186	25
00221 3	186	25
00222 0	186	25
00223 7	186	25
00226 8	186	25
00227 5	186	25
00229 9	186	25
00230 5	186	25
00231 2	186	25
00234 3	186	25
00235 0	186	25
00236 7	186	25
00237 4	186	25

Order-No.	Series	Page
003...		
00328 9	198-1	28
00373 9	207	109
00374 6	207	109
00375 3	207	109
00376 0	207	109
00377 7	207	109
00378 4	207	109
00379 1	207	109
004...		
00412 5	221	33
00413 2	221	33
00414 9	221	33
00416 3	222	25
00418 7	222	25
00422 4	222	25
00423 1	222	25
00426 2	222	25
00432 3	224	109
00433 0	224	109
00434 7	224	109
00451 4	255-1	239
00453 8	255-2	239
00454 5	255-3	240
00456 9	255-7L	240
00457 6	255-8L	240
00468 2	258-4	240
00472 9	258-4	240
00475 0	260P	35
00476 7	260P	35
00477 4	260P	35
00478 1	260P	35
00479 8	260P	35
00480 4	260P	35
00481 1	260P	35
00482 8	260P	35
00484 2	260P	35
00485 9	260P	35
00486 6	260P	35
00487 3	260P	35
00488 0	260P	35
00490 3	260P	35
00492 7	260P	35
00493 4	260P	35
00495 8	260P	35
00497 2	260P	35
00498 9	260P	35
00499 6	260P	35
005...		
00503 0	260P K6	38
00504 7	260P K7	38
00511 5	261P	35
00512 2	261P	35
00513 9	261P	35
00514 6	261P	35
00515 3	261P	35
00516 0	261P	35
00517 7	261P	35
00518 4	261P	35
00519 1	263P + Zoll	37
00520 7	263P + Zoll	37
00521 4	263P + Zoll	37
00522 1	263P	37
00523 8	263P + Zoll	37

Order-No.	Series	Page
00524 5	263P	37
00525 2	263P	37
00526 9	263P Zoll	37
00527 6	263P Zoll	37
00528 3	263P Zoll	37
00530 6	263P Zoll	37
00531 5	264P	37
00532 0	264P	37
00533 7	264P	37
00534 4	264P	37
00535 1	264P	37
00536 8	264P K6	39
00537 5	264P Zoll	37
00538 2	264P Zoll	37
00539 9	264P Zoll	37
00540 5	264P Zoll	37
00541 2	264P Zoll	37
00542 9	264P Zoll	37
00543 6	264P Zoll	37
00544 3	265P	37
00545 0	265P	37
00546 7	265P	37
00547 4	265P	37
00548 1	265P	37
00549 8	265P	37
00550 4	265P	37
00551 1	265P	37
00552 8	265P	37
00553 5	265P	37
00554 2	265P	37
00555 9	265P	37
00556 6	265P	37
00557 3	265P K6	39
00558 0	265P Zoll	37
00559 7	265P Zoll	37
00560 3	265P Zoll	37
00561 0	265P Zoll	37
00562 7	265P Zoll	37
00563 4	265P Zoll	37
00564 1	265P Zoll	37
00565 8	265P Zoll	37
00566 5	267P	36
00567 2	267P	36
00568 9	267P	36
00569 6	267P	36
00570 2	267P	36
00571 9	267P	36
00572 6	267P	36
00573 3	267P	36
00574 0	26810P	37
00576 4	269	64, 276
00577 1	269	64, 276
00578 8	269	64, 276
00579 5	269	64, 276
00580 1	269	64, 276
00582 5	269	65, 276
00583 2	269	65, 276
00584 9	269	65, 276
00585 6	269	65, 276
00586 3	269	65, 276
00587 0	269	65, 276
00588 7	269	65, 277
00589 4	269	65, 277
00590 0	269	65, 277
00591 7	269	65, 277
00592 4	269	65, 277

Order-No.	Series	Page
00593 1	269	65, 277
00594 8	269	65, 277
00595 5	269	65, 277
00596 2	269	65, 277
00597 9	269	65, 276
00598 6	269	65, 276
00599 3	269	65, 276
006...		
00600 6	269	65, 276
00601 3	269	64, 276
00602 0	269	64, 276
00603 7	269	64, 276
00610 5	269 T11	66
00613 6	269 T4	66
00616 7	269 T6	66
00623 5	281 B11	61
00629 7	284	58, 273
00630 3	284	58, 273
00631 0	284	58, 273
00632 7	284	58, 273
00635 8	284	58, 273
00636 5	284	58, 273
00637 2	284	58, 273
00638 9	284	58, 273
00639 6	284	58, 273
00654 9	284	58, 273
00655 6	284	58, 273
00656 3	284	58, 273
00657 0	284	58, 273
00658 7	284	58, 273
00665 5	284	58, 273
00666 2	284	58, 273
00667 9	284	58, 273
00679 2	300-2	27
00683 9	301-2	27
00684 6	302	11
00685 3	302	11
00686 0	302	11
00687 7	302	11
00689 1	302	11
00690 7	302	11
00691 4	302	11
00692 1	302	11
00694 5	302	11
00695 2	302	11
00696 9	302	11
00697 6	302	11
00698 3	302	11
007...		
00700 3	302	11
00701 0	302	11
00702 7	302	11
00703 4	302	11
00704 1	302	11
00706 5	302	11
00707 2	302	11
00708 9	302	11
00709 6	302	11
00711 9	302	11
00712 6	302	11
00713 3	302	11
00731 7	308	11
00732 4	308	11
00733 1	308	11

Order-No.	Series	Page
00734 8	308	11
00735 5	308	11
00736 2	308	11
00737 9	308	11
00738 6	308	11
00739 3	308	11
00740 9	308	11
00754 6	311	12
00756 0	311	12
00757 7	311	12
00759 1	311	12
00760 7	311	12
00762 1	311	12
00763 8	311	12
00764 5	312	12
00765 2	312	12
00766 9	312	12
00767 6	312	12
00768 3	313	12
00770 6	313	12
00772 0	313	12
00774 4	313	12
00776 8	314	12
00777 5	314	12
00778 2	314	12
00779 9	314	12
00782 9	320	238
00783 6	320	238
00784 3	320	238
00785 0	320	238
00786 7	320	238
00787 4	320	238
00788 1	320	238
00789 8	320	238
00790 4	320	238
00791 1	320	238
00792 8	320	238
00793 5	320	238
00794 2	320	238
00795 9	320	238
00796 6	320	238
00797 3	320	238
008...		
00815 4	320 K6	238
00819 2	320N	229
00820 8	320N	229
00821 5	320N	229
00822 2	320N	229
00823 9	320N	229
00824 6	320N	229
00825 3	320N	229
00826 0	320N	229
00827 7	320N	229
00828 4	320N	229
00829 1	320N	229
00830 7	320N	229
00831 4	320N	229
00832 1	320N	229
00833 8	320N K6	232
00834 5	320N K7	233
00836 9	321	238
00837 6	321	238
00838 3	321	238
00839 0	321	238
00840 6	321	238
00846 8	321N	229

Order-No.	Series	Page
00847 5	321N	229
00848 2	321N	229
00849 9	321N	229
00850 5	321N	229
00853 6	322	231
00855 0	322	231
00856 7	322	231
00857 4	322	231
00858 1	322	231
00859 8	322	231
00860 4	322	231
00861 1	322	231
00862 8	322	231
00863 5	322	231
00864 2	322	231
00865 9	322	231
00866 6	322	231
00867 3	322	231
00868 0	322	231
00877 2	324	229
00878 9	324	229
00879 6	324	229
00880 2	324	229
00881 9	325	230
00882 6	325	230
00883 3	325	230
00884 0	325	230
00885 7	325	230
00886 4	325	230
00887 1	325	230
00888 8	325	230
00889 5	325	230
00894 9	331	108
00895 6	331	108
00896 3	331	108
00897 0	331	108
009...		
00904 5	334	104
00905 2	334	104
00906 9	334	104
00907 6	334	104
00908 3	334	104
00909 0	334	104
00910 6	334	104
00911 3	334	104
00912 0	334	104
00913 7	334	104
00914 4	334	104
00915 1	334	104
00916 8	334	104
00917 5	334	104
00918 2	334	104
00919 9	334	104
00921 2	334	104
00922 9	334	104
00923 6	334	104
00924 3	334	104
00926 7	334	104
00928 1	334	104
00929 8	334	104
00930 4	334	104
00931 1	334	104
00933 5	334	104
00934 2	334	104
00937 3	334	104
00953 3	334 VB	104

Order-No.	Series	Page
00965 6	336	104
00966 3	336	104
00967 0	336	104
00968 7	336	104
00969 4	336	104
00970 0	336	104
00971 7	336	104
00972 4	336	104
00973 1	336	104
00974 8	336	104
00975 5	336	104
00977 9	336	104
00978 6	336	104
00979 3	336	104
00980 9	336	104
00982 3	336	104
00983 0	336	104
00985 4	336	104
00986 1	336	104
00988 5	336	104
00989 2	336	104
00990 8	336	104
00991 5	336	104
00993 9	336	104
00994 6	336	104
00995 3	336	104
010...		
01005 8	338	105
01006 5	338	105
01007 2	338	105
01008 9	338	105
01018 8	341	16
01020 1	341	16
01021 8	341	16
01022 5	341	16
01023 2	341	16
01024 9	341	16
01025 6	341	16
01026 3	341	16
01027 0	341	16
01028 7	341	16
01029 4	341	16
01030 0	341	16
01031 7	341	16
01032 4	341	16
01033 1	341	16
01034 8	341 K 5	18
01051 5	342	26
01053 9	342	26
01054 6	342	26
01055 3	342	26
01056 0	342	26
01057 7	342	26
01058 4	342	26
01059 1	342	26
01060 7	342	26
01061 4	342	26
01062 1	342	26
01063 8	342	26
01064 5	342	26
01065 2	342	26
01076 8	343	16
01077 5	343	16
01078 2	343	16
01079 9	343	16
01081 2	343	16
01092 8	347	16
01093 5	347	16
01094 2	347	16
01095 9	347	16

Order-No.	Series	Page
01096 6	347	16
01097 3	347	16
01098 0	347	16
011...		
01121 5	350	83
01122 2	350	83
01123 9	350	83
01124 6	350	83
01126 0	350	83
01128 4	350	83
01130 7	350	83
01131 4	350	83
01132 1	350	83
01133 8	350	83
01134 5	350	83
01135 2	350	83
01136 9	350	83
01137 6	350	83
01138 3	350	83
01139 0	350	83
01140 6	350	83
01141 3	350	83
01142 0	350	83
01143 7	350	83
01144 4	351	82
01145 1	351	82
01146 8	351	82
01147 5	351	82
01148 2	351	82
01149 9	351	82
01150 5	351	82
01151 2	351	82
01152 9	351	82
01153 6	351	82
01154 3	351	82
01155 0	351	82
01156 7	351	82
01157 4	351	82
01158 1	351	82
01159 8	351	82
01160 4	351	82
01161 1	351	82
01162 8	351	82
01166 6	351 B8	82
01172 7	351 H7	82
01174 1	351 H9	82
01176 5	351 HZ8	85
01180 2	351 R8	82
01182 6	351 VB	83
01184 0	351 Zoll	85
01185 7	351 Zoll	85
01186 4	351 Zoll	85
01187 1	351 Zoll	85
01188 8	351 Zoll	85
01189 5	351 Zoll	85
01190 1	351 Zoll	85
01191 8	351 Zoll	85
01192 5	351 Zoll	85
01193 2	351 Zoll	85
01194 9	351 Zoll	85
01195 6	351 Zoll	85
01197 0	351 Zoll	85
01198 7	351 Zoll	85
012...		
01200 7	351 Zoll	85
01201 4	352	80
01202 1	352	80
01203 8	352	80
01204 5	352	80

Order-No.	Series	Page
01206 9	352	80
01207 6	352	80
01208 3	352	80
01209 0	352	80
01210 6	352	80
01211 3	352	80
01212 0	352	80
01213 7	352	80
01214 4	352	80
01215 1	352	80
01216 8	352 B8	80
01220 5	352 H7	80
01222 9	352 H9	80
01224 3	353	26
01225 0	353	26
01226 7	353	26
01227 4	353	26
01228 1	353	26
01229 8	353	26
01243 4	355	93
01244 1	355	93
01245 8	355	93
01246 5	355	93
01247 2	355	93
01248 9	355	93
01249 6	355	93
01255 7	359	83
01256 4	359	83
01257 1	359	83
01258 8	359	83
01259 5	359	83
01260 1	359	83
01261 8	359	83
01262 5	359	83
01263 2	359	83
01264 9	360	25
01266 3	360	25
01267 0	360	25
01268 7	360	25
01269 4	360	25
01270 0	360	25
01271 7	360	25
01285 4	362	14
01286 1	362	14
01287 8	362	14
01288 5	362	14
01289 2	362	14
01290 8	362	14
01291 5	362	14
01292 2	362	14
01293 9	362	14
01294 6	362	14
01295 3	362	14
01296 0	362	14
01297 7	362	14
01299 1	362 K7	19
013...		
01300 4	362TR	14
01301 1	362TR	14
01302 8	362TR	14
01303 5	362TR	14
01304 2	362TR	14
01305 9	362TR	14
01306 6	362TR	14
01310 3	363	92
01311 0	363	92
01312 7	363	92
01313 4	363	92
01314 1	363	92
01315 8	363	92

Order-No.	Series	Page
01316 5	363	92
01317 2	363	92
01318 9	363	92
01319 6	363	92
01320 2	363	92
01321 9	363	92
01322 6	363	92
01323 3	363	92
01324 0	363	92
01326 4	363 VB	92
01328 8	364	106
01329 5	364	106
01330 1	364	106
01331 8	364	106
01332 5	364	106
01333 2	364	106
01334 9	364	106
01335 6	364	106
01336 3	364	106
01337 0	364	106
01338 7	364	106
01339 4	364	106
01340 0	364	106
01341 7	364	106
01343 1	364	106
01345 5	364	106
01348 6	364 VB	106
01350 9	365	108
01351 6	365	108
01352 3	365	108
01353 0	365	108
01354 7	365	108
01355 4	365	108
01356 1	365	108
01391 2	369B	78
01392 9	369	77
01393 6	369	77
01395 0	369	77
01396 7	369	77
01398 1	369	77
014...		
01400 1	369	77
01402 5	369	77
01404 9	369	77
01406 3	369	77
01408 7	369	77
01410 0	369 B8	78
01416 2	369 H7	78
01418 6	369 H9	78
01420 9	369 HZ8	84
01422 3	369 Zoll	84
01423 0	369 Zoll	84
01424 7	369 Zoll	84
01425 4	369 Zoll	84
01426 1	369 Zoll	84
01427 8	369 Zoll	84
01428 5	369 Zoll	84
01429 2	369 Zoll	84
01430 8	369 Zoll	84
01431 5	369 Zoll	84
01432 2	369 Zoll	84
01433 9	369 Zoll	84
01434 6	369 Zoll	84
01435 3	372	16
01436 0	372	16
01437 7	372	16
01438 4	372	16
01439 1	372	16
01440 7	372	16
01443 8	372	16

Order-No.	Series	Page
01475 9	384	150
01476 6	384	150
01479 7	386	150
01481 0	388	150
015...		
01508 4	400 10	29
01531 2	K 430 10	27
01532 9	K 430 20	27
01537 4	500	28
01538 1	500	28
01539 8	500	28
01548 0	509	28
016...		
01604 3	7010 Z L	123
01606 7	7010 Z L	123
01607 4	7010 Z L	123
01609 8	7010 Z L	123
01610 4	7010 Z L	123
01612 8	7010 Z L	123
01613 5	7010 Z L	123
01617 3	7010 Z L	123
01619 7	7010 Z L	123
01621 0	7010 Z L	123
01623 4	7010 Z	123
01624 1	7010 Z	123
01626 5	7010 Z	123
01627 2	7010 Z	123
01649 4	7011 Z	123
01657 9	7011 Z	123
01658 6	7011 Z	123
01659 3	7011 Z	123
01681 4	7012 Z	123
01688 3	7012 Z	123
01689 0	7012 Z	123
01690 6	7012 Z	123
017...		
01703 3	7013 Z	125
01704 0	7013 Z	125
01705 7	7013 Z	125
01706 4	7013 Z	125
01707 1	7013 Z	125
01708 8	7013 Z	125
01709 5	7013 Z	125
01710 1	7013 Z	125
01711 8	7015 Z	124
01712 5	7015 Z	124
01713 2	7015 Z	124
01714 9	7015 Z	124
01715 6	7015 Z	124
01716 3	7015 Z	124
01717 0	7015 Z	124
01718 7	7015 Z	124
01719 4	7015 Z	124
01720 0	7015 Z	124
01721 7	7015 Z	124
01722 4	7015 Z	124
01723 1	7015 Z	124
01724 8	7015 Z	124
01726 2	7015 Z TR	124
01727 9	7015 Z TR	124
01728 6	7015 Z TR	124
01729 3	7015 Z TR	124
01730 9	7015 Z TR	124
01731 6	7015 Z TR	124
01732 3	7015 Z TR	124
01733 0	7015 Z TR	124
01734 7	7017 Z	125
01735 4	7017 Z	125
01736 1	7017 Z	125

Order-No.	Series	Page
01737 8	7017 Z	125
01738 5	7017 Z	125
01739 2	7017 Z	125
01740 8	7017 Z	125
01741 5	7020 Z	136
01742 2	7020 Z	136
01744 6	7020 Z	136
01745 3	7020 Z	136
01746 0	7020 Z	136
01747 7	7020 Z	136
01748 4	7020 Z	136
01749 1	7021 Z	136
01750 7	7021 Z	136
01751 4	7021 Z	136
01753 8	7021 Z	136
01754 5	7022 Z	136
01755 2	7022 Z	136
01756 9	7022 Z	136
01758 3	7022 Z	136
01759 0	7023 Z	136
01760 6	7023 Z	136
01761 3	7023 Z	136
01762 0	7023 Z	136
01763 7	7023 Z	136
01764 4	7023 Z	136
01765 1	7025 Z	136
01766 8	7025 Z	136
01767 5	7025 Z	136
01768 2	7025 Z	136
01769 9	7025 Z	136
01770 5	7025 Z	136
01771 2	7025 Z	136
01790 3	7040 Z	128
01791 0	7040 Z	128
01792 7	7040 Z	128
01793 4	7040 Z	128
01794 1	7040 Z	128
01795 8	7040 Z	128
01796 5	7040 Z	128
01798 9	7040 Z	128
01799 6	7040 Z	128
018...		
01800 9	7040 Z	128
01803 0	7041 Z	128
01805 4	7041 Z	128
01808 5	7042 Z	128
01809 2	7042 Z	128
01811 5	7042 Z	128
01812 2	7042 Z	128
01894 8	7113	149
01895 5	7113 S	149
019...		
01910 5	7140	148
01912 9	7142	148
01913 6	7143	148
01919 8	7183	136, 149
01922 8	7201	144
01923 5	7201	144
01924 2	7201	144
01926 6	7201	144
01927 3	7201	144
01933 4	7210	144
01934 1	7230	144
01935 8	7240	144
01936 5	7280	144
01937 2	7311 Z	132
01938 9	7311 Z	132
01939 6	7312 Z	132
01940 2	7312 Z	132

Wiha list of order numbers.

Order-No.	Series	Page
01942 6	7321 Z	132
01943 3	7321 Z	132
01945 7	7322 Z	132
01946 4	7322 Z	132
01947 1	7341 Z	132
01948 8	7342 Z	132
02...		
02091 0	800	213
02092 7	800	213
02093 4	800	213
02094 1	800	213
02095 8	800	213
02096 5	800	213
02097 2	800	213
02098 9	800	213
02099 6	800	213
02101 6	800	213
02102 3	800K	213
02103 0	800K	213
02104 7	800K	213
02105 4	800K	213
02106 1	800K	213
02107 8	800K	213
02108 5	800K	213
02109 2	800K	213
02110 8	800K	213
02111 5	800K	213
02113 9	800S	213
02114 6	800S	213
02115 3	800S	213
02116 0	800S	213
02117 7	800S	213
02122 1	802	213
02123 8	802	213
02124 5	802	213
02125 2	802	213
02126 9	802	213
02127 6	802	213
02128 3	802	213
02129 0	802	213
02163 4	270	271
02164 1	270	271
02167 2	270	271
02168 9	270	271
02169 6	271	271
02171 9	270 HK3	271
02292 1	SB 369 H9	78
02568 7	SB 400 10	29
02802 2	334 Zoll	105
02803 9	334 Zoll	105
02804 6	334 Zoll	105
02805 3	334 Zoll	105
02806 0	334 Zoll	105
02807 7	334 Zoll	105
02808 4	334 Zoll	105
02809 1	334 Zoll	105
02810 7	334 Zoll	105
02811 4	334 Zoll	105
02819 0	336 Zoll	105
02820 6	336 Zoll	105
02821 3	336 Zoll	105
02822 0	336 Zoll	105
02823 7	336 Zoll	105
02824 4	336 Zoll	105
02836 7	347 Zoll	16
02837 4	347 Zoll	16

Order-No.	Series	Page
02838 1	347 Zoll	16
02839 8	347 Zoll	16
02840 4	347 Zoll	16
02841 1	347 Zoll	16
02939 5	SB 369 HZ8	84
03...		
03106 0	362 TR	14
03107 7	362 TR	14
03108 4	362 TR	14
03115 2	7015 Z TR	124
03117 6	7015 Z TR	124
03186 2	269	64, 276
03223 4	530	11
03224 1	530	11
03225 8	530	11
03226 5	530	11
03228 9	530	11
03230 2	530	11
03231 9	530	11
03232 6	530	11
03237 1	531	12
03238 8	531	12
03239 5	531	12
03245 6	532	12
03246 3	532	12
03247 0	532	12
03591 4	281 T11	62
03723 9	SB 369 H7	78
03724 6	370	109
03725 3	370	109
03726 0	370	109
03727 7	370	109
03728 4	370	109
03729 1	370	109
03730 7	370	109
03731 4	370	109
03734 5	SB 351 H9	82
03738 3	311	12
03739 0	311	12
03742 0	371RIP H8	88
03760 4	325	230
03761 1	325	230
03762 8	325	230
03763 5	325	230
03764 2	363	92
03765 9	267P K6	38
03767 3	282	57
03773 4	282 B11-1	61
03868 7	369B	78
03869 4	369B	78
03870 0	369B	78
03871 7	369B	78
03872 4	369B	78
03873 1	369B	78
03874 8	369B	78
03875 5	369B	78
03876 2	369B	78
03878 6	369 H7B	79
03879 3	369 H9B	79
03882 3	7802	59, 274
03883 0	7803	59, 274
03988 2	405 11	28
03991 2	SB 369 H7B	79
03992 9	SB 369 H9B	79

Order-No.	Series	Page
04...		
04009 3	7041 Z	128
04010 9	7041 Z	128
04011 6	7013 Z	125
04059 8	7042 Z	128
04096 3	540	103
04099 4	540	103
04105 2	540	103
04108 3	540	103
04111 3	540	103
04126 7	7041 Z	128
04127 4	7041 Z	128
04176 2	7042 Z	128
04194 6	7043 Z	131
04195 3	7043 Z	131
04196 0	7043 Z	131
04197 7	7043 Z	131
04198 4	7043 Z	131
04204 2	7210	144
04362 9	7240	144
04461 9	262P	35
04462 6	262P	35
04481 7	7012 HOT	118
04482 4	7012 HOT	118
04483 1	7012 HOT	118
04484 8	7011 HOT	118
04485 5	7011 HOT	118
04486 2	7011 HOT	118
04508 1	7044	143
04509 8	7044	143
04510 4	7044	143
04511 1	7044	143
04512 8	7044	143
04513 5	7044	143
04514 2	7044	143
04515 9	7044	143
04516 6	7044	143
04517 3	7044	143
04539 5	7041 ZOT	120
04540 1	7041 ZOT	120
04541 8	7041 ZOT	120
04542 5	7041 HOT	118
04543 2	7041 HOT	118
04544 9	7041 HOT	118
04545 6	7042 ZOT	120
04546 3	7042 ZOT	120
04547 0	7042 ZOT	120
04548 7	7042 HOT	118
04549 4	7042 HOT	118
04550 0	7042 HOT	118
04551 7	7082 ZOT	136
04552 4	7082 ZOT	136
04553 1	7082 ZOT	136
04631 6	7044 M	143
04632 3	7044 M	143
04633 0	7044 M	143
04634 7	7044 M	143
04635 4	7044 M	143
04636 1	7044 M	143
04637 8	7044 M	143
04638 5	7044 M	143
04639 2	7044 M	143
04640 8	7044 M	143
04654 5	7011 TiN	117
04655 2	7011 TiN	117
04656 9	7011 TiN	117

Order-No.	Series	Page
04657 6	7012 TiN	117
04658 3	7012 TiN	117
04659 0	7012 TiN	117
04670 5	7332 Z	132
04671 2	7332 Z	132
04677 4	7331 Z	132
04678 1	7331 Z	132
04684 2	7240	144
04685 9	7240	144
04689 7	7012 ZOT L	119
04691 0	7012 ZOT L	119
04693 4	7012 ZOT L	119
04695 8	7011 ZOT L	119
04697 2	7011 ZOT L	119
04699 6	7011 ZOT L	119
04711 5	7005 Z	134
04712 2	7005 Z	134
04713 9	7005 Z	134
04714 6	7005 Z	134
04715 3	7005 Z	134
04716 0	7005 Z	134
04717 7	7001 Z	134
04718 4	7001 Z	134
04719 1	7001 Z	134
04720 7	7001 Z	134
04721 4	7000 Z	134
04722 1	7000 Z	134
04723 8	7000 Z	134
04724 5	7000 Z	134
04725 2	7000 Z	134
04726 9	7000 Z	134
04727 6	7000 Z	134
04728 3	7000 Z	134
04729 0	7000 Z	134
04730 6	7003 Z	134
04731 3	7003 Z	134
04732 0	7003 Z	134
04733 7	7003 Z	134
04734 4	7003 Z	134
04735 1	7003 Z	134
04736 8	7003 Z	134
04737 5	7003 Z	134
04743 6	7010 TiN	117
04744 3	7010 TiN	117
04745 0	7010 TiN	117
04746 7	7010 TiN	117
04861 7	7041 TiN	117
04862 4	7041 TiN	117
04863 1	7041 TiN	117
04864 8	7042 TiN	117
04865 5	7042 TiN	117
04866 2	7042 TiN	117
04918 8	365	108
04919 5	7011 ACR	119
04920 1	7011 ACR	119
04921 8	7011 ACR	119
04922 5	7012 ACR	119
04923 2	7012 ACR	119
04924 9	7012 ACR	119
04925 6	7015K Z	124
04926 3	7015K Z	124
04927 0	7015K Z	124
04928 7	7015K Z	124
04929 4	7015K Z	124
04930 0	7015K Z	124
04931 7	7015K Z	124

Order-No.	Series	Page
04960 7	7081 ZOT	136
04961 4	7081 ZOT	136
04962 1	7081 ZOT	136
05...		
05069 6	7012 ZOT	119
05074 0	7012 ZOT	119
05075 7	7012 ZOT	119
05076 4	7011 ZOT	119
05077 1	7011 ZOT	119
05269 0	255-1L	239
05270 6	255-2L	239
05271 3	255-3L	240
05280 5	360	25
05288 1	7010 ZOT	119
05289 8	7010 ZOT	119
05290 4	7010 ZOT	119
05292 8	7010 ZOT	119
05293 5	7010 ZOT	119
05295 9	7010 HOT	118
05296 6	7010 HOT	118
05298 0	7011 Z	123
05299 7	7011 ZOT	119
05300 0	7012 Z	123
05301 7	7043 Z	131
05302 4	7043 Z	131
05303 1	7043 Z	131
05638 4	369B	78
05672 8	SB 282 122	61
05799 2	7042 Z	128
05800 5	7041 Z	128
06...		
06059 6	352B	81
06218 7	350	83
06358 0	352B	81
06359 7	352B	81
06360 3	352B	81
06361 0	352B	81
06362 7	352B	81
06363 4	352B	81
06364 1	352B	81
06365 8	352B	81
06366 5	352B	81
06367 2	352B	81
06368 9	352B	81
06369 6	352B	81
06370 2	352B	81
06371 9	352B	81
06374 0	363 H6	92
06375 7	363 HM7	92
06376 4	363 H9	92
06378 8	350 H7	83
06379 5	350 H9	83
06382 5	352 HM5B	81
06384 9	352 H7B	81
06386 3	352 H9B	81
06568 3	320	238
06569 0	320	238
06570 6	320	238
06571 3	320	238
06573 7	320	238
06634 5	7018 Z	126
06635 2	7018 Z	126
06636 9	7018 Z	126
06637 6	7048 Z	131

Order-No.	Series	Page
06638 3	7048 Z	131
06639 0	7048 Z	131
06888 2	7041 Z	128
06889 9	7042 Z	128
07...		
07149 3	162 HK6 SO	33
07150 9	162 ZK6 SO	33
07151 6	320 P7 SO	238
07152 3	302 HK6 SO	17
07153 0	302 ZK6 SO	17
07155 4	362 K6 SO	19
07181 3	352 S9	80
07185 1	369 S9	77
07186 8	369 S9B	79
07190 5	SB 352 S9	80
07192 9	SB 369 S9	77
07193 6	SB 369 S9B	79
07194 3	369 SVH1	77
07195 0	369 SVH1B	79
07634 4	272	268
07635 1	272	268
07636 8	272	268
07637 5	272	268
07638 2	272	268
07639 9	272	268
07640 5	273	268
07641 2	273	268
07642 9	273	268
07643 6	274	268
07644 3	275	268
07645 0	275	268
07646 7	275	268
07647 4	275	268
07648 1	275	268
07649 8	276	268
07650 4	276	268
07651 1	276	268
07652 8	276	268
07653 5	277	268
07654 2	277	268
07655 9	277	268
07656 6	277	268
07657 3	277	268
07658 0	277	268
07659 7	278	269
07660 3	278	269
07661 0	278	269
07662 7	278	269
07663 4	278	269
07664 1	278	269
07665 8	278	269
07666 5	278	269
07667 2	279-10	269
07821 8	SB 7011	167
07828 7	SB 7011	167
07846 1	SB 7011	167
07847 8	SB 7011	167
07848 5	SB 7012	168
07849 2	SB 7012	168
07850 8	SB 7012	168
07851 5	SB 7012	168
07855 3	SB 7011	167
07856 0	SB 7011	167
07857 7	SB 7011	167
07858 4	SB 7011	167
07859 1	SB 7012	168

Order-No.	Series	Page
07860 7	SB 7012	168
07861 4	SB 7012	168
07862 1	SB 7012	168
07863 8	SB 7010	167
07864 5	SB 7010	167
07865 2	SB 7013	169
07866 9	SB 7013	169
07869 0	SB 7113	171
07870 6	SB 7015	168
07871 3	SB 7015	168
07872 0	SB 7015	168
07873 7	SB 7015	168
07874 4	SB 7045 Z	170
07875 1	SB 7045 Z	170
07876 8	SB 7011	167
07877 5	SB 7011	167
07878 2	SB 7011	167
07879 9	SB 7011	167
07880 5	SB 7012	168
07881 2	SB 7012	168
07882 9	SB 7012	168
07883 6	SB 7012	168
07887 4	SB 7041	169
07888 1	SB 7042	169
07922 2	369	77
07943 7	7928-923	163
08...		
08047 1	7929 Z	165
08048 8	7929 Z	165
08049 5	7929 Z	165
08050 1	7929 HOT	165
08051 8	7929 HOT	165
08052 5	7929 HOT	165
08053 2	7929 TiN	164
08054 9	7929 TiN	164
08055 6	7929 TiN	164
08056 3	7929 Z	165
08057 0	7929 Z	165
08058 7	7929 Z	165
08059 4	7929 HOT	165
08060 0	7929 HOT	165
08061 7	7929 HOT	165
08062 4	7929 TiN	164
08063 1	7929 TiN	164
08064 8	7929 TiN	164
08065 5	7929 Z	165
08066 2	7929 Z	165
08067 9	7929 Z	165
08068 6	7929 Z	165
08069 3	7929 Z	165
08070 9	7929 Z	165
08161 4	SB 369	77
08162 1	SB 369	77
08163 8	SB 369	77
08164 5	SB 369	77
08165 2	SB 369	77
08166 9	SB 369	77
08167 6	SB 369	77
08168 3	SB 369	77
08169 0	SB 369	77
08170 6	SB 369	77
08179 9	302ESD	265
08182 9	302ESD	265
08183 6	302ESD	265
08184 3	311ESD	265
08185 0	311ESD	265
08186 7	311ESD	265
08419 6	SB 7040	169
08420 2	SB 7040	169
08421 9	SB 7015	168

Order-No.	Series	Page
08422 6	SB 7015	168
08423 3	SB 7015	168
08424 0	SB 7015	168
08425 7	SB 7015	168
08426 4	SB 7015	168
08427 1	SB 7240	171
08453 0	SB 7010	167
08454 7	SB 7010	167
08455 4	SB 7010	167
08461 5	7012 Inkra	121
08463 9	272 K6	270
08921 4	U109 00	59, 274
09...		
09195 8	U759 00	65, 135
09393 8	7928-928	163
09400 3	9246 01	146
09495 9	SB 7010	167
09496 6	SB 7010	167
20...		
20122 7	267P	36
20123 4	267P	36
20218 7	7045 Z TR	130
20219 4	7045 Z TR	130
20220 0	7045 Z TR	130
20221 7	7045 Z TR	130
20222 4	7045 Z TR	130
20223 1	7045 Z TR	130
20224 8	7045 Z TR	130
20542 3	SB 7012	168
20549 2	369R	75
20550 8	369R	75
20551 5	369R	75
20552 2	369R	75
20553 9	369R	75
20554 6	SB 246 01	146
20570 6	369R	75
20709 0	369R S9	75
20712 0	SB 369R S9	75
20783 0	SB 246 02	146
20814 1	SB 7011	167
20818 9	SB 7011	167
20820 2	SB 7012	168
20822 6	SB 7012	168
20824 0	SB 7012	168
20827 1	SB 7012	168
20834 9	7011 Inkra	121
20842 7	7005 Z	134
20843 1	7005 Z	134
20940 7	7015 ZOT	119
20942 1	7015 ZOT	119
20945 2	7015 ZOT	119
20946 9	7015 ZOT	119
20948 3	7015 ZOT	119
20950 6	7015 ZOT	119
20952 0	7015 ZOT	119
20954 4	7015 ZOT	119
20956 8	7015 ZOT	119
20958 2	7015 ZOT	119
20960 5	7015 ZOT	119
20964 3	7015 TiN	117
20966 7	7015 TiN	117
20968 1	7015 TiN	117
20970 4	7015 TiN	117
20972 8	7015 TiN	117
20974 2	7015 TiN	117
20976 6	7015 TiN	117
20978 0	7015 TiN	117
20980 3	7015 TiN	117
20982 7	7015 TiN	117
20984 1	7015 TiN	117

Order-No.	Series	Page
21...		
21045 8	7045 Z TR	130
21047 2	7045 Z TR	130
21193 6	7011 Dia	115
21194 3	7011 Dia	115
21196 7	7011 Dia	115
21198 1	7012 Dia	115
21200 1	7012 Dia	115
21202 5	7012 Dia	115
21204 9	7015 Dia	115
21206 3	7015 Dia	115
21208 7	7015 Dia	115
21210 0	7015 Dia	115
21212 4	7015 Dia	115
21214 8	7015 Dia	115
21216 2	7010 Dia	115
21220 9	7010 Dia	115
21228 5	7011 Inkra	121
21229 2	7011 Inkra	121
21231 5	7012 Inkra	121
21233 9	7012 Inkra	121
21248 3	308 HK6	18
21249 0	308 ZK6	18
21250 6	530 HK6	18
21251 3	530 ZK6	18
21255 1	278	269
21256 8	278	269
21272 8	7010 Dia	115
21960 4	334R	103
21962 8	334R	103
22...		
22096 9	334R VB	103
22107 2	SB 7011	167
22109 6	SB 7011	167
22111 9	SB 7011	167
22113 3	SB 7011	167
22115 7	SB 7012	168
22117 1	SB 7012	168
22119 5	SB 7012	168
22121 8	SB 7012	168
22123 2	SB 7015	168
22125 6	SB 7015	168
22127 0	SB 7015	168
22129 4	SB 7015	168
22131 7	SB 7015	168
22133 1	SB 7015	168
22168 3	334R	103
22170 6	334R	103
22172 0	334R	103
22174 4	334R	103
22318 2	SB 7011	167
22320 5	SB 7011	167
22322 9	SB 7011	167
22324 3	SB 7012	168
22326 7	SB 7012	168
22328 1	SB 7012	168
22406 6	351 Zoll	85
22436 3	362ESD	266
22509 4	7041 Z	128
22510 0	7041 Z	128
22511 7	7041 Z	128
22512 4	7042 Z	128
22591 9	7019 ZOT TS	120
22592 6	7019 ZOT TS	120
22593 3	7019 ZOT TS	120
22594 0	7019 ZOT TS	120
22595 7	7019 ZOT TS	120
22596 4	7049 ZOT TS	120
22597 1	7049 ZOT TS	120
22598 8	7049 ZOT TS	120

Order-No.	Series	Page
22599 5	7049 ZOT TS	120
22600 8	7049 ZOT TS	120
22603 9	7019 ZOT TW	120
22604 6	7019 ZOT TW	120
22605 3	7019 ZOT TW	120
22606 0	7019 ZOT TW	120
22607 7	7019 ZOT TW	120
22608 4	7019 ZOT TW	120
22609 1	7049 ZOT TW	120
22610 7	7049 ZOT TW	120
22611 4	7049 ZOT TW	120
22612 1	7049 ZOT TW	120
22640 4	SB 7015	168
22641 1	SB 7015	168
22643 5	SB 7015	168
22645 9	SB 7015	168
22647 3	SB 7012	168
22649 7	SB 7011	167
22651 0	SB 7017	169
22653 4	SB 7017	169
22655 8	SB 7017	169
22955 9	7013R Z	125
22956 6	7013R Z	125
22957 3	7013R Z	125
22958 0	7013R Z	125
22959 7	7017R Z	125
22960 3	7017R Z	125
22961 0	7017R Z	125
22962 7	7017R Z	125
23...		
23031 9	369R P7	95
23033 3	SB 369R P7	95
23035 7	351 PK7	95
23037 1	SB 351 PK7	95
23040 1	351 PG7	95
23041 8	SB 351 PG7	95
23047 0	363 P8	96
23049 4	SB 363 P8	96
23051 7	363 P7	96
23053 1	SB 363 P7	96
23104 0	7010 DR	113
23106 4	7010 DR	113
23110 1	7010 DR	113
23114 9	7011 DR	113
23116 3	7011 DR	113
23118 7	7011 DR	113
23120 0	7012 DR	113
23122 4	7012 DR	113
23124 8	7012 DR	113
23133 0	7015 DR	113
23135 4	7015 DR	113
23137 8	7015 DR	113
23139 2	7015 DR	113
23141 5	7015 DR	113
23143 9	7015 DR	113
23145 3	7043R Z	131
23147 7	7043R Z	131
23149 1	7043R Z	131
23151 4	7043R Z	131
23159 0	430 40	31
23173 6	7016 Z	124
23175 0	7016 Z	124
23177 4	7016 Z	124
23179 8	7016 Z	124
23181 1	7016 Z	124
23183 5	7016 Z	124
23185 9	7016 Z	124
23187 3	7016 Z	124
23189 7	7016 Z	124

Order-No.	Series	Page
23191 0	7016 Z	124
23193 4	7016 Z	124
23195 8	7046 Z	130
23197 2	7046 Z	130
23199 6	7046 Z	130
23201 6	7046 Z	130
23203 0	7046 Z	130
23205 4	7046 Z	130
23207 8	7046 Z	130
23209 2	7046 Z	130
23211 5	7046 Z	130
23213 9	7041 Z	128
23215 3	7041 Z	128
23217 7	7041 Z	128
23219 1	7041 Z	128
23221 4	7042 Z	128
23223 8	7042 Z	128
23225 2	7042 Z	128
23226 9	7042 Z	128
23227 6	7042 Z	128
23228 3	7042 Z	128
23265 8	369R SVH1	75
23376 1	7041 Dia	115
23378 5	7041 Dia	115
23380 8	7041 Dia	115
23382 2	7042 Dia	115
23384 6	7042 Dia	115
23386 0	7042 Dia	115
23388 4	7041 DR	113
23390 7	7041 DR	113
23392 1	7041 DR	113
23394 5	7042 DR	113
23396 9	7042 DR	113
23398 3	7042 DR	113
23502 4	351 PG7 VH1	97
23503 1	363 P8 VH1	97
24...		
24002 8	267P K6M	38
24105 6	363TR	93
24107 0	363TR	93
24109 4	363TR	93
24111 7	363TR	93
24113 1	363TR	93
24115 5	363TR	93
24117 9	363TR	93
24119 3	363TR	93
24121 6	363TR	93
24123 0	363TR	93
24189 6	369 SZ13B	84
24190 2	369R SZ13	76
24267 1	SB 7011	167
24269 5	SB 7011	167
24271 8	SB 7012	168
24273 2	SB 7012	168
24302 9	369R Zoll	76
24303 6	369R Zoll	76
24304 3	369R Zoll	76
24305 0	369R Zoll	76
24306 7	369R Zoll	76
24307 4	369R Zoll	76
24308 1	369R Zoll	76
24312 8	366 SZ13	91
24313 5	366	91
24314 2	366	91
24315 9	366	91
24316 6	366	91
24317 3	366	91
24318 0	366	91
24319 7	366	91
24320 3	366	91

Order-No.	Series	Page
24321 0	366	91
24322 7	366	91
24323 4	366	91
24324 1	366	91
24325 8	366	91
24341 8	369R Zoll	76
24492 7	400 12	29
24506 1	362TR K6	19
24513 9	361IP	93
24515 3	361IP	93
24517 7	361IP	93
24519 1	361IP	93
24521 4	361IP	93
24523 8	361IP	93
24525 2	361IP	93
24527 6	361IP	93
24529 0	361IP	93
24531 3	361IP	93
24533 7	361IP	93
24713 3	SB 7010	167
24727 0	SB 7041	169
24733 1	SB 7011	167
24738 6	SB 7042	169
24742 3	SB 7012	168
24746 1	SB 7015	168
24748 5	SB 7015	168
24750 8	SB 7015	168
24752 2	SB 7011	167
24770 6	7149	148
24778 2	SB 7149	170
24850 5	SB 369R SZ13	76
24851 2	SB 369 SZ13	84
24852 9	SB 366 SZ13	91
24859 8	351 PK6X	96
24861 1	SB 351 PK6X	96
24867 3	7045 Z TR	130
25...		
25097 0	7015 Z	124
25128 4	363TR P7	97
25130 7	363TR P8	97
25164 2	SB 363TR P7	97
25166 7	SB 363TR P8	97
25293 9	351 PG 9X	96
25295 3	SB 351 PG9X	96
25297 7	351 PG9X VH1	97
25477 3	320N ZK6 SO	232
25560 2	7013 Z TR	125
25561 9	7013 Z TR	125
25562 6	7013 Z TR	125
25563 3	7013 Z TR	125
25564 0	7013 Z TR	125
25572 5	7019 ZOT TS	120
25608 1	363TR H9	93
25610 4	351 SZ13	85
25624 1	365 VB	108
25625 8	370 VB	109
25626 5	351 Zoll	85
25673 9	267P	36
25674 6	267P	36
25676 0	278	269
25677 7	278	269
25679 1	SB 7013	169
25681 4	SB 7013	169
25739 2	7047R Z	131
25740 8	7047R Z	131
25741 5	7047R Z	131
25742 2	7047R Z	131
25874 0	387	150
25994 5	7016 Z	124
25996 9	7016 Z	124

Wiha list of order numbers.

Order-No.	Series	Page
25998 3	7016 Z	124
	26...	
26000 2	7046 Z	130
26002 6	7046 Z	130
26045 3	7019 ZOT TS	120
26047 7	2850	47
26048 4	2850	47
26049 1	2850	47
26051 4	2850	47
26052 1	2850	47
26053 8	2850	47
26058 3	2859	48
26059 0	2859	49
26060 6	2859	48
26061 3	2859	48
26062 0	2859	48
26063 7	2859	48
26064 4	2859	49
26065 1	2859	49
26066 8	2859	49
26067 5	2859	49
26068 2	2859	49
26069 9	2859	49
26070 5	2859	49
26071 2	2859	49
26072 9	2859	49
26073 6	2859	49
26077 4	367R	15
26079 8	367R	15
26081 1	367R	15
26083 5	367R	15
26085 9	367R	15
26087 3	367R	15
26091 0	362IP	15
26093 4	362IP	15
26095 8	362IP	15
26097 2	362IP	15
26099 6	362IP	15
26101 6	362IP	15
26103 0	362IP	15
26105 4	362IP	15
26107 8	362IP	15
26109 2	362IP	15
26111 5	362IP	15
26113 9	302 HK6 01	17
26114 6	362 K6 01	19
26121 4	269 T6 01	66
26122 1	269	65, 276
26123 8	269	65, 276
26124 5	269	65, 276
26127 6	2850	47
26128 3	2850	47
26129 0	2850	47
26130 6	2850	47
26131 3	2850	47
26133 7	2850	47
26135 1	334DSR	100
26136 8	334DSR	100
26137 5	334DSR	100
26138 2	334DSR	100
26139 9	334DSR	100
26140 5	334DSR	100
26146 7	311 K 6	17
26148 1	2859	48
26151 1	2859	48

Order-No.	Series	Page
26152 8	2859	49
26154 2	2859	49
26155 9	2859	49
26156 6	2859	49
26157 3	2859	49
26158 0	2859	49
26159 7	2859	49
26164 1	334DS	100
26165 8	334DS	100
26166 5	334DS	100
26167 2	334DS	100
26168 9	334DS	100
26169 6	334DS	100
26170 2	334DS	100
26171 9	334DS	100
26172 6	364DS	101
26173 3	364DS	101
26174 0	364DS	101
26175 7	364DS	101
26176 4	364DS	101
26177 1	364DS	101
26178 8	364DS	101
26179 5	388DS	150
26181 8	365IP	108
26182 5	365IP	108
26183 2	365IP	108
26184 9	365IP	108
26185 6	365IP	108
26186 3	365IP	108
26187 0	365IP	108
26188 7	365IP	108
26190 0	356	15
26191 7	356	15
26192 4	356	15
26193 1	356	15
26194 8	356	15
26195 5	356	15
26196 2	2859	48
26197 9	2859	48
26198 6	2859	48
26199 3	2859	48
26200 6	2859	48
26212 9	344	16
26213 6	344	16
26214 3	344	16
26216 7	344	16
26217 4	344	16
26218 1	344	16
26221 1	2859	48
26222 8	2859	48
26223 5	2859	48
26224 2	2859	48
26225 4	2859	48
26227 3	2859	48
26228 0	2859	48
26229 7	2859	49
26230 3	357	15
26231 0	357	15
26232 7	357	15
26233 4	357	15
26234 1	357	15
26235 8	357	15
26246 4	361IP H9	93
26247 1	334DS K6	101
26248 8	364DS K6	101
26249 5	7019 ZOT TS	120

Order-No.	Series	Page
26250 1	7015 Z	124
26252 5	7979-01	164
26253 3	7979-02	164
26255 6	7180-7	149
26259 4	362	14
26260 0	362	14
26261 7	365IP VB	108
26277 8	2859	48
26278 5	2859	48
26279 2	2859	48
26303 4	367	15
26304 1	367	15
26305 8	367	15
26307 2	367	15
26327 0	2850	47
26328 7	367	15
26329 4	367	15
26330 0	367	15
26331 7	367	15
26332 4	367	15
26333 1	367	15
26346 1	7016 Z IPR	124
26347 8	7016 Z IPR	124
26348 5	7016 Z IPR	124
26349 2	7016 Z IPR	124
26350 8	7016 Z IPR	124
26351 5	7016 Z IPR	124
26352 2	7019 Z XZN	126
26353 9	7019 Z XZN	126
26354 6	7019 Z XZN	126
26355 3	7019 Z XZN	126
26356 0	7019 Z XZN	126
26417 8	830-0	211
26418 5	830-0	211
26419 2	830-0	211
26420 8	830-0	211
26421 5	830-0	211
26422 2	831-3	210
26423 9	831-3	210
26424 6	831-3	210
26425 3	831-3	210
26426 0	831-3	210
26427 7	831-5	210
26428 4	831-5	210
26429 1	831-5	210
26430 7	831-5	210
26431 4	832-33	207
26432 1	832-33	207
26433 8	832-33	207
26434 5	832-35	208
26435 2	832-35	208
26436 9	832-35	208
26437 6	832-35	208
26438 3	833-5	210
26439 0	832-33	207
26451 2	7015	168
26454 3	313	12
26455 0	313	12
26456 7	362TR	14
26457 4	362TR	14
26458 1	362TR	14
26461 1	2852	46
26462 8	2852	46
26463 5	2852	46
26464 2	2852	46
26509 0	832-33	207

Order-No.	Series	Page
26510 6	831-9	210
26511 3	831-9	210
26512 0	831-9	210
26513 7	831-9	210
26514 4	831-9	210
26544 1	2859	48
26582 3	832-39	209
26611 0	832-38	209
26612 7	832-38	209
26613 4	832-38	209
26614 1	832-38	209
26615 8	831-8	210
26616 5	831-8	210
26618 9	831-8	210
26620 2	831-8	210
26625 7	2872	243
26626 4	2872	243
26627 1	2872	243
26629 5	2882	279
26640 0	832-55	207
26641 7	832-55	207
26642 4	832-55	207
26643 1	832-55	207
26644 8	832-99	207
26645 5	832-99	207
26646 2	832-99	207
26647 9	832-99	207
26648 6	832-99	207
26649 3	832-13	208
26650 9	832-13	208
26651 6	832-13	208
26652 3	832-13	208
26653 0	832-15	208
26654 7	832-15	208
26655 4	832-15	208
26656 1	832-15	208
26657 8	832-39	209
26658 5	832-39	209
26659 2	832-39	209
26660 8	832-39	209
26661 5	832-39 080L	209
26662 2	834-15 040	208
26663 9	831-1	210
26664 6	831-1	210
26665 3	831-1	210
26666 0	831-1	210
26667 7	830-0	211
26668 4	829-0	211
26669 1	829-0	211
26670 7	829-0	211
26671 4	829-0	211
26672 1	829-0	211
26673 8	833-1	210
26674 5	832-99 080L	209
26687 5	2879	243
26688 2	2879	243
26689 9	2879	243
26690 5	2879	243
26691 2	2879	243
26692 9	2879	243
26693 6	2879	243
26694 3	2879	243
26695 0	2879	243
26696 7	2879	243
26703 2	Z 01 0 160 01	190
26704 9	Z 01 0 160 05	181

Order-No.	Series	Page
26705 6	Z 01 0 160 06	247
26706 3	Z 01 0 180 01	190
26707 0	Z 01 0 180 05	181
26708 7	Z 01 0 180 06	247
26709 4	Z 01 0 200 01	190
26710 0	Z 01 0 200 05	181
26711 7	Z 01 0 200 06	247
26712 4	Z 02 0 200 01	190
26713 1	Z 02 0 200 05	181
26714 8	Z 02 0 200 06	247
26715 5	Z 02 0 225 01	190
26716 2	Z 02 0 225 05	181
26718 6	Z 05 0 160 01	190
26719 3	Z 05 0 160 05	182
26720 9	Z 05 0 160 06	247
26721 6	Z 05 0 200 01	190
26722 3	Z 05 0 200 05	182
26723 0	Z 05 1 160 01	190
26724 7	Z 05 1 160 05	182
26725 4	Z 05 1 200 01	190
26726 1	Z 05 1 200 05	182
26727 8	Z 05 0 200 06	247
26728 5	Z 05 1 160 06	247
26729 2	Z 05 1 200 06	247
26730 8	Z 07 0 160 01	190
26731 5	Z 07 0 160 05	181
26732 2	Z 07 0 160 06	247
26733 9	Z 09 0 160 01	191
26734 6	Z 09 0 160 05	181
26735 3	Z 09 0 160 06	248
26736 0	Z 12 0 140 05	182
26737 7	Z 12 0 140 06	248
26738 4	Z 12 0 140 01	191
26739 1	Z 12 0 160 01	191
26740 7	Z 12 0 160 05	182
26741 4	Z 12 0 160 06	248
26742 1	Z 12 0 180 01	191
26743 8	Z 12 0 180 05	182
26744 5	Z 12 0 180 06	248
26745 2	Z 14 0 160 06	248
26746 9	Z 16 0 160 01	191
26747 6	Z 16 0 160 05	182
26748 3	Z 16 0 160 06	248
26749 0	Z 16 0 180 01	191
26750 6	Z 16 0 180 05	182
26751 3	Z 16 0 180 06	248
26752 0	Z 16 0 200 01	191
26753 7	Z 16 0 200 05	182
26754 4	Z 16 0 200 06	248
26755 1	Z 99 0 002 06	249
26757 5	Z 17 0 160 01	193
26758 2	Z 17 0 180 01	193
26759 3	Z 17 0 200 01	193
26760 5	Z 21 0 180 01	192
26761 2	Z 21 0 250 01	192
26762 9	Z 21 0 250 05	183
26763 6	Z 21 0 300 01	192
26764 3	Z 22 0 180 01	192
26765 0	Z 22 0 250 01	192
26766 7	Z 22 0 250 05	183
26767 4	Z 22 0 300 01	192
26768 1	Z 23 0 250 01	192
26769 8	Z 23 0 250 05	183
26771 1	Z 30 0 180 01	193
26772 8	Z 30 0 200 01	193
26773 5	Z 31 0 220 00	193

Order-No.	Series	Page
26774 2	Z 31 0 220 01	193
26775 9	Z 31 0 250 00	193
26776 6	Z 31 0 250 01	193
26777 3	Z 31 0 280 00	193
26778 0	Z 31 0 280 01	193
26779 7	Z 31 0 300 00	193
26780 3	Z 31 0 300 01	193
26781 0	Z 33 0 J0 01	194
26782 7	Z 33 0 J1 01	194
26783 4	Z 33 0 J2 01	194
26784 1	Z 33 0 J3 01	194
26785 8	Z 33 1 J01 01	194
26786 5	Z 33 1 J11 01	194
26787 2	Z 33 1 J21 01	194
26788 9	Z 33 1 J31 01	194
26789 6	Z 34 0 A0 01	194
26790 2	Z 34 0 A1 01	194
26791 9	Z 34 0 A2 01	194
26792 6	Z 34 0 A3 01	194
26793 3	Z 99 0 004 01	199
26794 0	Z 34 1 A01 01	194
26795 7	Z 34 1 A11 01	194
26796 4	Z 34 1 A21 01	194
26797 1	Z 34 1 A31 01	194
26799 5	Z 36 0 120 04	285
26801 5	Z 36 0 135 03	203
26802 2	Z 36 1 120 04	285
26804 6	Z 37 0 120 04	285
26806 0	Z 38 0 120 04	285
26808 4	Z 40 1 115 04	283
26812 1	Z 40 0 118 03	202
26813 8	Z 40 1 128 03	202
26814 5	Z 40 4 115 04	283
26815 2	Z 41 3 138 03	201
26816 9	Z 41 1 115 04	283
26818 3	Z 41 1 138 03	201
26821 3	Z 41 3 115 04	283
26822 0	Z 41 4 115 04	283
26825 1	Z 41 6 138 03	201
26826 8	Z 43 1 115 04	284
26830 5	Z 46 0 118 03	202
26831 2	Z 44 1 115 04	284
26832 9	Z 44 3 115 04	284
26833 6	Z 46 0 138 03	202
26835 0	Z 46 1 115 04	284
26838 1	Z 46 4 110 04	284
26839 8	Z 47 1 110 04	284
26840 4	Z 47 2 115 04	285
26845 9	Z 55 0 160 01	190
26846 6	Z 55 0 160 05	181
26847 3	Z 55 0 160 06	247
26850 3	Z 99 0 001 01	198
26852 7	Z 99 0 001 06	249
26853 4	Z 99 0 002 01	198
26854 1	Z 99 0 002 05	184
26855 8	Z 99 0 003 01	198
26856 5	Z 99 0 003 05	184
26864 0	285-900	46, 243
26865 7	2882	279
26866 4	2882	279
26868 8	2889	280
26869 5	2889	280
26870 1	2889	280
26871 8	2889	280
26872 5	2889	280
26873 2	2889	280

Order-No.	Series	Page
26875 6	2889	280
26876 3	2889	280
26877 0	2889	280
26878 7	2889	280
26879 4	2889	280
26880 0	2889	280
26881 7	2889	280
26882 4	2889	280
26883 1	2889	280
26884 8	2889	280
26885 5	2889	280
26888 6	2852	46
26889 3	2859	48
26893 0	2852 S10	46
26919 7	278 K6	270
26920 3	SB 430 4010	31
26928 9	313ESD	265
26929 6	313ESD	265
26931 9	302	11
26953 1	364IP	106
26954 8	364IP	106
26955 5	364IP	106
26956 2	364IP	106
26957 9	364IP	106
26958 6	364IP	106
26959 3	364IP	106
26960 9	364IP	106
26964 7	302	13
26965 4	302	13
26966 1	302	13
26967 8	302	13
26968 5	311	13
26969 2	311	13
26970 8	311	13
26971 5	313	13
26972 2	313	13
26973 9	313	13
26974 6	7944-0DR7	157
26975 3	7944-9DR7	157
26976 0	7944-0D7	157
26977 7	7944-065	157
26978 4	7944-045	158
26979 1	7944-145	157
26980 7	7944-245	157
26982 1	7944-005	159
26983 8	7944-505	159
26984 5	7944-505TR	159
26985 2	7944-904	159
26986 9	7944-905	160
26987 6	7944-906	160
26988 3	7944-0I5	161
	27...	
27000 1	SB 7944-0DR7	157
27001 8	SB 7944-9DR7	157
27002 5	SB 7944-0D7	157
27003 2	SB 7944-065	157
27004 9	SB 7944-045	157
27006 3	SB 7944-245	157
27008 7	SB 7944-005	159
27009 4	SB 7944-505	159
27010 0	SB 7944-505TR	159
27011 7	SB 7944-904	159
27012 4	SB 7944-905	160
27013 1	SB 7944-906	160
27014 8	SB 7944-0I5	161
27026 1	7944	161
27028 5	7019 ZOT TS	120
27030 8	7019 ZOT TS	120
27048 3	7944 VB5	161

Order-No.	Series	Page
27055 1	410 2001 1	217
27057 5	410 2000 2	217
27058 2	410 2000 1	217
27059 9	410 2001 2	217
27060 5	410 2001 3	217
27061 2	410 1000 1	217
27062 9	410 1000 2	217
27063 6	410 1010	217
27064 3	7019 Z SP	126
27065 0	7019 Z SP	126
27066 7	7019 Z SP	126
27067 4	7019 Z SP	126
27079 7	2859	48
27082 7	411 210 2	219
27083 4	411 320 3	219
27084 1	412 2010	222
27085 8	412 2030	222
27086 5	412 2060	222
27087 2	412 2220	222
27088 9	412 2240	222
27089 6	412 2260	222
27090 2	412 2280	222
27091 9	412 2330	222
27092 6	412 2420	222
27093 3	412 2440	222
27094 0	412 2460	222
27095 7	412 2480	222
27096 4	412 2640	222
27097 1	412 2650	222
27098 8	412 2660	222
27099 5	412 2710	222
27100 8	412 2720	222
27101 5	412 2740	222
27102 2	412 2770	222
27103 9	412 2780	222
27104 6	412 2810	222
27105 3	412 2820	222
27106 0	412 2830	222
27107 7	412 2850	222
27108 4	412 2920	222
27109 1	412 2930	222
27110 7	412 4010	223
27111 4	412 4030	223
27112 1	412 4060	223
27113 8	412 4130	223
27114 5	412 4160	223
27115 2	412 4220	223
27116 9	412 4240	223
27117 6	412 4330	223
27118 3	412 4360	223
27119 0	412 4420	223
27120 6	412 4440	223
27121 3	412 4460	223
27122 0	412 4620	223
27123 7	412 4640	223
27124 4	412 4650	223
27125 1	412 4660	223
27126 8	412 4720	223
27127 5	412 4730	223
27128 2	412 4740	223
27129 9	412 4750	223
27130 5	412 4770	223
27131 2	412 4780	223
27132 9	412 4820	223
27133 6	412 4860	223
27134 3	412 4920	223
27135 0	412 4930	223
27144 2	362ESD	266
27145 9	362ESD	266
27146 6	362ESD	266

Order-No.	Series	Page
27147 3	362ESD	266
27148 0	362ESD	266
27149 7	362ESD	266
27150 3	302ESD	265
27151 0	302ESD	265
27157 2	7944-902	160
27252 4	302ESD HK5 01	266
27253 1	362ESD K5	266
27256 2	7019 Z SIT	126
27257 9	7019 Z SIT	126
27258 6	7019 Z SIT	126
27259 3	7019 Z SIT	126
27260 9	7019 Z SIT	126
27279 1	288-900	279
27321 7	7944-995	160
27526 6	2859	49
27554 9	SB 363 H9	92
27555 6	SB 363TR H9	93
27606 5	SB 430 40	31
27614 0	370IP	109
27615 7	370IP	109
27616 4	370IP	109
27617 1	370IP	109
27618 8	370IP	109
27619 5	370IP	109
27620 1	370IP	109
27621 8	370IP	109
27625 6	481M01	57
27627 0	284	58, 273
27628 7	284	58, 273
27629 4	284	58, 273
27630 0	284	58, 273
27631 7	284	58, 273
27632 4	284	58, 273
27633 1	284	58, 273
27634 8	284	58, 273
27635 5	284	59, 274
27636 2	284	59, 274
27637 9	284	59, 274
27638 6	284	59, 274
27639 3	284	59, 274
27641 6	362ESD	266
27687 4	2882 S10	279
27707 9	275	268
27708 6	275	268
27711 6	2889	280
27712 3	U106 T8	62
27713 0	U106 T12	62
27714 7	281 B11 01	61
27715 4	281 T6	60
27717 8	481 T6	60
27729 1	267PR	36
27730 7	267PR	36
27731 4	267PR	36
27732 1	267PR	36
27733 8	267PR	36
27734 5	267PR	36
27736 9	362R	14
27737 6	362R	14
27738 3	362R	14
27739 0	362R	14
27740 6	362R	14
27741 3	362R	14
27742 0	362R	14
27743 7	362R	14
27744 4	362R	14
27745 1	362R	14
27746 8	362R K6 SO	19
27747 5	267PR K6	39
27748 2	278R	269

Order-No.	Series	Page
27749 9	278R	269
27750 5	278R	269
27751 2	278R	269
27752 9	278R	269
27753 6	302	11
27754 3	302	11
27755 0	302	11
27756 7	311	12
27757 4	311	12
27758 1	311	12
27759 8	278R	269
27761 1	278IP	269
27762 8	278IP	269
27763 5	278IP	269
27764 2	278IP	269
27765 9	278IP	269
27766 6	278IP	269
27767 3	278IP	269
27811 3	362R	14
27812 0	2859	49
27813 7	2859	49
27814 4	2859	49
27815 1	2859	49
27816 8	2859	49
27817 5	2859	49
27818 2	2859	49
27820 5	269 SF T11	67
27862 5	255-4L	240
27863 2	255-4	240
27873 1	7804	138
27874 8	SB 430 95	31
27875 5	SB 430 96	31
27876 2	7804	138
27877 9	7804	138
27879 3	7804	138
27880 9	7804	138
27881 6	7804	138
27882 3	7805	138
27883 0	7805	138
27884 7	7805	138
27885 4	7805	138
27886 1	7805	138
27887 8	7805	138
27888 5	7805	138
27889 2	7805	138
27890 8	7805	138
27891 5	7805	138
27892 2	7806	139
27893 9	7806	139
27894 6	7806	139
27895 3	7806	139
27896 0	7806	139
27897 7	7807	139
27898 4	7807	139
27899 1	7807	139
27900 4	7807	139
27901 1	7807	139
27902 8	SB 430 40	31
27905 9	Z 36 0 145 04	285
27907 3	Z 71 1 145 06	250
27910 3	Z 71 4 145 06	250
27928 8	334N	231
27929 5	334N	231
27930 1	334N	231
27931 8	334N	231
27932 5	336N	231
27933 2	336N	231
27934 9	336N	231
27935 6	336N	231
27936 3	SB 351 PM8X	98

Order-No.	Series	Page
27939 4	SB 363 PM8X	98
27956 1	2879	243
27957 8	2879	243
27958 5	2879	243
27959 2	2879	243
27960 8	2879	243
27961 5	2879	243
27963 9	7807	139
27964 6	364R	106
27965 3	364R	106
27966 0	364R	106
27967 7	364R	106
27968 4	364R	106
27969 1	364R	106
27970 7	364R	106
27971 4	364R	106
	28...	
28005 5	362TR	14
28006 2	412 2020	222
28024 6	79184 T19	138
28025 3	79185 T19	138
28026 0	79187 B5	139
28027 7	79186 B5	139
28028 4	7918 TL	138
28050 5	832 B8	211
28051 2	800S-VPA	213
28052 9	800S-VPA	213
28053 6	273	268
28055 0	7805	138
28056 7	7805	138
28057 4	7805	138
28058 1	7806	139
28142 7	9300-001	184
28143 4	9300-002	254
28198 4	278IP	269
28330 8	Z 60 0 145 01	191
28372 8	540DS	100
28373 5	540DS	100
28374 2	540DS	100
28375 9	540DS	100
28376 6	540DS	100
28377 3	540DS	100
28402 2	Z 65 0 05	183
28481 7	7046 Z	130
28691 0	289-900	53
28734 4	2899	53
28735 1	2899	53
28736 8	2899	53
28737 5	2899	53
28738 2	2899	53
28739 9	2899	53
28740 5	2899	53
28741 2	2899	53
28742 9	2899	53
28743 6	2899	53
28744 3	2899	53
28745 0	2899	53
28746 7	2899	53
28747 4	2899	53
28748 1	2899	53
28749 8	2899	53
28756 6	2899	53
28757 3	2899	53
28758 0	2899	53
28760 3	362R IP	15
28761 0	362R IP	15
28762 7	362R IP	15
28763 4	362R IP	15
28764 1	362R IP	15
28765 8	362R IP	15

Order-No.	Series	Page
28766 5	362R IP	15
28767 2	362R IP	15
28768 9	362R IP	15
28769 6	362R IP	15
28770 2	362R IP	15
	29...	
29100 6	267PIP	36
29101 3	267PIP	36
29102 0	267PIP	36
29103 7	267PIP	36
29104 4	267PIP	36
29105 1	267PIP	36
29106 8	267PIP	36
29107 5	267PIP	36
29108 2	267PIP	36
29115 0	5520	21
29116 7	5520	21
29117 4	5520	21
29118 1	5520	21
29119 8	5520	21
29120 4	5520	21
29121 1	5520	21
29122 8	5520	21
29123 5	5520	21
29124 2	5520 HK6	23
29125 9	5520 ZK6	23
29133 4	5533	21
29134 1	5533	21
29135 8	5533	21
29136 5	5533	21
29137 2	5533	21
29138 9	5533 HK5	23
29139 6	5533 ZK5	23
29140 2	5521	21
29141 9	5521	21
29142 6	5521	21
29143 3	5521	21
29144 0	5521	21
29145 7	5521	21
29149 5	5534	21
29150 1	5534	21
29151 8	5534	21
29152 5	5522	22
29153 2	5522	22
29154 9	5522	22
29158 7	5535	22
29159 4	5535	22
29160 0	5535	22
29161 7	5527	22
29162 4	5527	22
29163 1	5527	22
29164 8	5527	22
29165 5	5527	22
29166 2	5527	22
29167 9	5527	22
29168 6	5527	22
29169 3	5527 K6	22
29170 9	5525	22
29171 6	5525	22
29172 3	5525	22
29173 0	5525	22
29174 7	5525	22
29175 4	5528	22
29176 1	5528	22
29177 8	5528	22
29197 6	371RIP	88
29198 3	371RIP	88
29199 0	371RIP	88
29200 3	371RIP	88

Wiha list of order numbers.

Order-No.	Series	Page
29201 0	371RIP	88
29202 7	371RIP	88
29203 4	371RIP	88
29204 1	371RIP	88
29205 8	371RIP	88
29206 5	371RIP	88
29207 2	371RIP	88
29208 9	371RIP HM7	88
29228 7	2891	52
29229 4	2891	52
29230 0	2891	52
29231 7	2891	52
29232 4	2891	52
29233 1	2893	52
29234 8	2893 S01	52
29236 2	2891	52
29412 0	7944-055	158
29415 1	7948-047	155
29416 8	7948-927	155
29417 5	7948-005	155
29418 2	7948-255	155
29420 5	Z 71 5 145 06	250
29422 9	411 170 1	219
29425 0	Z 33 0 J4 01	194
29427 4	Z 33 1 J41 01	194
29428 1	Z 34 0 A4 01	194
29429 8	Z 34 1 A41 01	194
29435 9	Z 26 0 320 00	196
29436 6	Z 26 0 416 00	196
29437 3	Z 26 0 535 00	196
29438 0	Z 26 1 314 00	196
29439 7	Z 26 1 426 00	196
29440 3	Z 26 1 570 00	196
29441 0	Z 26 2 310 00	196
29442 7	Z 26 2 420 00	196
29443 4	Z 26 2 560 00	196
29446 5	412 2760	222
29447 2	412 4760	223
29463 2	281 01	150
29465 6	325N K6 01	233
29466 3	322 K5	233
29467 0	2859	49
29471 7	369R Zoll	76
29472 4	369R Zoll	76
29473 1	369R Zoll	76
29474 8	369R Zoll	76
29475 5	369R Zoll	76
29485 4	Z 66 0 180 00	197
29486 1	Z 66 0 250 00	197
29487 8	Z 66 0 300 00	197
29488 5	Z 67 0 280 00	197
29489 2	Z 67 1 280 00	197
29490 8	Z 67 2 280 00	197
29541 7	7948 VB1	161
29544 8	7929 Z	165
29550 9	Z 65 2 05	183
29553 0	2859	49
29554 7	2859	49
29555 4	2859	49
29556 1	2859	49
29557 8	2859	49
29558 5	2859	49
29559 2	2859	49
29560 8	2859	49
29875 3	7929 ZOT	165
29876 0	7929 ZOT	165

Order-No.	Series	Page
29877 7	7929 ZOT	165
29878 4	7929 ZOT	165
29879 1	7929 ZOT	165
29880 7	7929 ZOT	165
30...		
30066 1	Z 60 0 180 01	191
30342 6	291	47
30343 3	291	47
30344 0	291	47
30345 7	291	47
30346 4	291	47
30347 1	291	47
30348 8	291	47
30349 5	291	47
30350 1	291	47
30351 8	291	47
30361 7	323N	230
30362 4	323N	230
30363 1	323N	230
30364 8	323N	230
30365 5	323N	230
30366 2	323N	230
30372 3	284	57
30373 0	2691	64, 135
30404 1	SB 284	57
30495 9	2882	279
30518 5	412 2000	222
30519 2	412 4000	223
30658 8	Z 01 9 180 16	245
30661 8	Z 06 9 160 16	245
30666 3	Z 12 9 160 16	245
30700 4	328	237
30701 1	328	237
30715 8	327	237
30716 5	327	237
30824 7	Z 99 0 006 02	188
30826 1	Z 01 0 02	186
30827 8	Z12 0 02	187
30852 0	2859	49
30975 6	Z 12 0 02	187
30976 3	Z 12 0 02	187
30978 7	Z 01 0 02	186
30979 4	Z 01 0 02	186
31...		
31233 6	366R	87
31234 3	366R	87
31235 0	366R	87
31236 7	366R	87
31237 4	366R	87
31238 1	366R	87
31239 8	366R	87
31240 4	366R	87
31241 1	366R	87
31242 8	366R	87
31243 5	366R	87
31244 2	366R	87
31432 3	362ESD	266
31439 2	411 210 8	219, 290
31492 7	366R SZ13	87
31496 5	384ESD	57, 273
31497 2	384ESD T6 01	274
31498 9	2691ESD	64, 276
31499 6	2691 T11 ESD	277
31771 3	SB 255-7	240
31815 4	7015 HOT	118

Order-No.	Series	Page
31816 1	7015 HOT	118
31817 8	7015 HOT	118
31818 5	7015 HOT	118
31819 2	7015 HOT	118
31820 8	7015 HOT	118
31863 5	320N	229
31901 4	362ESD	266
31913 7	7015	168
31923 6	SB 366R SZ13	87
31957 1	7042 Z	128
31958 8	7042 Z	128
31959 5	7042 Z	128
31960 1	7041 Z	128
31961 8	7041 Z	128
31962 5	7041 Z	128
31990 8	7929 Inkra	165
31991 5	7929 Inkra	165
31992 2	7929 Inkra	165
31993 9	7929 Inkra	165
31994 6	7929 Inkra	165
31995 3	7929 Inkra	165
32...		
32105 5	7041 Z	128
32151 2	302ESD	255
32152 9	302ESD	255
32153 6	302ESD	255
32154 3	311ESD	255
32155 0	311ESD	255
32156 7	313ESD	255
32157 4	313ESD	255
32160 4	281-02	139, 150
32161 1	387ESD	266, 281
32179 6	300-11	33
32180 2	301-11	33
32200 7	SB 255-1	239
32201 4	SB 255-3	240
32202 1	SB 255-8	240
32249 6	362BE K6	19
32250 2	362BE	14
32251 9	362BE	14
32252 6	362BE	14
32253 3	362BE	14
32254 0	362BE	14
32255 7	362BE	14
32256 4	362BE	14
32264 9	356	15
32265 6	356	15
32278 6	275 K6	270
32279 3	277 K6	270
32281 6	SB327 S2	237
32282 3	SB328 S2	237
32292 2	7848	139
32293 9	7848	139
32294 6	7848	139
32295 3	7848	139
32296 0	7848	139
32297 7	7848	139
32298 4	281 T6 01	60
32299 1	7045 Z	129
32302 8	7045 Z	129
32303 5	7045 Z	129
32304 2	7045 Z	129
32305 9	7045 Z	129
32306 6	7045 Z	129
32307 3	7045 Z	129

Order-No.	Series	Page
32308 0	7045 Z	129
32309 7	7045 Z	129
32310 3	SB24628	149
32311 0	SB24629	149
32312 7	277	268
32313 4	277	268
32314 1	277	268
32315 8	275	268
32316 5	269 EB95	67
32317 2	269 EB53	67
32318 9	ZP 01 0 14	287
32319 6	ZP 02 0 02	186
32320 2	ZP 02 0 02	186
32322 6	ZP 05 0 02	187
32323 3	ZP 05 0 02	187
32324 0	ZP 05 1 02	187
32325 7	ZP 07 1 14	287
32326 4	ZP 09 0 14	287
32327 1	ZP 11 0 14	288
32328 8	ZP 05 1 02	187
32329 5	ZP 15 0 14	288
32330 1	ZP 07 0 02	186
32332 5	ZP 09 0 02	186
32333 2	ZP 16 0 02	187
32334 9	ZP 18 0 14	288
32335 6	ZP 20 1 14	288
32336 3	ZP 20 2 14	288
32337 0	ZP 25 3 14	289
32338 7	ZP 24 0 14	289
32339 4	ZP 16 0 02	187
32340 0	ZP 25 2 14	289
32341 7	ZP 16 0 02	187
32342 4	ZP 21 0 02	188
32343 1	ZP 46 0 14	187
32344 8	ZP 50 0 14	289
32345 5	ZP 55 0 02	188
32346 2	ZP 16 0 14	288
32347 9	ZP 06 0 14	287
32349 3	ZP 99 0 140 02	289
32352 3	Z 22 0 02	188
32354 7	305	17
32355 4	305	17
32356 1	305	17
32357 8	305	17
32358 5	305	17
32359 2	305	17
32360 8	305	17
32361 5	305	17
32362 2	305	17
32363 9	305	17
32364 6	305	17
32383 7	302	11
32384 4	302	11
32385 1	255-3 VB	240
32386 8	366BE	90
32387 5	366BE	90
32388 2	366BE	90
32389 9	366BE	90
32390 5	366BE	90
32391 2	366BE	90
32392 9	366BE	90
32393 6	366BE	90
32394 3	366BE H8	90
32395 0	SB 366BE H8	90
32396 7	358N	230
32397 4	358N	230

Order-No.	Series	Page
32399 8	302	11
32400 1	302	11
32404 9	397	12
32405 6	397	12
32406 3	397	12
32409 4	7045BE	129
32410 0	7045BE	129
32411 7	7045BE	129
32412 4	7045BE	129
32413 1	7045BE	129
32414 8	7045BE	129
32415 5	7045BE	129
32416 2	7045BE	129
32417 9	7045BE	129
32418 6	7045BE	129
32419 3	7045BE	129
32420 9	7045BE	129
32421 6	7045BE	129
32422 3	7045BE	129
32423 0	7045BE	129
32424 7	7045BE	129
32477 3	7148C	137, 148
32484 1	281-01ESD	281
32490 2	7049XH	127
32491 9	7049XH	127
32492 6	7049XH	127
32493 3	7049XH	127
32494 0	7049XZ	127
32495 7	7049XZ	127
32496 4	7049XZ	127
32497 1	7049XZ	127
32498 8	7041 Inkra	121
32500 8	7041 Inkra	121
32501 5	7041 Inkra	121
32502 2	7042 Inkra	121
32503 9	7042 Inkra	121
32504 6	7042 Inkra	121
32505 3	7110M	134, 148
32508 4	7241Z	142
32509 1	7241Z	142
32510 7	7241Z	142
32511 4	7241Z	142
32512 1	7241Z	142
32513 8	7244	141
32514 5	7244	141
32515 2	7244	141
32516 9	7244	141
32517 6	7244	141
32518 3	7244	141
32519 0	7244	141
32520 6	7244M	141
32521 3	7244M	141
32522 0	7244M	141
32523 7	7244M	141
32524 4	7244M	141
32525 1	7244M	141
32526 8	7244M	141
32527 5	7244M	141
32528 2	7244M	141
32529 9	7244M	141
32530 5	7244M	141
32531 2	7204	141
32532 9	7204	141
32533 6	7204	141
32534 3	7204	141
32535 0	7204	141

Order-No.	Series	Page
32536 7	7204	141
32537 4	7204	141
32538 1	7204	141
32539 8	7204	141
32540 4	7204	141
32541 1	7204M	141
32542 8	7204M	141
32543 5	7204M	141
32544 2	7204M	141
32545 9	7204M	141
32546 6	7204Z	142
32547 3	7204Z	145
32548 0	7204Z	142
32549 7	7204Z	142
32550 3	7205	141
32551 0	7205	141
32552 7	7205	141
32553 4	24633	142
32554 1	24634	142
32555 8	24635	143
32556 5	24636	145
32557 2	24632	143
32558 9	7051	145
32559 6	7051	145
32560 2	7051	145
32561 9	7050	145
32562 6	7050	145
32563 3	7050	145
32564 0	7055	145
32565 7	7055	145
32566 4	7055	145
32567 1	7055	145
32573 2	24636 B5	145
32606 7	308ST	296
32607 4	308ST	296
32608 1	308ST	296
32609 8	308ST	296
32610 4	312ST	296
32611 1	312ST	296
32612 8	312ST	296
32613 5	314ST	296
32614 2	314ST	296
32615 9	314ST	296
32616 9	367ST	296
32617 3	367ST	296
32618 0	367ST	296
32619 7	367ST	296
32620 3	367ST	296
32621 0	367ST	296
32622 7	367ST	296
32623 4	367ST	296
32624 1	367ST	296
32625 8	308ST HK6	297
32626 5	308ST ZK6	297
32628 9	367ST K6 SO	297
32629 6	24630	143
32630 2	24631	143
32632 6	369ST S9	300
32633 3	SB 369ST S9	300
32635 7	369ST	300
32636 4	369ST	300
32637 1	369ST	300
32638 8	369ST	300
32639 5	369ST	300
32640 1	369ST	300
32641 8	369ST	300

Order-No.	Series	Page
32642 5	369ST	300
32643 2	369ST	300
32645 6	7010ST	298
32646 3	7010ST	298
32647 0	7010ST	298
32648 7	7010ST	298
32649 4	7011ST	298
32650 0	7011ST	298
32651 7	7011ST	298
32652 4	7012ST	298
32653 1	7012ST	298
32654 8	7012ST	298
32655 5	7015ST	298
32656 2	7015ST	298
32657 9	7015ST	298
32658 6	7015ST	298
32659 3	7015ST	298
32660 9	7015ST	298
32661 6	7015ST	298
32662 3	7041ST	298
32663 0	7041ST	298
32664 7	7041ST	298
32665 4	7042ST	298
32666 1	7042ST	298
32667 8	7042ST	298
32668 5	7045ST	298
32669 2	7045ST	298
32670 8	7045ST	298
32671 5	7045ST	298
32672 2	7045ST	298
32686 9	7049XH	127
32687 6	7049XH	127
32688 3	7049XZ	127
32689 0	7049XZ	127
32690 6	7015ST	298
32802 3	7948-0501	156
32803 0	7948-0502	156
32804 7	7045BE 9570	129
32805 4	7045BE	170
32806 1	7045BE	170
32807 8	7045BE	170
32808 5	7045BE	170
32809 2	7045BE	170
32810 8	7045BE	170
32811 5	7045BE	170
32818 4	7204K39	142
32867 2	398	11
32868 9	398	11
32869 6	398	11
32870 2	398	11
32871 9	398	11
32901 3	38090101	152
32902 0	38090102	152
32903 7	38090103	152
32904 4	38090104	152
32908 2	7944-9ST4	299
32910 5	7944-0ST5	299
32911 2	7944-5ST5	299
33...		
33005 7	38090201	241
33006 4	SB 38090201	241
33007 1	SB 38090101	152
33008 8	SB 38090102	152
33009 5	SB 38090103	152
33010 1	SB 38090104	152
33142 9	79187 T01	256
33143 6	79187 T02	256
33144 3	79187 T03	256
33148 1	9300-007	253
33149 8	9300-008	253

Order-No.	Series	Page
33150 4	9300-009	254
33151 1	9300-010	255
33152 8	9300-011	255
33153 5	9300-012	256
33154 2	9300-013	256
33155 9	9300-014	256
33179 5	5590N T15	257
33180 1	5590N T8	257
33181 8	5589N K7	257
33182 5	352N S7	257
33183 2	7207N K1001	258
33184 9	7208N K1001	258
33230 3	24637	143
33232 7	410 2007	217
33244 0	38090101 VH	152
33245 7	38090101 VH	152
33246 4	38090101 VH	152
33247 1	38090101 VH	152
33248 8	38090201 VH	241
33252 5	7045BE	170
33254 9	Z 12 0 15	179
33256 3	Z 05 0 15	179
33260 0	Z 01 0 15	179
33471 0	Z 49 2 03	203
33472 7	Z 49 7 03	203
33503 8	7000 EB16 ESD	135
33504 5	9300-015	291
33505 2	9300-016	291
33506 9	9300-017	291
33507 6	Z 99 0 001 04	285
33521 2	Z 40 3 04	283
33571 7	2879	243
33572 4	2879	243
33585 4	2879	243
33586 1	2879	243
33633 2	291	47
33634 9	291	47
33635 6	291	47
33636 3	291	47
33637 0	291	47
33638 7	291	47
33639 4	291	47
33640 0	291	47
33641 7	291	47
33642 4	291	47
33643 1	291	47
33644 8	291	47
33645 5	291	47
33646 2	291	47
33647 8	291	47
33660 8	410 2007 2VH	217
33663 9	7948-928	156
33664 6	7948-92801	156
33666 0	7045 HOT	118
33667 7	7045 HOT	118
33668 4	7045 HOT	118
33669 1	7045 HOT	118
33670 7	7045 HOT	118
33671 4	7045 HOT	118
33672 1	7929 TiN	164
33673 8	7929 TiN	164
33674 5	7929 TiN	164
33675 2	7929 TiN	164
33676 3	7929 TiN	164
33677 6	7929 HOT	165
33678 3	7929 HOT	165
33679 0	7929 HOT	165
33695 0	7049 ZOT TW	120
33696 7	7049 ZOT TW	120
33697 4	7049 ZOT TW	120

Order-No.	Series	Page
33698 1	7049 ZOT TW	120
33699 8	7049 ZOT TS	120
33700 1	7049 ZOT TS	120
33701 8	7049 ZOT TS	120
33702 5	7049 ZOT TS	120
33703 2	7041 Z	128
33704 9	7041 Z	128
33705 6	7041 Z	128
33706 3	7042 Z	128
33707 0	7042 Z	128
33708 7	7042 Z	128
33709 4	7045 Z	129
33710 0	7045 Z	129
33711 7	7045 Z	129
33712 4	7045 Z	129
33713 1	7045 Z	129
33714 8	7045 Z	129
33715 5	7045 Z	129
33716 2	7045 Z	129
33717 9	7045 Z	129
33718 6	7045 Z	129
33719 3	7045 Z	129
33720 9	7045 Z	129
33721 6	7045 Z	129
33722 3	7045 Z	129
33723 0	7045 Z	129
33724 7	7045 Z	129
33725 4	7045 Z	129
33726 1	7045 Z	129
33727 8	7045 Z	129
33728 5	7045 Z	129
33729 2	7045 Z	129
33730 8	7045 Z	129
33731 5	7045 Z	129
33732 2	7045 Z	129
33736 0	380101	153
33738 4	SB 380101	153
33739 1	380101 VH	153
33740 7	380102	153
33741 4	SB 380102	153
33742 1	380101 VH	153
33743 8	380103	153
33744 5	SB 380103	153
33745 2	380101 VH	153
33746 9	SB 380104	153
33747 6	380101 VH	153
33749 0	366BE	90
33750 6	366BE	90
33751 3	366BE SZ13	90
33752 0	SB 366BE SZ13	90
33753 7	366R HM7	87
33754 4	SB 366R HM7	87
33764 3	380104	153
33765 0	7148STC	199
33783 4	9300-701	301
33784 1	369ST SVH1	300
33785 8	SB 7944-0ST5	299
33786 5	SB 7944-5ST5	299
33787 2	SB 7944-9ST4	299
33841 1	Z 62 0 002 06	251
33842 8	Z 62 0 003 06	251
33843 5	Z 62 0 004 06	252
33844 2	Z 62 0 001 06	251
33845 9	Z 62 0 000 06	251
33846 6	24673SB	252
33847 3	24672SB	252
33848 0	7000 EB26 ESD	135
33855 8	7011 SB	167
33856 5	7011 SB	167
33857 2	7012 SB	168

Order-No.	Series	Page
33858 9	7012 SB	168
33859 6	7015 SB	168
33860 2	7015 SB	168
33861 9	7015 SB	168
33862 6	7015 SB	168
33863 3	7015 SB	168
33864 0	7015 SB	168
33910 4	Z 71 6 06	250
33920 3	7045 Z	129
33921 0	7045 Z	129
33922 7	7045 Z	129
33923 4	7045 Z	129
33924 1	7045 Z	129
33925 8	7045 Z	129
33926 5	7045 Z	129
33927 2	7045 Z	129
33928 9	7045 Z	129
33929 6	7045 Z	129
33930 2	7045 Z	129
33931 9	7045 Z	129
33932 6	7045 Z	129
33945 6	410 2001 1VH	217
33946 3	410 1000 2VH	217
33961 6	7040 Z	128
33962 3	7040 Z	128
33963 0	7040 Z	128
33964 7	7040 Z	128
33965 4	7040 Z	128
33966 1	7040 Z	128
34...		
34005 6	7013ST	298
34006 3	7013ST	298
34007 0	7013ST	298
34008 7	7013ST	298
34009 4	7013ST	298
34010 0	7013ST	298
34011 7	7013ST	298
34268 5	369 H9F	85
34269 2	369F	85
34270 8	369F	85
34271 5	369F	85
34272 2	369F	85
34273 9	369F	85
34274 6	369F	85
34275 3	369F	85
34276 0	369F	85
34277 7	369F	85
34452 8	7045R	128
34453 5	7045R	128
34454 2	7045R	128
34455 9	7045R	128
34456 6	7045R	128
34457 3	7045R	128
34483 2	7011ST	167
34484 9	7011ST	167
34485 6	7011ST	167
34486 3	7012ST	168
34487 0	7012ST	168
34488 7	7012ST	168
34489 4	7015ST	168
34490 0	7015ST	168
34491 7	7015ST	168
34492 4	7015ST	168
34493 1	7015ST	168
34494 8	7015ST	168
34495 5	410 2000 2VH	217
34533 4	2850	47
34554 9	7043 Z	131
34555 6	7043 Z	131

Order-No.	Series	Page
34556 3	7043 Z	131
34557 0	7043 Z	131
34558 7	7043 Z	131
34559 4	7043 Z	131
34560 0	7043 Z	131
34577 8	2831-00	235
34578 5	2831-10	235
34579 2	2831-10	235
34580 8	2831-10	235
34581 5	2831-10	235
34582 2	2831-10	235
34583 9	2831-11	235
34584 6	2831-11	235
34589 1	2831-14	235
34590 7	2831-14	235
34614 0	2852 S10-01	46
34664 5	334D	100
34665 2	334D	100
34666 9	334D	100
34667 6	334D	100
34668 3	334D	100
34669 0	334D	100
34670 6	334D	100
34671 3	334D	100
34672 0	334D	100
34673 7	334D	100
34674 4	334D	100
34675 1	334D	100
34676 8	334D	100
34677 5	334D	100
34678 2	334D	100
34679 9	364D	101
34680 5	364D	101
34681 2	364D	101
34682 9	364D	101
34683 6	364D	101
34684 3	364D	101
34685 0	364D	101
34686 7	7928-913	163
34688 1	Z 33 4 01	195
34689 8	Z 33 4 01	195
34690 4	Z 33 4 01	195
34691 1	Z 33 4 01	195
34692 8	Z 33 4 01	195
34693 5	Z 33 5 01	195
34694 2	Z 33 5 01	195
34695 9	Z 33 5 01	195
34696 6	Z 33 5 01	195
34697 3	Z 33 5 01	195
34698 0	Z 34 4 01	195
34699 7	Z 34 4 01	195
34700 0	Z 34 4 01	195
34701 7	Z 34 4 01	195
34702 4	Z 34 4 01	195
34703 1	Z 34 5 01	195
34704 8	Z 34 5 01	195
34705 5	Z 34 5 01	195
34706 2	Z 34 5 01	195
34707 9	Z 34 5 01	195
34708 6	Z 99 0 007 01	199
34729 1	Z 50 1 01	191
34730 7	Z 50 1 01	191
34733 8	2831 T701	235
34734 5	2831 T702	235
34735 2	2831 T703	235
34736 9	366 H8	91
34737 6	SB 366 H8	91
34738 3	366 H7	91
34739 0	SB 366 H7	91
34740 6	366R H8	87

Order-No.	Series	Page
34741 3	SB 366R H8	87
34742 0	371RIP H8	88
34743 7	Z 50 1 06	248
34744 4	Z 50 1 06	248
34745 1	255-11	239
34746 8	7015	168
34747 5	7015	168
34748 2	7015	168
34749 9	7015	168
34750 5	7015	168
34751 2	7015	168
34752 9	7015	168
34753 6	369 H9S	71
34754 3	SB 369 H9S	71
34755 0	369S	71
34756 7	369S	71
34757 4	369S	71
34758 1	369S	71
34759 8	369S	71
34760 4	369S	71
34761 1	369S	71
34762 8	369S	71
34763 5	369S	71
34764 2	369 HVH1S	71
35...		
35386 5	7148CM	148, 170
35389 6	3201 K6	232
35390 2	3201	229
35391 9	3201	229
35392 6	3201	229
35393 3	3211	229
35394 0	3211	229
35395 7	3241	229
35396 4	3241	229
35397 1	3021	13
35398 8	3111	13
35399 5	3131	13
35400 8	7325 Z	132
35401 5	7325 Z	132
35402 2	7325 Z	132
35403 9	7325 Z	132
35414 5	255-11	239
35446 6	3201	229
35456 5	7041 Z	128
35457 2	7041 Z	128

Wiha article series.

Series	Page
1	
129	33
148	25
148 HK + ZK	26
153	25
161	109
162	33
162 HK + ZK	33
186	25
198-1	28
2	
207	109
221	33
222	25
224	109
SB 246 01	146
SB 246 02	146
SB24628	149
SB24629	149
24630	143
24631	143
24632	143
24633	142
24634	142
24635	143
24636	145
24636 B5	145
24637	143
24672SB	252
24673SB	252
255- ...	239/240
258-4	240
260P	35
260P K6 + K7	38
261P	35
262P	35
263P	37
263P Zoll	37
264P	37
264P K6	39
264P Zoll	37
265P	37
265P K6	39
265P Zoll	37
267P	36
267P K6	38
267P K6M	38
267PIP	36
267PR	36
267PR K6	39
26810P	37
269	64/65, 276/277
269 EB...	67
269 T...	66
269 T11 01	67
2691	64, 135
2691ESD	64, 276
2691 T11 ESD	277
270	271
270 HK3	271
271	271
272	268
272 K6	270

Series	Page
273	268
274	268
275	268
275 K6	270
276	268
277	268
277 K6	270
278	269
278IP	269
278 K6	270
278R	269
279-10	269
281 01	150
281-01ESD	281
281-02	139, 150
281 B11...	61
281 T6	60
281 T6 01	60
281 T11	62
282	57
282 B11-1	61
SB 282 122	61
2831-00	235
2831-10	235
2831-11	235
2831-14	235
2831 T701	235
2831 T702	235
2831 T703	235
284 + SB	57 – 59
284ESD	57, 273
284ESD T6 01	276
285-900	46, 243
2850	47
2852	46
2852 S10	46
2852 S10-01	46
2859	48/49
2872	243
2879	243
2882	279
2882 S10	279
288-900	279
2889	280
2891	52
2893	52
2893 S01	52
289-900	53
2899	53
291	47
3	
300-11	33
300-2	27
301-11	33
301-2	27
302	11, 13
3021	13
302ESD	265
302ESD HK5 01	266
302 HK6 SO	17
302 HK6 01	17
302 ZK6 SO	17
305	17

Series	Page
308	11
308 HK+ZK	18
308ST	296
308ST HK6	297
308ST ZK6	297
311	12, 13
3111	13
311ESD	265
311 K6	17
312	12
312ST	296
313	12/13
3131	13
313ESD	265
314	12
314ST	296
320	238
3201	229
3201 K6	232
320 K6	238
320N	229
320N K6	232
320N K7	233
320N ZK6 SO	232
320 P7 SO	238
321	238
3211	229
321N	229
322	231
322 K5	233
323N	230
324	229
3241	229
325	230
325N K6 01	233
327	237
SB327 S2	237
328	237
SB328 S2	237
331	108
334	104
334D	100
334DS	100
334DS K6	101
334DSR	100
334N	231
334R	103
334R VB	103
334 VB	104
334 Zoll	105
336	104
336N	231
336 Zoll	105
338	105
341	16
341 K5	18
342	26
343	16
344	16
347	16
347 Zoll	16
350	83
350 H7	83
350 H9	83

Series	Page
351	82
351 B8	82
351 H7	82
351 H9 + SB	82
351 HZ8	85
351 PG7 + SB	95
351 PG7 VH1	97
351 PG9X + SB	96
351 PG9X VH1	97
351 PK6X + SB	96
351 PK7 + SB	95
SB 351 PM8X	98
351 R8	82
351 SZ13	85
351 VB	83
351 Zoll	85
352	80
352B	81
352 B8	80
352 H7+H9	80
352 H7B	81
352 H9B	81
352 HM5B	81
352N S7	257
352 S9+SB	80
353	26
355	93
356	15
357	15
358N	230
359	83
360	25
361IP	93
361IP H9	93
362	14
362BE	14
362BE K6	19
362ESD	266
362ESD K5	266
362IP	15
362 K6 01	19
362 K6 SO	19
362 K7	19
362R	14
362RIP	15
362R K6 SO	19
362TR	14
362TR K6	19
363	92
363 H6	92
363 H9 + SB	92
363 HM7	92
363 P7+SB	96
363 P8+SB	96
363 P8 VH1	97
SB 363 PM8X	98
363TR	93
363TR H9+SB	93
363TR P7+SB	97
363TR P8+SB	97
363 VB	92
364	106
364D	101
364DS	101

Series	Page
364DS K6	101
364IP	106
364R	106
364 VB	106
365	108
365IP	108
365IP VB	108
365 VB	108
366	91
366BE	90
366BE H8+SB	90
366BE SZ13+SB	90
366 H7 + SB	91
366 H8 + SB	91
366R	87
366R H8 + SB	87
366R HM7+SB	87
366R SZ13+SB	87
366 SZ13+SB	91
367	15
367R	15
369	77
SB 369	77
369B	78
369 B8	78
369F	85
369 H7 + SB	78
369 H7B + SB	79
369 H9 + SB	78
369 H9B + SB	79
369 H9F	85
369 H9S + SB	71
369 HVH1S	71
369 HZ8 + SB	84
369R	75
369R P7 + SB	95
369R S9 + SB	75
369R SVH1	75
369R SZ13 + SB	76
369R Zoll	76
369S	71
369 S9 + SB	77
369 S9B + SB	79
369ST	300
369ST S9 + SB	300
369ST SVH1	300
369 SVH1	77
369 SVH1B	79
369 SZ13B + SB	84
369 Zoll	84
370	109
370IP	109
370 VB	109
371RIP	88
371RIP H8	88
371RIP HM7	88
372	16
376ST	296
376ST K6 SO	297
380 101 + SB	153
380 ... VH	153
380 102 + SB	153
380 103 + SB	153
380 104 + SB	153

Series	Page
380 90 101 + SB	152
380 90 ... VH	152
380 90 102 + SB	152
380 90 103 + SB	152
380 90 104 + SB	152
380 90 201 + SB	241
380 90 201 VH	241
384	150
386	150
387	150
387ESD	266, 281
388	150
388DS	150
397	12
398	11
4	
400 10 + SB	29
400 12	29
405 11	28
410 1000	217
410 1010	217
410 2000	217
410 2001	217
410 2007	217
410 ... VH	217
411 170 1	219
411 210 2	219
411 210 8	219, 290
411 320 3	219
412 2...	222
412 4...	223
K 430 10	27
K 430 20	27
430 40	31
SB 430 40	31
SB 430 4010	31
SB 430 95	31
SB 430 96	31
481 M01	57
481 T6	60
5	
500	28
509	28
530	11
530 HK+ZK	18
531	12
532	12
540	103
540 DS	100
5520	21
5520 HK+ZK	23
5521	21
5522	22
5525	22
5527	22
5527 K6	22
5528	22
5533	21
5533 HK+ZK	23
5534	21
5535	22

Series	Page
5589N K7	257
5590N T8	257
5590N T15	257
7	
7000 EB16 ESD	277
7000 EB26 ESD	277
7000 Z	134
7001 Z	134
7003 Z	134
7005 Z	134
7010 D	115
7010 DR	113
7010 HOT	118
7010 SB	167
7010ST	298
7010 TiN	117
7010 Z	123
7010 Z L	123
7010 ZOT	119
7011 ACR	119
7011 D	115
7011 DR	113
7011 HOT	118
7011 Inkra	121
7011 SB	167
7011ST	298
7011 TiN	117
7011 Z	123
7011 ZOT	119
7011 ZOT L	119
7012 ACR	119
7012 D	115
7012 DR	113
7012 HOT	118
7012 Inkra	121
7012 SB	168
7012ST	298
7012 TiN	117
7012 Z	123
7012 ZOT	119
7012 ZOT L	119
7013R Z	125
7013 SB	169
7013ST	298
7013 Z TR	125
7013 Z	125
7015 D	115
7015 DR	113
7015 HOT	118
7015K Z	124
7015 SB	168
7015ST	298
7015 TiN	117
7015 Z	124
7015 ZOT	119
7015 Z TR	124
7016 Z	124
7016 Z IPR	124
7017R Z	125
7017 SB	169
7017 Z	125
7018 Z	126

Series	Page
7019 ZOT TS	120
7019 ZOT TW	120
7019 Z SIT	126
7019 Z SP	126
7019 Z XZN	126
7020 Z	136
7021 Z	136
7022 Z	136
7023 Z	136
7025 Z	136
7040 SB	169
7040 Z	128
7041 D	115
7041 DR	113
7041 HOT	118
7041 Inkra	121
7041 SB	169
7041ST	298
7041 TiN	117
7041 Z	128
7041 ZOT	120
7042 D	115
7042 DR	113
7042 HOT	118
7042 Inkra	121
7042 SB	169
7042ST	298
7042 TiN	117
7042 Z	128
7042 ZOT	120
7043R Z	131
7043 Z	131
7044	143
7044 M	143
7045BE	129
7045BE 9570	129
7045BE SB	170
7045 HOT	118
7045R	128
7045ST	298
7045 Z	129
7045 Z SB	170
7045 Z TR	130
7046 Z	130
7047R Z	131
7048 Z	131
7049XH	127
7049XZ	127
7049 ZOT TS	120
7049 ZOT TW	120
7050	145
7051	145
7055	145
7081 ZOT	136
7082 ZOT	136
7110M	134, 148
7113	149
7113 S	149
7113 SB	171
7140	148
7142	148
7143	148
7148C	137, 148

Series	Page
7148CM	148
7148CM SB	170
7148ST	299
7149 SB	170
7149	148
7180-7	149
7183	136, 149
7201	144
7204	141
7204K39	142
7204M	141
7204Z	142, 145
7205	141
7207N K1001	258
7208N K1001	258
7210	144
7230	144
7240	144
7240 SB	171
7241Z	142
7244	141
7244M	141
7280	144
7311 Z	132
7312 Z	132
7321 Z	132
7322 Z	132
7325 Z	132
7331 Z	132
7332 Z	132
7341 Z	132
7342 Z	132
7802	59, 274
7803	59, 274
7804	138
7805	138
7806	139
7807	139
7848	139
7918 TL	138
79184 T19	138
79185 T19	138
79186 B5	139
79187 B5	139
79187 T01	256
79187 T02	256
79187 T03	256
7928-913	163
7928-923	163
7928-928	163
7929 HOT	165
7929 Inkra	165
7929 TiN	164
7929 Z	165
7929 ZOT	165
7944	161
7944-005 + SB	159
7944-045 + SB	158
7944-055	158
7944-065	157
7944-0D7 + SB	157
7944-0DR7+SB	157
7944-0I5 + SB	161
7944-0ST5 + SB	299

Series	Page
7944-145	158
7944-245 + SB	158
7944-505 + SB	159
7944-505TR+SB	159
7944-5ST5 + SB	299
7944-902	160
7944-904 + SB	159
7944-905 + SB	160
7944-906 + SB	160
7944-995	160
7944-9DR7+SB	157
7944-9ST4 + SB	299
7944 VB5	161
7948-005	155
7948-047	155
7948-0501	156
7948-0502	156
7948-255	155
7948-927	155
7948-928	156
7948-92801	156
7948 VB1	161
7979-01	164
7979-02	164
8	
800	213
800K	213
800S	213
802	213
829-0	211
830-0	211
831-1	210
831-3	210
831-5	210
831-8	210
831-9	210
832-13	208
832-15	208
832-33	207
832-35	208
832-38	209
832-39	209
832-55	207
832-99	207, 209
832 B8	211
833-1	210
833-5	210
834-15	208

Series	Page
9	
9246 01	146
9300-001	184
9300-002	254
9300-007	253
9300-008	253
9300-009	254
9300-010	255
9300-011	255
9300-012	256
9300-013	256
9300-014	256
9300-015	291
9300-016	291
9300-017	291
9300-701	301
U	
U106 T8	62
U106 T12	62
U109 00	59, 274
U759 00	65, 135

Series	Page
Pliers	
Inomic	
Z 01 0 15	179
Z 05 0 15	179
Z 12 0 15	179
Inomic VDE	
Z 01 9 16	245
Z 06 9 16	245
Z 12 9 16	245
Basic	
Z 01 0 01	190
Z 02 0 01	190
Z 05 0 01	190
Z 05 1 01	190
Z 07 0 01	190
Z 09 0 01	191
Z 12 0 01	191
Z 16 0 01	191
Z 17 0 01	193
Z 21 0 01	192
Z 22 0 01	192
Z 23 0 01	192
Z 26 0 00	196
Z 26 1 00	196
Z 26 2 00	196
Z 30 0 01	193
Z 31 0 00	193
Z 31 0 01	193
Z 33 0 01	194
Z 33 1 01	194
Z 33 4 01	195
Z 33 5 01	195
Z 34 0 01	194
Z 34 1 01	194
Z 34 4 01	195
Z 34 5 01	195
Z 50 1 01	191
Z 55 0 01	190
Z 60 0 01	191
Z 66 0 00	197
Z 67 0 00	197
Z 67 1 00	197
Z 67 2 00	197
Z 99 0 001 01	198
Z 99 0 002 01	198
Z 99 0 003 01	198
Z 99 0 004 01	199
Z 99 0 007 01	199

Series	Page
Electronic	
Z 36 0 03	203
Z 40 0 03	202
Z 40 1 03	202
Z 41 1 03	201
Z 41 3 03	201
Z 41 6 03	201
Z 46 0 03	202
Z 49 2 03	203
Z 49 7 03	203
Professional ESD	
Z 36 0 04	285
Z 36 1 04	285
Z 37 0 04	285
Z 38 0 04	285
Z 40 1 04	283
Z 40 3 04	283
Z 40 4 04	283
Z 41 1 04	283
Z 41 3 04	283
Z 41 4 04	283
Z 43 1 04	284
Z 44 1 04	284
Z 44 3 04	284
Z 46 1 04	284
Z 46 4 04	284
Z 47 1 04	284
Z 47 2 04	285
Z 99 0 001 04	285
Professional	
Z 01 0 05	181
Z 02 0 05	181
Z 05 0 05	182
Z 05 1 05	182
Z 07 0 05	181
Z 09 0 05	181
Z 12 0 05	182
Z 16 0 05	182
Z 21 0 05	183
Z 22 0 05	183
Z 23 0 05	183
Z 55 0 05	181
Z 65 0 05	183
Z 65 2 05	183
Z 99 0 002 05	184
Z 99 0 003 05	184

Series	Page
Professional electric	
Z 01 0 06	247
Z 02 0 06	247
Z 05 0 06	247
Z 05 1 06	247
Z 07 0 06	247
Z 09 0 06	248
Z 12 0 06	248
Z 14 0 06	248
Z 16 0 06	248
Z 50 1 06	248
Z 55 0 06	247
Z 62 0 000 06	251
Z 62 0 001 06	251
Z 62 0 002 06	251
Z 62 0 003 06	251
Z 62 0 004 06	252
Z 71 1 06	250
Z 71 4 06	250
Z 71 5 06	250
Z 71 6 06	250
Z 99 0 001 06	249
Z 99 0 002 06	249
Industrial	
Z 01 0 02	186
Z 02 0 02	186
Z 05 0 02	187
Z 05 1 02	187
Z 07 0 02	186
Z 09 0 02	186
Z 12 0 02	187
Z 16 0 02	187
Z 21 0 02	188
Z 22 0 02	188
Z 55 0 02	188
Z 99 0 006 02	188

Series	Page
Tweezers	
ZP 01 0 14	287
ZP 06 0 14	287
ZP 07 1 14	287
ZP 09 0 14	287
ZP 11 0 14	288
ZP 15 0 14	288
ZP 16 0 14	288
ZP 18 0 14	288
ZP 20 1 14	288
ZP 20 2 14	288
ZP 24 0 14	289
ZP 25 2 14	289
ZP 25 3 14	289
ZP 46 0 14	287
ZP 50 0 14	289
ZP 99 0 140 02	289

Series	Page

Wiha presentation system.

A good display is the pre-requisite for success.

Perfect presentation increases your success.

The new Wiha presentation system has been developed on the basis of intensive POS analyses.
It combines maximum flexibility with highly effective product presentation, thus boosting your sales figures.

- High profit per area due to optimum stocking concept
- Product presentation for strong sales
- Non-language display headers using pictograms and photos
- Fast, comprehensive information scale system
  Front side; information for the buyer:
  Size, article description, price
  Reverse side; information for the retailer:
  Article number, dimensions, EAN code, order no
- High-grade brand presentation
- Optimum presentation of our product range
- Can be equipped as per requirements
- Easy assembly of all module parts

Are you interested?

Then why don't you request our sales brochure (Art. No. 99202).
It contains all the information you will need for selling our products: Modules, displays, brochures, and lots, lots more.
The majority of purchase decisions are made in front of the presentation system. This is why Wiha has developed a comprehensive sales concept for you.

Innovation

We break new ground.

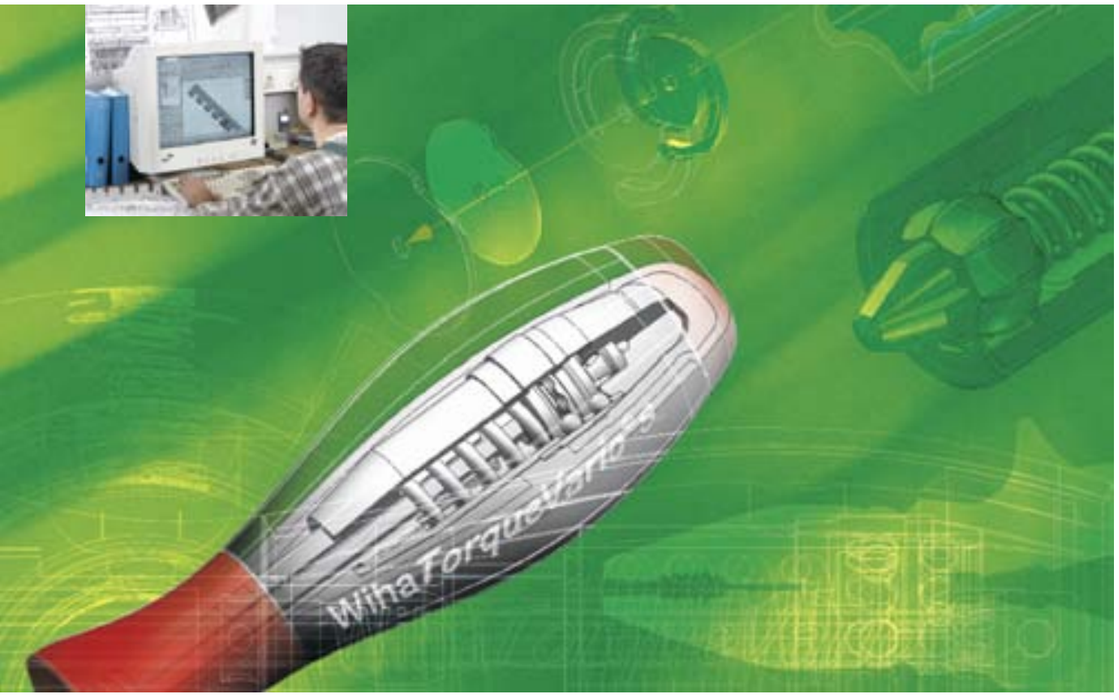

Innovative ideas and actions are the driving force behind our success.

The innovation of our employees

We regard innovation as an important basis if we are to meet the ever changing market requirements.
We create this basis by giving our employees the freedom to act upon their own initiative within the existing, flat hierarchical structure of the company.

In this way, we can operate in a more targeted and individual manner in order to fulfil your wishes and requirements.

The innovation of our processes

Process optimisation ultimately delivers the greatest benefits for you. By putting new innovations into practice, we are able to improve and automate manufacturing and production methods.
Process optimisation enables us to reduce manu-facturing costs without compromising on the quality of our products.

In this way, we can guarantee you lower costs and faster processing.

The innovation of our products

We break new ground. Particularly today when market requirements are changing at an ever more rapid pace, we understand that our challenge is to meet these requirements.
Product innovation represents both the basis and the result of our endeavours. This is manifested in numerous patents and unique selling points.

We believe in our own innovative strength. We also want to do justice to you.

100% innovation

- We are directly responsible for our work and have the necessary freedoms to be able to transform your requirements into specific solutions.
- With the help of new manufactur-ing methods and machines, we realise new ideas in order to offer you high-quality products.
- Process optimisation improves the processing channels and enables us to act more quickly.
- In all areas, innovation forms the basis for meeting your requirements and for penetrating new markets. This is our challenge.
- Our employees create the basis for our innovations.

Quality

Quality starts with the very first contact.

Our employees deliver high-quality products and services on a daily basis.

The quality of our employees

Quality starts with the very first contact. For us, quality means more than just product quality.
First and foremost, the quality of our employees establishes the basis for the high quality of our products.
This is achieved by means of teams of employees working independently and with direct responsibility.

Ongoing education and support strengthen the commitment and qualification of our employees.
Our employees are skilled professionals in whom you will be happy to place your trust.

We should like to impress you with our service competence.

The quality of our processes

Optimisation of the company work processes is another basic principle.

In order to be able to process your requests/wishes competently and more quickly, we work according to strict goals and objectives. Our processes are checked, re-selected and optimised systematically so as to increase quality even more. By means of the highest possible readiness to deliver and a comprehensive service, we guarantee your full satisfaction.

The quality of our products

Our products are characterised by maximum quality, mature function and innovative design.

We guarantee this claim by using only carefully selected materials and by making ongoing improvements to the quality guidelines.

Find out for yourself and benefit from our professional expertise.

Wiha tools are manufactured to the highest standards.
Many years of cooperation with the licensors for TORX®, TORX PLUS®, ACR/AOT, Tri-Wing®, Torq-Set® and Pozidriv give you maximum fitting accuracy of fastening tools in screw heads. True to our motto: Wiha – premium tools.

100% quality

- Independent work as part of a team, with each team player carrying direct responsibility, increases our flexibility and commitment.
- Our quality is characterised by strict guidelines in both the HR and manufacturing areas.
- We work closely with both office and field staff, thus guaranteeing effective communication.
And you benefit from our quality.

Reliability

Agreements are binding and we stick to them.

We are an efficient, reliable partner.
Put us to the test...

100% reliability

- Our reliability is a result of the conscientiousness and willingness of our employees.
- We keep our promises, and do so with competence and reliability.
- We guarantee good value for money.
- Expert advice and sales support is the basic principle that enables us to meet your requirements.
- We guarantee that we'll keep to the agreed dates and appointments, and this does not just apply to the delivery service for our products.
- Reliability is one of our basic principles for ensuring our availability for you.

The reliability of our employees

The manufacture of quality products involves putting not only the quality and durability of the products to the test, but the service associated with the product also has to be just right.

Reliability is an important basis that is further strengthened by the conscientiousness and willingness of our employees. For us, agreements are binding and we stick to them. You benefit from the expertise of our competent, professional employees, as well as from our specialisation.

We want to establish a relationship of trust with you in order to further promote collaboration.

The reliability of our processes

Our manufacturing reliability guarantees top quality. The ongoing modernisation of manufacturing processes enables us to meet your demands. Our processes are determined by structured and consistent communication, the ability to meet deadlines and by dependable delivery dates.

Your enquiries are handled individually and competently. We take your deadlines seriously.

The reliability of our products

Whether you have questions about our products or the appropriate presentation, our office and field staff are there for you.

For us, product training and education are all par for the couse. We'll advise you quickly and competently. Reliability is no coincidence.

We only work with selected suppliers in order to be able to offer you optimum product quality. We guarantee ongoing quality and functional reliability, both today and tomorrow.

Our products live up to expectations.

Innovation
Quality
Reliability

Wiha General Terms of trading.

Terms and conditions of sale, delivery and payment. Effective as of March 2007.

1. Validity. These terms and conditions shall be binding in respect of all orders. Any departures from them or secondary verbal agreements shall be valid only if confirmed by us in writing. We will not accept the terms and conditions of the customer even if we do not expressly refuse to accept them. By placing his order the customer acknowledges our terms and conditions. Events beyond our reasonable control and instances of force majeure shall release us from commitments entered into.

2. Offers. All offers are made without obligation. Our currently valid catalogues or price lists form an integral part of our offers. Samples are invariably supplied against payment.

3. Orders. Orders shall not be deemed accepted by us until we have confirmed them in writing. This provision shall also apply to orders taken by our representatives. The acceptance of an order does not place us under any obligation to accept follow-on orders under the same conditions.

4. Prices. Prices are quoted in Euros (€), excluding value-added tax at the statutory rate. Prices are quoted without obligation and are applicable to delivery ex works, excluding packaging. If the agreed delivery date is more than 6 weeks after the time the purchase agreement is concluded, we reserve the right to make appropriate adjustments to our prices due to general increases in wage, material or marketing costs or if higher rates of public taxes and similar charges are imposed. All prices are basic prices; in the event of resale by the trade, however, they are non-binding target prices and do not constitute a price recommendation.

5. Delivery. All deliveries are made at the risk of the consignee even if delivery is agreed carriage paid to destination. Deliveries shall be made for the account of the consignee. We will effect delivery using the method of shipment considered most suitable for the goods in question. For small orders up to a net value of EUR 300.00, we will invoice an administration and delivery fee of EUR 6.00. Goods with a net value of EUR 500.00 or more will be supplied to foreign customers free to the German border or FOB German sea port, including packaging. Deliveries of goods with a lower value will be made ex works excluding packaging. In the case of orders that do not conform to our packaging units we reserve the right to deliver the goods in a manner compatible with our packaging units, otherwise a surcharge of 10% will be charged.

6. Delivery lead time. As a general rule, we deliver all articles listed in our catalogue ex warehouse or within a few days. In all other cases, we will state the anticipated delivery lead time, which depends on our workload; however, we shall not be bound by the lead time quoted. If the lead time is exceeded by us the customer may, to the exclusion of all other claims, withdraw from the contract upon the lapse of a reasonable extension allowed by him. Partial deliveries shall be permitted. If performance is delayed for reasons attributable to the customer, we shall not be bound by our delivery dates. If the customer does not take remedial action immediately, we shall be entitled to claim compensation for the additional costs incurred by us or withdraw from the contract after the lapse of a reasonable extension.

7. Terms of payment. Our invoices are payable within 10 days of the date of the invoice less 2% discount or net within 30 days from the invoice date. Invoices for goods with a value of less than EUR 50.00 are due for payment immediately and without any deductions. Payments by cheque, bank transfers or cash payments made against presentation of a bill made out by us and accepted by the customer shall be deemed to have been effected after the bill has been honoured by the drawee thus discharging us from any liability under the bill. The agreed reservation of title shall remain effective in our favour until the bill has been collected.

8. Property rights. We reserve title and copyright in illustrations, drawings and other documentation.

9. Reservation of title.
9.1 All deliveries will be made with reservation of title. The products delivered (reserved goods) shall remain our property until the customer has met all his obligations arising from the contractual relationship with us. The risk of loss of or damage to the reserved goods shall be borne by the customer, also during the period this reservation of title is effective.
9.2 During the time this reservation of title is effective the customer shall not be entitled to pledge the reserved goods or to assign them by way of security. The customer is entitled to sell the goods owned by us (reserved goods) in the normal course of business. However, the customer already cedes all accounts receivable from this resale to us.
9.3 Processing or alteration of the reserved goods is without obligation to us as a manufacturer as per Section 950 of the German Civil Code. If the reserved goods are processed together with other objects, we shall acquire a co-ownership in the new object in the ratio of the current market value of our goods to the value of the other processed objects at the time of processing. The customer will store the new object for us with due care and attention free of charge.
9.4 If the value of all security interests we are entitled to exceeds the amount of all secured claims by more than 20%, we will release a corresponding portion of the security interests at the written request of the customer.
9.5 The customer shall inform us without delay in case of garnishments, confiscations or other court orders or interventions by third parties.
9.6 If the customer violates contractual obligations, particularly if the customer is in payment default, we shall be entitled, after an appropriate deadline that we set for the customer to make payment lapses without success, to withdraw from the contract and demand the return of our goods. The legal provisions regarding the dispensability of setting a deadline shall remain unaffected. The customer shall be obligated to surrender the goods.

10. Warranty for defects. The customer shall be entitled to warranty claims under fully commercial business transactions only if he has discharged his obligations in respect of examination and notification of defects without delay and as prescribed by Section 377 of the German Commercial Code (HGB). Any defects in the purchased goods for which we are responsible shall be repaired or a replacement supplied, at our discretion. The warranty refers to the condition of the goods upon delivery. Subsequent damage due to normal aging, wear or excessive use is not covered by the warranty.
Liability for harm to life, limb and health due to a culpable breach of obligations by us, one of our legal representatives or one of our agents shall neither be excluded nor limited. We shall be liable for such harm on the part of our contractual partner only if said harm was due to an intentional or grossly negligent breach of obligations by us, one of our legal representatives or one of our agents. If we caused the harm only due to simple negligence, we shall be liable only if the harm was due to a violation of key contractual obligations, limited to the harm that is reasonably foreseeable and typical for this type of contract.
Further claims by the customer shall be excluded, irrespective of their legal grounds. The exclusions of liability shall also apply in all cases to consequential damage. The above exclusions of liability to not apply to claims based on the Product Liability Act.

11. Returns. Perfectly packaged goods from the current catalogue which do not require any further processing will be credited with a deduction of up to 20% of the corresponding order value.

12. Dimensions and weights. The dimensions, drawings and illustrations contained in offers, brochures, catalogues and price lists shall not be binding and may be modified by us without further notice. All dimensions are quoted in mm and all weights in g.

13. Special manufacture. In the case of special manufacture, we reserve the right to deliver up to 10% more or less. Orders for special products cannot be cancelled. The same provision shall also apply to series production articles if they were ordered with a special symbol or special marking.

14. Place of performance and jurisdiction. The place of performance for deliveries and payments shall be Schonach/Schwarzwald (Germany). All disputes arising from the business relationship shall be referred to the court under whose jurisdiction Schonach falls.

Subject to technical changes.

All illustrations and graphics, specified dimensions and values and references to standards, e.g. DIN/EN, are non-binding. Any liability claims based on this will therefore be rejected.

No liability claims will be accepted for printing errors and mistakes which have occurred during the production of the catalogue.

All property rights to the catalogue held by Wiha Werkzeuge GmbH are reserved. The printing or copying of the texts and illustrations contained in this catalogue or its design is prohibited.

Our General Terms and Conditions (Terms of Sale, Delivery and Payment) apply.

TORX®, TORX PLUS® = Registered Trademarks of Acument

ACR/AOT, Tri-Wing®, Torq-Set® = Registered Trademarks of Phillips Screw Company

Pozidriv = Registered Trademark of European Industrial Services Ltd.

Wiha information system

Wiha product information.

On these pages you will find important information you need to know to use and order our products correctly and easily.

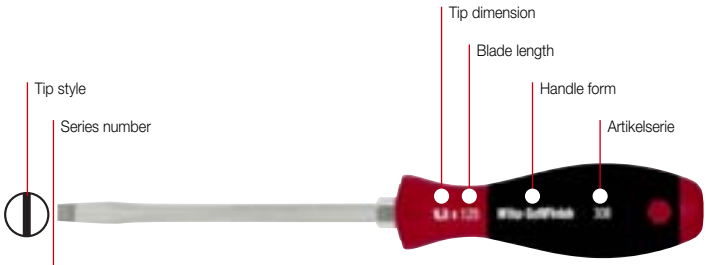

308 **SoftFinish® slotted screwdriver.**
Hex blade with hex bolster.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 5265, ISO 2380.

Application: Especially for dry and general applications.

Order-No.								
00731 7	3,5	75	0,6	4,0	-	186	30	10
00732 4	4,5•	90	0,8	4,0	-	201	30	10
00733 1	5,5	100	1,0	5,0	8	213	36	10
00734 8	6,5	125	1,2	6,0	10	238	36	10

• Additional dimension. Non-DIN size.

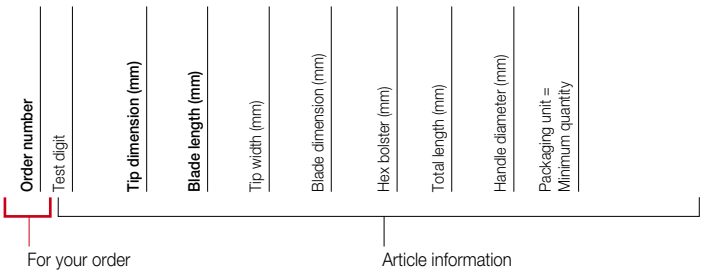

Wiha product search system.

The catalogue contains five different search systems:

1. **Product groups.**
   On page 5 you will find an overview of all product groups.

2. **Based on product lines.**
   You can find a short summary based on product lines on page 4.

3. **Tips styles.**
   On pages 302 to 303 you will find a matrix with all tip styles.

4. **Order number.**
   On pages 310 to 317 you will find all order numbers in a numerical index.

5. **Series number.**
   On pages 318 to 319 you will find an overview of the Wiha article series in a numerical index.

Symbols key

Drive
- Triangular nut
- Nut driver
- Square nut
- Hex
- Hex with hole (Tamper Resistant)
- Hex with pivot
- Square
- IPR (TORX PLUS® Security)
- Countersink
- Combination drill
- Phillips PH
- Pozidriv PZ
- Robertson
- Rondblade
- Slotted
- Slotted nut
- SIT
- Spanner
- Twist drill
- Sliding sleeve
- Torq-Set®
- TORX®
- TORX® Tamper Resistant
- TORX PLUS®
- Tri-Wing®
- Multitooth
- Square reaming blade

Suitable for
- Square nut
- Drive style G7
- Screw thread drive
- SDS-Plus®
- Hex

Screwdrivers [mm]
- Tip dimension
- Tip width
- Blade dimension
- Blade dimension
- Hex bolster
- Scraper width
- Tip gap
- Tip width
- Small head diameter
- Large head diameter
- Reversible blade length
- Reversible blade length
- Adapter reversible blade length
- Bit holder
- Blade length
- Total length
- Handle width
- Blade length
- Arm length
- Total length
- Handle length
- Handle diameter
- Topra-handle length
- Topra-handle width
- Torque T-handle length
- Torque T-handle width
- max. Nm — Max. torque [Nm]
- max. in.lbs. — Max. torque [in.lbs]

Hex L-keys [mm]
- Blade dimension
- Blade dimension
- Hex bolster
- Total length
- Arm length
- Blade length
- Side driver length
- Total length
- Handle width
- Handle diameter
- Total length
- Arm length

Bits [mm]
- Blade diameter
- Bit length
- Threaded bit
- Bit holder length
- Total length
- Flute length
- Srew size
- Bit holding socket length
- Socket length

Pliers [mm]
- Flat jaws
- Half round jaws
- Round jaws
- Cutter without bevel
- Cutter with smallbevel
- Cutter with bevel
- Anvl cutter
- Center cutter
- Scissors cutter
- Stripper
- mm — Pliers length [mm]
- " — Pliers length [inch]
- Soft wire
- Medium hard wire
- Hard wire
- Piano wire
- Ø mm — Max. diameter
- mm² — Max. cross-section
- Max. gripper pipe diameter
- Max. gripper width across flats
- Retaining ring, external
- Retaining ring, internal
- Clamping range
- Opening width, flat

Soft-face hammer [mm]
- Face diameter
- Face width
- Hammer head width
- Total length

Measurement tools [mm]
- Scale width
- Colour
- Measurement capacity [mm]
- Measurement capacity [inch]
- Segment quantity
- Max. length, assembled
- Flat nozzle width
- Threaded connector

General symbols
- Weight [g]
- Packaging unit

Wiha world-wide

We speak your language...

Wiha Tools Ltd.
Avon House
Buntsford Drive
Stoke Heath
Bromsgrove B60 4JE
Tel. +44 1527 57 57 58, 91 09 86
Fax +44 1527 88 81 20
info.uk@wiha.com
www.wiha.com

Wiha France
Z. A. de Terrefort
F-33520 Bruges / France
Tel. +33 5 56 16 79 35
Fax +33 5 56 16 79 36
servicecommercial@wiha.fr
www.wiha.com

Wiha Nordic A/S
Korskildelund 6
DK-2670 Greve
Tel. +45 70 23 80 45
Fax +45 70 23 80 46
info.nordic@wiha.com
www.wiha.com

Willi Hahn S.A.
Avda. del Cobre, 15
E-28914 Leganés/Madrid
Tel. +34 91 693 85 11
Fax +34 91 693 63 83
iberia@wiha.com
www.wiha.com

Wiha Polska Sp. z o.o.
ul. Budowlanych 10 b
PL-80-298 Gdańsk
Tel. +48 58 762 38 30
Fax +48 58 762 39 00
info.pl@wiha.com
www.wiha.com

Willi Hahn Corp.
1348, Dundas Circle
Monticello, MN 55362/USA
Tel. +1 763 2 95 65 91
Fax +1 763 2 95 65 98
cservice@wihatools.com
www.wihatools.com

Wiha Tools Canada Ltd.
249 Summerlea Road
L6T 4X4 Brampton, ON
Tel. +1 763-295-6591
Fax +1 763-295-6591
mihran@wihatools.com
www.wihatools.com

Wiha Asia Pacific Pte. Ltd.
25 International Business Park
#02 – 102 German Centre
Singapore 609916
Singapore
Tel. +65 6563 1277
Fax +65 6563 7168
info.sg@wiha.com
www.wiha.com

Wiha Tools (India) Pvt. Ltd.
Jivan Vihar, 2nd Floor, 18,
Modi Street, Fort,
Mumbai – 400001,
Maharashtra, India
Tel. +91 22 226 944 14
Fax +91 22 226 989 36
info.in@wiha.com
www.wiha.com

Wiha Werkzeuge GmbH
Shanghai Rep. Office
SHA Zhaofong Universe Building
at 24th floor
No. 1800 Zhongshangxie Road
Shanghai / China
Tel. +86 21 6440 1119
Fax +86 21 6440 1112
www.wihachina.com

Technical modifications reserved!
Art-No.: 9900101 | FB-MA-870-02/10-17 | Printed in Germany

wiha
Premium Tools

Wiha Werkzeuge GmbH
Obertalstraße 3–7
D-78136 Schonach/Germany
Tel. +49 7722 959-0
Fax +49 7722 959-159 Inland
Fax +49 7722 959-155 Export
info@wiha.com
www.wiha.com